



5726

TWIN DIODE

MINIATURE TYPE

Intended for applications where dependable performance under shock and vibration is paramount.

The 5726 is a "premium" version of the 6AL5W.

5726
PREMIUM TYPE

GENERAL DATA**Electrical:**

Heater, for Unipotential Cathodes:

Voltage $6.3 \pm 10\%$ ac or dc volts

Current 0.3 amp

Resonant Frequency (Each unit, approx.) 700 Mc

Direct Interelectrode Capacitances

(With external shield JETEC No.316):

Unit No.1:Plate to Cathode + External Shield,
Heater, and Internal Shield 3.2 μf Cathode to Plate + External Shield,
Heater, and Internal Shield 3.9 μf **Unit No.2:**Plate to Cathode + External Shield,
Heater, and Internal Shield 3.2 μf Cathode to Plate + External Shield,
Heater, and Internal Shield 3.9 μf Plate of Unit No.1 to Plate of Unit No.2* 0.026 max. μf **Mechanical:**

Mounting Position Any

Maximum Overall Length $1\text{--}3/4"$ Maximum Seated Length $1\text{--}1/2"$ Length, Base Seat to Bulb Top (Excluding tip) $1\text{--}1/8" \pm 3/32"$ Maximum Diameter $3/4"$


Bulb T-5-1/2

Base Small-Button Miniature 7-Pin (JETEC No.E7-1)

BOTTOM VIEWPin 1 - Cathode of
Diode Unit
No.1Pin 2 - Plate of
Diode Unit
No.2

Pin 3 - Heater

Pin 4 - Heater

Pin 5 - Cathode of
Diode Unit
No.2Pin 6 - Internal
ShieldPin 7 - Plate of
Diode Unit
No.1**HALF-WAVE RECTIFIER****Maximum Ratings, Absolute Values:**

PEAK INVERSE PLATE VOLTAGE 360 max. volts

PEAK PLATE CURRENT PER PLATE 60 max. ma

• With external and internal shield connected to ground.

SEPT. 1, 1952

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5726



5726

TWIN DIODE

HOT-SWITCHING TRANSIENT PLATE CURRENT

For duration of 0.2 second maximum . . .	350 max.	ma
--	----------	----

DC OUTPUT CURRENT PER PLATE	10 max.	ma
---------------------------------------	---------	----

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode	360 max.	volts
Heater positive with respect to cathode	360 max.	volts

Typical Operation:

The two units may be used separately or in parallel

AC Plate-Supply Voltage		
Per Plate (RMS)	117	volts
Minimum Total Effective Plate-Supply		
Impedance Per Plate	300	ohms
DC Output Current Per Plate	9	ma

Shock and Vibration Tests:

These tests are made as indicated in the JAN Specifications: JAN 1-A for Electron Tubes, May 1946 under the section as follows:

Section F6b (9e) Shock Test:

Instantaneous Impact Acceleration . .	700 max.	g
---------------------------------------	----------	---

Section F6b (9f) Vibration Test:

Vibrational Acceleration	2.5 max.	g
------------------------------------	----------	---

Heater Cycling Life Test:

This test is made as indicated in the JAN Specifications JAN 1-A for Electron Tubes for type 5726/6AL5W.

Cycles of Intermittent Operation:

At a heater voltage of 7.5 volts . . .	2000 min. cycles	
--	------------------	--

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.275	0.325	amp
Direct Interelectrode Capacitances (With external shield JETEC No.316):				
Unit No.1:				
Plate to Cathode+ External Shield, Heater, and Internal Shield	-	2.4	4.0	μf
Cathode to Plate+ External Shield, Heater, and Internal Shield	-	2.8	4.4	μf
Unit No.2:				
Plate to Cathode+ External Shield, Heater, and Internal Shield	-	2.4	4.0	μf
Cathode to Plate+ External Shield, Heater, and Internal Shield	-	2.8	4.4	μf



5726

5726

TWIN DIODE

	Note	Min.	Max.
--	------	------	------

Plate of Unit No.1 to Plate of			
--------------------------------	--	--	--

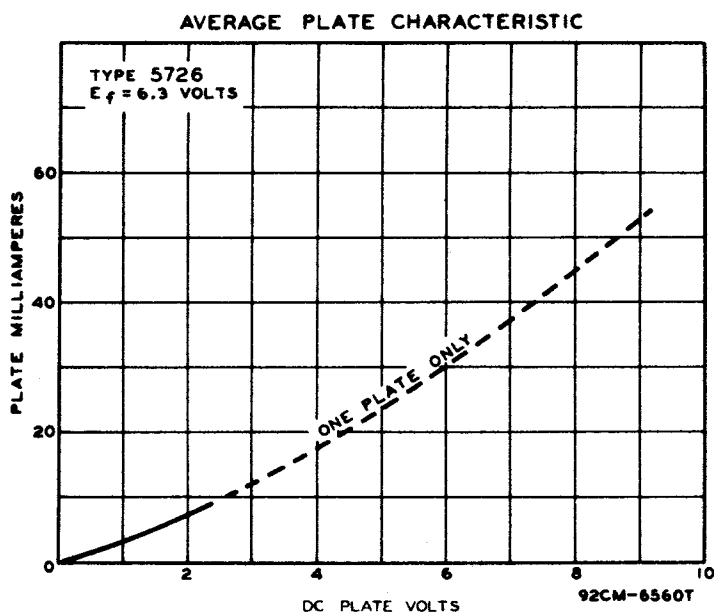
Unit No.2	2	-	0.026 $\mu\mu\text{f}$
---------------------	---	---	------------------------

Plate Current (Per Plate) . . .	1,3	40	- ma
---------------------------------	-----	----	------

Note 1: With 6.3 volts ac on heater.

Note 2: With external and internal shield connected to ground.

Note 3: With dc plate voltage = 10 volts. Each unit tested separately with electrodes of opposite unit grounded.

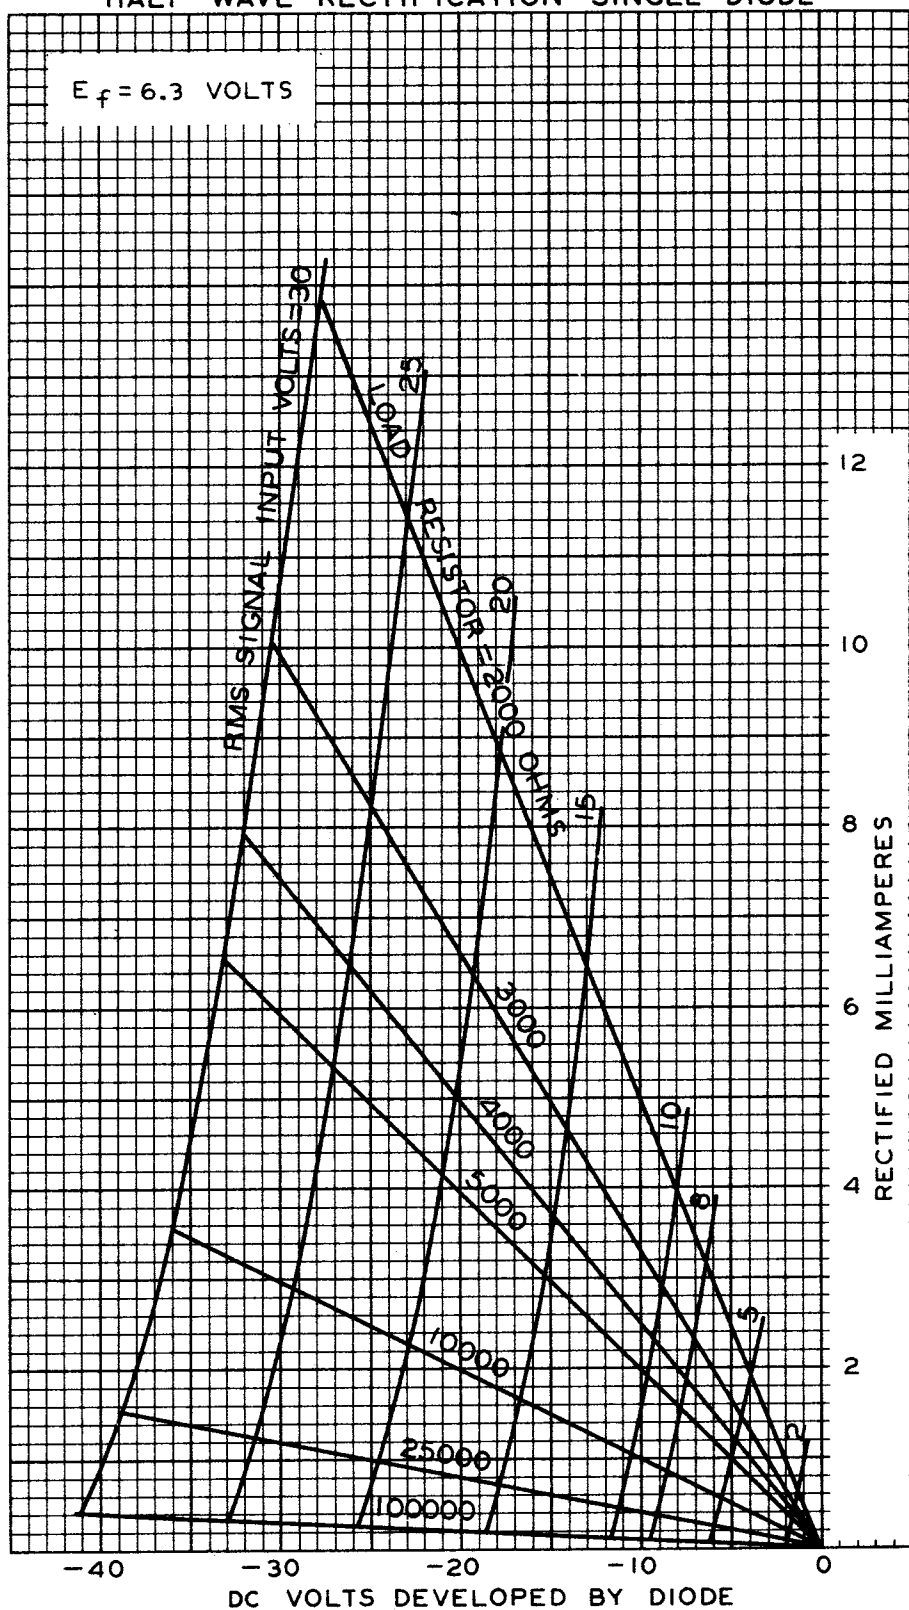


5726



5726

AVERAGE CHARACTERISTICS HALF-WAVE RECTIFICATION-SINGLE DIODE

 $E_f = 6.3 \text{ VOLTS}$


JUNE 7, 1944

 TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6561