

Magnetrons for microwave heating

Elcoma – Philips Electronic Components and Materials Division – embraces a world-wide group of companies operating under the following names:

IBRAPE

PHILIPS

MBLE

RTC

Miniwatt

signetics

Mullard

VALVO

Elcoma offers you a technological partnership in developing your systems to the full. A partnership to which we can bring

- world-wide production and marketing
- know-how
- systems approach
- continuity
- broad product line
- fundamental research
- leading technologies
- applications support
- quality

MAGNETRONS FOR MICROWAVE HEATING

pa	ge
election guide	1
eneral	
List of symbols	5
Definitions	
Waveguide data	9
Flange designations	
General operational recommendations	1
Rating system	
evice data (alpha numerically)	9
ndex of type numbers	0

DATA HANDBOOK SYSTEM

Our Data Handbook System comprises more than 60 books with specifications on electronic components, subassemblies and materials. It is made up of four series of handbooks:

ELECTRON TUBES

BLUE

SEMICONDUCTORS

RED

INTEGRATED CIRCUITS

PURPLE

COMPONENTS AND MATERIALS

GREEN

The contents of each series are listed on pages iv to viii.

The data handbooks contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

When ratings or specifications differ from those published in the preceding edition they are indicated with arrows in the page margin. Where application information is given it is advisory and does not form part of the product specification.

Condensed data on the preferred products of Philips Electronic Components and Materials Division is given in our Preferred Type Range catalogue (issued annually).

Information on current Data Handbooks and on how to obtain a subscription for future issues is available from any of the Organizations listed on the back cover.

Product specialists are at your service and enquiries will be answered promptly.

ELECTRON TUBES (BLUE SERIES)

The blue series of data handbooks comprises:

- T1 Tubes for r.f. heating
- T2a Transmitting tubes for communications, glass types
- T2b Transmitting tubes for communications, ceramic types
- T3 Klystrons, travelling-wave tubes, microwave diodes
- ET3 Special Quality tubes, miscellaneous devices (will not be reprinted)
- T4 Magnetrons for microwave heating
- T5 Cathode-ray tubes
 Instrument tubes, monitor and display tubes, C.R. tubes for special applications
- T6 Geiger-Müller tubes
- T7 Gas-filled tubes

Segment indicator tubes, indicator tubes, dry reed contact units, thyratrons, industrial rectifying tubes, ignitrons, high-voltage rectifying tubes, associated accessories

T8 Picture tubes and components

Colour TV picture tubes, black and white TV picture tubes, colour monitor tubes for data graphic display, monochrome monitor tubes for data graphic display, components for colour television, components for black and white television and monochrome data graphic display

T9 Photo and electron multipliers

Photomultiplier tubes, phototubes, single channel electron multipliers, channel electron multiplier plates

- T10 Camera tubes and accessories
- T11 Microwave semiconductors and components
- T12 Vidicons and Newvicons
- T13 Image intensifiers
- T14 Infrared detectors
- T15 Dry reed switches
- Data collations on these subjects are available now.

 Data Handbooks will be published in 1985.
- T16 Monochrome tubes and deflection units

 Black and white TV picture tubes, monochrome data graphic display tubes, deflection units

SEMICONDUCTORS (RED SERIES)

The red series of data handbooks comprises:

S1	Diodes Small-signal germanium diodes, small-signal silicon diodes, voltage regulator diodes (< 1,5 W) voltage reference diodes, tuner diodes, rectifier diodes	,
SZ	a Power diodes	
SZ	b Thyristors and triacs	
S	Small-signal transistors	
SA	a Low-frequency power transistors and hybrid modules	
S4	b High-voltage and switching power transistors	
SE	Field-effect transistors	
Se	R.F. power transistors and modules	
S7	Surface mounted semiconductors	
S	Devices for optoelectronics Photosensitive diodes and transistors, light-emitting diodes, displays, photocouplers, infrared sensitive devices, photoconductive devices.	
SS	Power MOS transistors	
Si	0 Wideband transistors and wideband hybrid IC modules	
S	Microwave semiconductors (to be published in this series in 1985) At present available in Handbook T11	
S	2 Surface acoustic wave devices	

INTEGRATED CIRCUITS (PURPLE SERIES)

The purple series of data handbooks comprises:

EXISTING SERIES

IC1	Bipolar ICs for radio and audio equipment
IC2	Bipolar ICs for video equipment
IC3	ICs for digital systems in radio, audio and video equipment
IC4	Digital integrated circuits CMOS HE4000B family
IC5	Digital integrated circuits — ECL ECL10 000 (GX family), ECL100 000 (HX family), dedicated design
IC6	Professional analogue integrated circuits
IC7	Signetics bipolar memories
IC8	Signetics analogue circuits
IC9	Signetics TTL logic
IC10	Signetics Integrated Fuse Logic (IFL)

Microprocessors, microcomputers and peripheral circuitry

IC11

NEW SE	RIES	
IC01N	Radio, audio and associated systems Bipolar, MOS	
IC02N	Video and associated systems Bipolar, MOS	
IC03N	Telephony equipment Bipolar, MOS	
IC04N	HE4000B logic family CMOS	
IC05N	HE4000B logic family uncased integrated circuits CMOS	(published 1984)
IC06N	PC54/74HC/HCU/HCT logic families HCMOS	
IC07N	PC54/74HC/HCU/HCT uncased integrated circuits HCMOS	
IC08N	10K and 100K logic family ECL	(published 1984)
IC09N	Logic series TTL	(published 1984)
IC10N	Memories MOS, TTL, ECL	
IC11N	Analogue - industrial	χ.
IC12N	Semi-custom gate arrays & cell libraries ISL, ECL, CMOS	
IC13N	Semi-custom integrated fuse logic IFL series 20/24/28	
IC14N	Microprocessors, microcontrollers & peripherals	

Note

IC15N

Bipolar, MOS

Logic series FAST TTL

Books available in the new series are shown with their date of publication.

(published 1984)

COMPONENTS AND MATERIALS (GREEN SERIES)

The green series of data handbooks comprises:

- C1 Programmable controller modules
 PLC modules, PC20 modules
- C2 Television tuners, video modulators, surface acoustic wave filters
- C3 Loudspeakers
- C4 Ferroxcube potcores, square cores and cross cores
- C5 Ferroxcube for power, audio/video and accelerators
- C6 Synchronous motors and gearboxes
- C7 Variable capacitors
- C8 Variable mains transformers
- C9 Piezoelectric quartz devices

 Quartz crystal units, temperature compensated crystal oscillators, compact integrated oscillators, quartz crystal cuts for temperature measurements
- C10 Connectors
- C11 Non-linear resistors
 Voltage dependent resistors (VDR), light dependent resistors (LDR), negative temperature coefficient thermistors (NTC), positive temperature coefficient thermistors (PTC)
- C12 Variable resistors and test switches
- C13 Fixed resistors
- C14 Electrolytic and solid capacitors
- C15 Ceramic capacitors*
- C16 Permanent magnet materials
- C17 Stepping motors and associated electronics
- C18 D.C. motors
- C19 Piezoelectric ceramics
- C20 Wire-wound components for TVs and monitors
- C21 Assemblies for industrial use
 HNIL FZ/30 series, NORbits 60-, 61-, 90-series, input devices

viii October 1984

^{*} Film capacitors are included in Data Handbook C22 which will be published in 1985. The September 1982 edition of C15 should be retained until C22 is issued.

SELECTION GUIDE

TYPES RECOMMENDED FOR NEW EQUIPMENT DESIGN

Wo kW	type of magnet	Va kV	la A	cooling	frequency MHz	type	page
0,31	perm. magnet	3,0	0,15	1		YJ1511	123
0,31	electromagnet	3,0	0,15	forced air	2460	YJ1530 YJ1540	131
1,26 5,0	perm, magnet electromagnet	3,0 4,5	0,40 0,95	water		YJ1600	147

MAINTENANCE TYPES (types still in current production but not recommended for new equipment design)

Wo kW	type of magnet	Va kV	la A	cooling	frequency MHz	type	page
0,265)	3,0 4,0	0,15 0,38	forced air	2455 2450	YJ1510 YJ1500	115 107
3,0		5,8	0,8	1	2425—2475	YJ1442	87
6,0 6,0 6,0	perm. magnet			water	2430-2470	YJ1191* YJ1193 YJ1195**	40 41 41
6,0	J	7,2	1,25		2400-2350	YJ1194	68
6,0 6,0	electromagnet				2430-2470	YJ1193E YJ1195E**	55 55

OBSOLESCENT TYPES (types no longer in production but available as long as stocks last)

type	page
YJ1160	31
YJ1162	38
YJ1280	69
YJ1441	77
YJ1481	97
7090	157

^{*} Type without R.F. filter box.

^{**} R.F. filter box turned 90° with respect to types YJ1193 and YJ1193E.

GENERAL

提出(P. 1947)

LIST OF SYMBOLS

a Anode B Bandwidth

Capacitance between anode and cathode (all other elements being earthed)

d Distance of voltage standing wave minimum

 $\frac{dV_a}{dt}$, $\frac{\Delta V}{\Delta t_{rv}}$ Rate of rise voltage

f Filament or heater or frequency

fimp Pulse repetition rate
H Magnetic field strength

I_a Anode current
I_{ap} Peak anode current

If Filament or heater current

Ifo Filament or heater starting current
Peak filament or heater starting current

P Pressure

Pi Pressure drop of cooling air or cooling water

Required air flow or water flow for cooling

T Temperature

Ta Temperature of anode or anode block

Tamb Ambient temperature

T_i Inlet temperature of cooling air or cooling water

timp Pulse duration

To Outlet temperature of cooling air or cooling water

t_W Cathode preheating time

 $\begin{array}{ccc} V_a & & \text{Anode voltage} \\ V_{ap} & & \text{Peak anode voltage} \\ V_f & & \text{Filament or heater voltage} \end{array}$

V fo Filament or heater starting voltage VSWR Voltage standing-wave ratio

Wia D.C. anode supply power
Wib Peak input power

 Wo
 Output power

 Wop
 Peak output power

 δ
 Duty factor

GENERAL

 $\frac{\Delta f}{\Delta I_{a}}$ $\frac{\Delta f}{\Delta T}$ Δf_{p} η λ

Pushing figure of a magnetron

Frequency temperature coefficient

Pulling figure of a magnetron Efficiency

Wavelength

DEFINITIONS

- f The frequency f is measured at maximum instantaneous output power when the tube is coupled into a matched load (VSWR \leq 1,05).
- Δf_p The pulling figure Δf_p is the difference between the maximum and minimum frequencies, reached when the phase angle of the load with a VSWR of 1,5 is varied from 0° to 360°.
- I_a The mean anode current I_a is the average anode current through the magnetron as measured with a moving-coil instrument (or equivalent method).
- I_{ap} The peak anode current I_{ap} is the maximum instantaneous anode current value during the current pulse.
- timp The pulse duration t_{imp} is defined as the time interval between the two points on the current pulse at which the current is 50% of the smooth peak current (see Fig. 1).




Fig. 1 Current pulse.

The smooth peak is the maximum value of a smooth curve through the average of the fluctuation over the top portion of the pulse.

- The time of rise of voltage $t_{\rm rV}$ is defined as the time interval between points of 20 and 85 per cent of the smooth peak value measured on the leading edge of the voltage pulse.
- t_W The cathode preheating time t_W, also called waiting time, is the minimum period of time during which the heater or filament voltage should be applied before the application of electrode voltages.

try

GENERAL

 dV_a/dt or $\Delta V_a/\Delta t_{ry}$ Unless otherwise stated the rate of rise of voltage dV_a/dt is defined by the steepest tangent to the leading edge of the voltage pulse above 80% of the smooth peak value (see Fig. 2).




Fig. 2 Voltage pulse.

- Va The published anode voltage Va is generally the value measured under d.c. power supply and matched load conditions. When a special type of power is published, then the peak anode voltage value Vap is quoted under matched load conditions (or other conditions of matching where applicable).
- Vfo
 Heater voltage before switching on of anode voltage. When the magnetron oscillates, not all electrons reach the anode. These off-phase electrons are driven back to the cathode. This back bombardment contributes to the heating power of the cathode. In order to maintain the total power to the cathode at the rated value, it is therefore necessary in some cases to reduce or even to switch off the heater voltage after application of high voltage.
- - (a) mains input power measurements and correcting for losses in transformer, capacitor, etc.
 - (b) mean anode current times peak anode voltage.
- δ The duty factor δ is the ratio of the pulse duration to the time between corresponding points of two successive pulses.

$$\delta = t_{imp}$$
 (s) x f_{imp} (Hz).

RECTANGULAR WAVEGUIDE DATA AND DESIGNATIONS

FREQUENCY		WAVEGUIDE DESIGNATION	E DESIGN	ATION			Inner	MAVEGUIDE Inner cross-section 153-IEC*	ction		Outer cro.	WAVEGUIDE Outer cross-section 153-IEC*	for o	ATTENUATION in dB/m for copper waveguide 153-IEC*	dB/m uide	Theoretical C. W.
TE ₁₀ - mode 153-IEC* GHz	153-IEC*	BRITISH STAND.	RETMA	PG- brass	JAN RG- /U ss alum.	BAND	Width	Height	Tolerance on width and height	Width	Height	Tolerance on width and height	Frequency	Theoretical value	Maximum	lowest to highest frequency MW
1.14- 1.73	R 14	WG 6	WR 650	69	103	١,	165.10	82.55	0 33	91 691	19 98	0 20	1 36	0.00522	0.007	120 -170
1.45 - 2.20	R 18	WG 7	WR 510	1	1	a	129 54	64.77	0.26	133.60	68 83	0.20	1 74	0 00749	0 0 0 0	7.5 -11.0
1.72 - 2.61	R 22	WG 8	WR 430	104	105	1	109 22	54.61	0 22	113 28	58 67	0.20	2 06	0.00970	0.013	52 - 75
2.17 - 3.30	R 26	WG 9A	WR 340	112	113	1	86.36	43.18	0.17	90.42	47.24	0 17	2 61	0.0138	0.018	34 - 48
2.60 - 3.95	R 32	WG 10	WR 284	48	75	S	72 14	34.04	0.14	76 20	38 10	0 14	3 12	0 0 189	0 025	22 - 32
3.22 - 4.90	R 40	WG 11A	WR 229	1	1	A	58 17	29 083	0.12	61 42	32 33	0 12	3 87	0 0249	0 032	16 - 22
3.94 - 5.99	R 48	WG 12	WR 187	49	95	O	47.55	22.149	960.0	50.80	25.40	0.095	4 73	0 0355	0 046	0.94 - 1.32
4.64 - 7.05	R 58	WG 13	WR 159	1	1	O	40 39	20.193	:80:0	43.64	23 44	0.081	5.57	0 0431	9500	0.79 - 1.0
5.38 - 8.17	R 70	WG 14	WR 137	20	106	-	34 85	15.799	0.070	38.10	19.05	0.070	6 46	0.0576	0.075	0.56 - 0.71
6.57 - 9.99	R 84	WG 15	WR 112	51	89	I	28.499	12.624	0.057	31.75	15.88	0.057	7 89	0 0 0 7 9 4	0 103	0.35 - 0.46
7.00 - 11.00	ı	1	WR 102	1	320	1	25.90	12.95	0.125	29.16	16.21	0 125	1	1	1	0 33 - 0 43
8.2 - 12.5	B 100	WG 16	WR 90	52	19	×	22.860	10.160	0.046	25.40	12.70	0.05	9.84	0110	0 143	0.20 - 0.29
9.84 - 15.0	R 120	WG 17	WR 75	1	1	Σ	19.050	9.525	0.038	21.59	12.06	0.05	118	0 133	1	0.17 - 0.23
11.9 - 18.0	R 140	WG 18	WR 62	16	1	а	15.799	7.899	0.03	17.83	9.93	0.05	14.2	0 176	1	0.12 - 0.16
14.5 - 22.0	R 180	WG 19	WR 51	1	1	I	12.954	6.477	0.026	14.99	8.51	0.05	17.4	0 238	ī	0.080 - 0.107
17.6 - 26.7	R 220	WG 20	WR 42	53	121	1	10.668	4.318	0.02	12.70	6.35	0.05	21.1	0.370	1	0.043 - 0.058
21.7 - 33.0	R 260	WG 21	WR 34	1	1	1	8.636	4.318	0.020	10.67	6.35	0.05	26 1	0.435	1	0.034 - 0.048
26.4 - 40.0	R 320	WG 22	WR 28	1	1	-	7.112	3.556	0.020	9.14	5.59	0.05	31.6	0.583	J	0.022 - 0.031
32.9 - 50.1	R 400	WG 23	WR 22	1	1	1	5.690	2.845	0.020	7.72	4.88	0 05	39.5	0.815	1	0 0 0 1 4 - 0 0 2 0
39.2 - 59.6	R 500	WG 24	WR 19	1	1	1	4.775	2.388	0.020	6.81	4.42	0.05	47.1	1 060	1	0.011 - 0.015
49.8 - 75.8	R 620	WG 25	WR 15	1	I	1	3.759	1.880	0.020	5.79	3.91	0.05	59.9	1.52	1	0600 0 - 8900 0
60.5 - 91.9	R 740	WG 26	WR 12	1	1	1	3.099	1.549	0.020	5.13	3.58	0.05	72.6	2.03	1	0.0042 - 0.0060
73.8 -112.0	B 900	WG 27	WR 10	1	1		2.540	1.270	0.020	4.57	3.30	0.05	988.6	2.74	Samu	0.0030 - 0.0041
92.2 -140.0	R 1200	WG 28	WR 8	1	1	1	2.032	1.016	0.020	4.06	3.05	0.05	111.0	3 82	1	0.0018 - 0.0026
114.0 -173.0	R 1400	WG 29	WR 7	1	1	-	1.651	0.826	-	1	1	1	1363	5.21	1	0 0012 - 0 0017

** based on breakdown of arr of 15,000 volts per cm (safety factor of approx .2 at sea level)

• IEC Recommendations are obtainable from : Central Office of the International Electrotechnical Commission

1, rue de Varembé GENEVA, Switzerland

FLANGE DESIGNATIONS

			FLANGE DE	SIGNATION	1	
FOR	PLAIN	FLANGE	CHOKE FLANGE			
WAVEGUIDE 153 - IEC*	154 - IEC	U	IAN G /U Aluminium	154 - IEC	U	JAN G /U Aluminium
R 14	PDR 14	417A	418A			
R 18	PDR 18					
R 22	PDR 22	435A	437A			
R 26	PDR 26	553	554			
R 32	UER 32 PDR 32 PAR 32 UAR 32	53	584	CAR 32	54A	585A
R 40	UER 40 PDR 40					
R 48	PAR 48 PDR 48 UAR 48 UER 48	149A	407	CAR 48	148C	406B
R 58	PAR 58 PDR 58 UAR 58 UER 58			CAR 58		
R 70	PAR 70 PDR 70 UAR 70 UER 70	344	441	CAR 70	343B	440B
R 84	PBR 84 PDR 84 UBR 84 UER 84	51	138	CBR 84	52B	137B
R 100	PBR 100 PDR 100 UBR 100 UER 100	39	135	CBR 100	40B	136B
R 120						
R 140	PBR 140 UBR 140	419		CBR 140	541A	
R 180						
R 220	PBR 220 UBR 220 PCR 220	595	597	CBR 220	596A	598A
R 260	PCR 260					
R 320	PBR 320 PCR 320 UBR 320	599		CBR 320	600A	
R 400	PCR 400	383				
R 500	PCR 500 PAR 500					
R 620	PCR 620 PFR 620	385				
R 740	PCR 740 PFR 740	387				
R 900	PCR 900 PFR 900					
R 1200	PCR1200 PFR 1200					

GENERAL OPERATIONAL RECOMMENDATIONS MAGNETRONS

1. GENERAL

1.1 General note

The following directions apply in general to all types of magnetrons. Any deviations for a particular type has been indicated in the relevant data.

1.2 Magnetron definition

A magnetron is a cylindrical high-vacuum diode with a cavity resonator system embedded in the anode. In the presence of suitable crossed electric and magnetic fields the magnetron can be used for the generation of continuous-wave and pulsed signals in the higher frequency bands. The energy available within the cathode/anode zone is coupled out and launched in a coaxial line or waveguide by means of the output probe or antenna.

The magnetron should not be regarded as an independent device, but rather as an integral part of the complete circuit. It follows that the operation of the equipment depends on the degree the various components are matched to each other.

1.3 Magnetrons for communications

In practice the communication magnetrons comprise the pulsed type of magnetrons used as radar transmitters either at a fixed frequency or tunable over a frequency range.

1.4 Magnetrons for microwave heating

Magnetrons for microwave heating are designed for c.w. operation at a frequency of either 2,450 GHz or 2,375 GHz.

1.5 General design considerations

Equipment should be designed around the tube specifications given in the data and not around one particular tube since, due to normal production variations, the electrical and mechanical design parameters may vary around the nominal values.

2. OPERATING CONDITIONS

2.1 Operating characteristics

The values published for these characteristics must be considered as the outcome of measurements on an average magnetron. Individual magnetrons may show a certain spread around the published values, whereas during life the values may be subject to variation.

In the published data the spread and variation during life have in many cases be accounted for by mentioning maximum and/or minimum values of the characteristics.

As the performance of a magnetron is greatly influenced by its load and by the characteristics of the power supply, it is strongly recommended that the magnetron be operated at the published operating conditions only. Whenever it is considered to operate the magnetron at conditions substantially different from those indicated, the tube manufacturer should be consulted.

2.2 Typical characteristics

The characteristics tabulated under this heading give general information on the magnetron independent of any specific kind of operation. The data should be regarded as pertaining to an average magnetron representative of the particular type. When necessary maximum and/or minimum values of the characteristics have been given to include the spread shown by individual samples and the variation which may occur during life.

2.3 Typical operation (recommended operation)

As the performance and lifetime of a magnetron are greatly influenced by the operating conditions (kind of anode supply, load, cooling, etc.), it is recommended that the magnetron be operated under the conditions "Typical Operation". Designers can consult the manufacturer whenever they consider it necessary to operate a certain tube under conditions different from those stated under "Typical Operation".

3. LIMITING VALUES

3.1 Rating system

The limiting values should be used in accordance with the 'Absolute maximum rating system' as defined by IEC publication 134.

3.2 Absolute maximum rating system

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, which should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment component variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

3.3 Anode voltage, positive and negative

In some cases (e.g. when the filament is not energized) the anode voltage across the tube may be higher than the nominal operating condition, due to the type of power supply employed. The maximum voltage is specified for individual tubes. It is recommended that a suitable spark gap be connected between the filament connectors and the anode (earth) to prevent this maximum rating being exceeded.

4. CATHODE

4.1 A cathode temperature either too high or too low may lead to unsatisfactory operation such as moding and arcing, involving short life and loss of efficiency. During operation the heater voltage should, therefore, be set as near as possible at the prescribed value. Temporary fluctuations should not exceed the tolerances mentioned in the published data of the individual types. The heater voltage should be measured directly on the terminals of the tube.

4.2 Types of cathode

There are two types of cathode in use and each individual tube data specifies which cathode it uses.

(a) Indirectly heated cathode

A cathode heated by an element, the heater.

A special construction is the *dispenser cathode*, which is not coated but continuously supplied with suitable emission material from a separate element associated with it.

(b) Directly heated cathode, or filamentary cathode.

A hot cathode usually in the form of a thoriated tungsten wire which is heated by current flowing in it.

4.3 Heater supply

The heater should be operated from a.c. (50 Hz or 60 Hz); d.c. may be used when specified in the data of a particular type.

4.4 Heater transformer

It is usual that the magnetron will be operated with the anode at earth potential. Therefore, the heater will be at high potential with respect to earth. Care must be taken to ensure that the secondary winding of this transformer is sufficiently well insulated from the earth and the primary winding.

4.5 Heater/cathode connectors

The connectors specified in the individual data have been designed to give the required electrical and mechanical contact and should be used with the specified magnetron.

The heater voltage should be measured on these connectors.

A coating of high temperature resistant silicone grease is recommended to prevent oxidation. The electrical conductors to the heater/cathode connectors should be flexible to eliminate undue stress on their respective terminals.

4.6 Heater voltage, starting

This is the voltage that should be applied to the heater when the tube is switched on from cold and before the anode voltage is applied.

4.7 Waiting time, or HT delay time

This is the minimum time which must elapse after the heater starting voltage is switched on and before the anode voltage is applied. This is to enable the cathode to reach the operating temperature.

4.8 Heater voltage, operating

This is the voltage at which the heater should be set immediately after applying the anode voltage. For some types information is given of the heater operating voltage related to the mean anode current.

4.9 Heater current

The heater current mentioned in the data is the nominal (typical) value measured when only the starting voltage is applied to the tube and when (thermal) equilibrum is reached. In addition the maximum value of the heater current at the starting voltage is given to assist in transformer design.

4.10 Heater current, peak starting

During switch-on when the heater starting voltage is applied, the peak current through the heater shall not exceed (at any time) the specified value under any condition of supply voltage waveform. In order to assist in the design of the heater transformer, information is also given in the individual data about the cold filament resistance at room temperature.

4.11 Precautions

Filtering of r.f. interference

There are national and international regulations concerning r.f. interference emanating from equipment. Filtering of this interference by capacitive and inductive components associated with the heater connections may be necessary. For tubes having no integral filter these components can influence the proper operation of the magnetron and the tube manufacturer should be consulted for advice and approval.

Fluctuations in supply voltage

Care should be taken to ensure that fluctuations in the supply voltage to the heater do not exceed the published tolerances for the particular type since too high or too low cathode operating temperatures can result in unsatisfactory magnetron operation e.g. moding, arcing, short life, etc.

5. ANODE POWER SUPPLY AND MODULATORS

5.1 General

The dynamic impedance of magnetrons is in general low; thus small variations in the applied voltage can cause appreciable changes in operating current. In the equipment design it is necessary to ensure that such variations in operating current do not lead to operation outside the published limits.

Current changes result in variation of power, frequency and frequency spectrum quality and consequent deterioration of equipment performance. This factor should determine the maximum current change inherent in the equipment design under the worst operating conditions.

For some magnetrons, a special type of power supply is published which is recommended for that tube. Design information of these power supplies may be obtained from the tube manufacturer.

5.2 Pulse type magnetrons

5.2.1 General

To ensure a constant operating condition with a pulsed magnetron the modulator design must provide a pulse, the amplitude of which does not vary to any significant extent from pulse to pulse. Moreover, the energy per pulse delivered to the magnetron, if arcing occurs, should not considerably exceed the normal energy per pulse. Further design precautions depend on the type of modulator employed, and cannot be generalized.

The performance of a magnetron is often a sensitive function of the shape of the voltage pulse that it receives and it is necessary to control four distinct aspects: rate of rise, spike, flatness and rate of fall. In this connection it is important that any observation of the shape of the pulse, either of voltage or of current, supplied by the modulator should be made with a magnetron load and not with a dummy load, because a magnetron acts as a non-linear impedance. Furthermore, a magnetron is likely to be sensitive to a mismatched load.

5.2.2 Rate of rise of voltage

Both maximum and minimum rate of rise of voltage (and sometimes of current) may be specified. The most critical value is that just before and during the initiation of oscillation. Too high or low a rate of rise may accentuate the tendency to moding.

Too high a rate of rise may cause operation in the wrong mode or even failure to oscillate, and either of these conditions may lead to arcing resulting in overheating or to excessive voltages.

Operation at too low a rate of rise of voltage may also cause oscillation in the wrong mode or oscillation in the normal mode at less than full current for an appreciable period and this will cause frequency pushing leading to a broad frequency spectrum.

Generally the rate of rise of voltage between the 20% and 80% points of the peak voltage is nearly linear and provides a good impression of the rate of rise at the onset of oscillation. In other cases, however, it may be necessary to measure the rate of rise above the 80% point.

For accuracy it is advisable to measure the rate of rise by means of a differentiating circuit or an oscilloscope. The total capacitance of the removable measuring device should be small with respect to the total stray capacitance of the modulator output circuit and in most cases not exceed 6 pF.

5.2.3 Spike

It is important that the voltage pulse should not have a high spike on the leading edge. Such a spike may cause the magnetron to start in an undesired mode. Although this operation may not be sustained, the transient condition may lead to destructive arcing. Measures taken to reduce the spike must not also reduce the rate of rise below the specified minimum.

5.2.4 Flat

The top of the voltage pulse should be free from ripple or droop since small changes in voltage cause large current variations resulting in frequency pushing. This leads to frequency modulation of the r.f. pulse and consequent broadening of the spectrum or instability.

5.2.5 Rate of fall

The fall of voltage must be rapid at least to the point where oscillation ceases, to avoid appreciable periods of operation below full current, with the attendent frequency pushing. This point is normally reached when the voltage has fallen to about 80% of the peak value.

Beyond this point a lower rate of fall is generally permissible, but a significant amount of noise will be generated, which may be detrimental to radar systems with a very short minimum range. To prevent noise being generated especially in short-wave radars the voltage tail must decay to zero before the radar receiver recovers.

A fast rate of fall is also important where a magnetron is operated at a high pulse repetition frequency since any diode current which occurs after oscillations have ceased will add appreciably to the mean current and dissipation of the tube.

In certain applications it is desirable to return the cathode to a positive d.c. bias in order to speed up the rate of fall and to prevent diode current being passed during the inter-pulse period.

5.3 C.W. type magnetrons

5.3.1 General

For c.w. types the amount of smoothing required in the h.t. supply depends on the amount of modulation, resulting from operating current variation, that can be tolerated.

5.3.2 Power supplies

General information on power supply design and possibly component design, e.g. transformer design, capacitor, etc. may be supplied by the tube manufacturer. The following power supply types are in use for different tubes:

- (a) unfiltered three-phase
- (b) single-phase full-wave rectification
- (c) unfiltered three-phase half-wave rectification
- (d) unfiltered three-phase full-wave rectification
- (e) LC stabilized
- (f) half-wave doubler, LC stabilized.

6 MICROWAVE PERFORMANCE

6.1 General

The magnetron oscillates in the specified frequency range and the power is coupled out from the anode zone into a waveguide or coaxial line by means of the output probe or antenna. The coupling of the transmission line to the cavity in which the material is being treated has to be carefully designed to ensure that the magnetron operates correctly.

6.2 Load or Rieke diagram

In general the published data include a load diagram, a circle diagram in which, for fixed input conditions, the output power and the frequency change of the magnetron are plotted against the magnitude and the phase (varied over 180 electrical degrees) of the voltage standing-wave ratio representing the load as seen by the magnetron.

In some cases the magnitude of the voltage standing-wave ratio (VSWR) has been replaced by the magnitude of the reflection coefficient (γ) these magnitudes being related by the formulae:

$$VSWR = \frac{1+\gamma}{1-\gamma} \qquad \qquad \gamma = \frac{VSWR - 1}{VSWR + 1}$$

The load diagram provides information on the behaviour of the magnetron to load conditions.

With a load of bad mismatch and at a particular phase there is a region on the load diagram which is characterized by high power output and convergence of the frequency contours. This region is known as "the sink" and the phase of the load at which the magnetron behaves in this manner is known as "the phase of sink". It is recommended that a tube be operated in the direction of sink. A tube should not be operated in the direction of anti-sink.

6.3 Reference plane

This is the plane from which measurements on microwave phase of the VSWR are made. The reference plane corresponds with the zero λ line in the load diagram. The distance d of an operating point in the diagram gives the position of the minimum of the VSWR with respect to the reference plane. This distance is specified in terms of guide wavelength.

6.4 Voltage standing-wave ratio (VSWR)

6.4.1 VSWR for pulse magnetrons

The anode current range shown in the individual data is related to a VSWR of maximum 1,5 as seen by the magnetron. Operation of the magnetron with a VSWR in excess of 1,5 is not recommended as this may reduce the current range for stable operation and can cause arcing and moding. A ratio near unity will benefit tube life and reliability.

When the length of the transmission line between the magnetron and the load is large compared with the wavelength the maximum permissible value of the VSWR may be reduced due to the occurrence of so-called long line effects. When a long transmission line can not be avoided a load isolator must be inserted between the magnetron and the line.

6.4.2. VSWR for c.w. magnetrons

Under typical operating conditions the tube is operated under specified VSWR and phase conditions. It is most unlikely that these VSWR and phase conditions will be constant and therefore there are two types of VSWR conditions:

- (a) Maximum continuous voltage standing-wave ratio
 This value shall not be exceeded under any conditions of loading, except those specified in para. 6.4.2.(b). The value for certain equipment may be measured with standard cold measuring techniques (perhaps using a specified measuring probe). In some instances this VSWR value may be limited to particular phase regions of operation and outside these regions a lower VSWR value may be specified. This value shall not be exceeded. Incorrect loading of the tube may cause unstable operation.
- (b) Instantaneous maximum voltage standing-wave ratio

 Some equipments use a device for varying the field pattern to produce a more uniform energy distribution in the applicator. This introduces instantaneous VSWR conditions which may exceed the continuous value. With those tubes where it is permissible to exceed the continuous value, the instantaneous value may be up to the specified value for a time of 0,02 s and maximum 20% of the time. It must be foolowed by a period four times as long during which the VSWR is less than the continuous maximum value.

 Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the r.f. loading conditions such as VSWR, phase of reflection and coupling section. It also depends on peak anode current, mean anode current waveform. See para. 7.2.5.

6.5 Fixed relfection elements

Fixed reflection elements are used to alter the operating position of a magnetron concerning magnitude of VSWR and phase. It may be that an equipment is set up for optimum operation at matched load. A fixed reflection element can alter the operating position to the more efficient position of the phase of sink.

6.6 Microwave accessories

6.6.1 Antenna

In some cases the tube manufacturer can supply data on antennae which can be attached to the output of the tube in order to facilitate coupling into a specific waveguide type. In addition, drawings may be available on specific waveguide coupling assemblies.

6.6.2 R.F. gasket or soft copper washer

Gaskets and washers are provided to ensure adequate and proper electrical and r.f. contact between the tube output structure and the coupling section. When a new tube is installed in an equipment new gaskets and washers must be installed at the same time.

6.6.2 Microwave coupling or launching section

In some instances the coupling section for a certain tube is published. It is recommended that that coupling section be used with that tube. In other cases no specific publication of coupling section is given and the tube manufacturer should be consulted, since drawings of a particular coupling section for a particular waveguide may be available. In some instances a transition to approximately $53.4~\Omega$ coaxial line is published.

7 MEASUREMENTS

7.1 Cold measurements

Cold measurements are carried out to determine the VSWR and phase offered to the magnetron. These measurements should already have been carried out during the development of the applicator.

A measuring probe is available for those magnetrons having an antenna output. This probe replaces the tube in cold measurements. For tubes with a coaxial output structure VSWR measurements can be done with available standard equipment.

The coaxial input of either the measuring probe or applicator can be directly connected to a network analyser to observe VSWR and phase. The reference plane for the load diagram is fixed to the input of the measuring probe or to the coaxial output structure of the tube (see drawings in the respective data publications). Design information for a network analyser for the microwave-heating band is available from the tube manufacturer.

7.2 Hot measurements

Hot measurements are carried out during development, production and servicing of microwave equipment.

7.2.1 Power output in a load

An output power measurement can be made using a defined quantity of water which is heated during a defined time. This check can also be done during production line control and servicing. The power into a cavity is given by the following equation:

$$P_0 = q \frac{\Delta T}{14.4} W$$

in which q is the quantity of water being heated (cm 3) and ΔT is the temperature rise per minute of the water (K).

7.2.2 Peak heater current

This value must be checked. A suggested method is shown in the following diagram.





Fig. 1.

7.2.3 Heater voltage

The heater voltage — both starting and stand-by — shall be checked under all possible conditions of mains voltage fluctuations. The values shall remain within the published limits.

7.2.4 Anode current/anode voltage



The circuit shown above enables the peak anode current I_a , the peak anode voltage V_a and the V_a to I_a characteristic to be displayed on an oscilloscope. The waveforms show whether the

peak values are in accordance with the published data and whether under certain load conditions, the magnetron can mode.

In addition the X-input signal can be read on a moving-coil voltmeter and calibrated in mean current.

For measurement of peak anode voltage the following circuit is recommended.




Fig. 3 For 50 Hz operation the RC time is fixed to 1 s.

7.2.5 Va to la characteristic

Excessive VSWR and/or current values may lead to moding of the magnetron which can be detected by displaying the V_a to I_a characteristic on an oscilloscope for the various load conditions. This should be part of production line inspection but should also be checked during field inspection and after tube replacement. The normal V_a to I_a characteristic should be similar to the normal magnetron characteristic as drawn below. The appearance of a second line or parts thereof distinctly above the first line indicates undesired modes of oscillation that can rapidly lead to failure of the tube.




Fig. 4 X-Y display of magnetron characteristic (unfiltered supply).

In such cases the operating conditions, including the VSWR, must be checked and the tube replaced if, under correct operating conditions, moding still occurs.

7.2.6 Seal temperature

The temperature of the specified points shall not exceed the published ratings. If the flow of coolant is reduced or blocked, the thermoswitch must switch off the equipment before the maximum seal temperature is reached.

7.2.7 Stray magnetic fields

During development, the proximity of other magnetic materials should be checked concerning the influence on the magnetic field of the operating magnetron. This can be detected with the circuit for peak anode voltage (see 7.2.4).

7.2.8 Stray microwave leakage

During development, production and servicing care should be taken to ensure that the microwave leakage from the equipment is below the standards for particular countries concerned. Generally this is a cavity design problem but sometimes energy can leak from the r.f. couplings associated with the tube.

8 HANDLING AND MOUNTING

8.1 General

The magnetron is a delicate electronic tube and has parts made of glass and/or ceramic. Care must be taken in handling, installation, carriage (transport), storage, etc.

8.2 Handling and storage

The original packing should be used for transporting and storing the tube. Shipment of the tube mounted in equipment is not permitted unless specifically authorized by the tube manufacturer.

The strong magnetic field necessary for the operation of the tube must not be weakened permanently. Therefore the tube should NEVER be placed directly on any piece of ferromagnetic material (steel shelfs, etc.). When the tubes have to be unpacked, e.g. at an assembly line or for measuring purposes, care should be taken that the tubes are not placed closer to each other than they would be placed when still packed. The storage area may be at normal room temperature and average humidity. Since the heater/filament is sensitive to shocks and vibration, care should be taken when handling and storing tubes such that shocks and vibrations are avoided. The best protection for the tube is the original pack.

8.3 Mounting position

There is a specified mounting position in the individual data. This mounting position normally refers to a certain axis. The specified axis is usually quoted on the outline drawing of the relevant magnetron.

8.4 Fixing or holding points

The fixing/holding/supporting points are generally specified on the outline drawing. The r.f. output coupling of the tube should not be used as the only means of supporting the tube. Adjustment should be available in the supporting brackets in the three directions of freedom to allow for manufacturing tolerances.

8.5 Electrical connections

The individual electrode connections to the tube should be flexible. Special places for the anode (earth) connection are indicated. These places are unpainted and therefore direct earth connections. Other places might not be electrically satisfactory.

8.6 Proximity of other magnets or ferromagnetic materials

The influence of other magnets or ferromagnetic materials on the magnetron magnetic field can result in degraded performance of the tube. Therefore magnets and stray magnetic field generators, either constant or varying, e.g. transformer cores, should be kept away at the specified distance from the magnetron in question.

8.7 Tools and instruments

All tools such as screwdrivers, wrenches, etc. used close to or in contact with the magnetron should be made of non-magnetic materials such as beryllium copper, brass or plastics to avoid unwanted attraction and possible mechanical damage to glass or ceramic parts as well as short-circuiting of the magnetic flux. Sensitive instruments may be influenced or damaged by being positioned too close to the magnetron.

GENERAL

8.8 General precautions

The tube, and particularly the r.f. output coupling, should be kept clean and should be inspected before installation. Any foreign matter, especially metal particles inside the coaxial line and dirt on the ceramic insulation may cause electrical breakdown during operation.

The magnetron should never be held by the cathode radiator because this might result in mechanical damage to the tube. When a magnetron is removed from service every effort should be made to put it back into its original packing.

8.9 Tube cleanliness

The ceramic parts of the input and output structures of the tube must be kept clean during operation. A protective cover of suitable material should be placed over the tube output if the output if the tube is inserted directly into a microwave cavity.

June 1980

9 COOLING

9.1 General

In general, cooling of the filament terminals, anode block and output is necessary and individual data specify the extent to which cooling by air, forced air or water is required. Overheating of the tube due to insufficient cooling may damage the tube. The coupling requirements stated in the individual data refer to magnetrons operated under open bench conditions. In order to keep within the limiting temperatures for anode block, cathode terminal assembly and output seal, where appropriate, it may be necessary in the practical equipment to provide additional coolant on account of high environmental temperatures due to restrictions imposed by the cabinet and to high ambient temperatures at the equipment location.

The residual heat of the cathode on switch-off may raise the seal temperature above its permitted maximum. This danger can be avoided either by continuing the air flow after removal of cathode heater power or by using sufficient air during operation to keep the temperature of the cathode so low that the rise in seal temperature on switch-off can be accommodated.

9.2 Air cooling

Forced air cooling, when required, shall be in accordance with the information given under typical cooling air requirements. In addition a cooling air diagram (if available) indicates the variation of temperature at a certain point and the air pressure drop as a function of air flow rate. It is recommended that the cooling air temperature at the entrance to the tube cooling radiator does not exceed 40 °C. Care should be taken that air filters do not become blocked so that the flow rate is inhibited and the cooling air is heated to a too high temperature by surrounding dissipative components such as mains high-voltage transformer. It is important that the air should not contain dust, moisture and oil. If an air filter is incorporated in the system, allowance must be made for the pressure drop across the filter and ducting when choosing a blower.

9.3 Water cooling

Water cooling in accordance with the specified flow rate should be supplied to the tube. The cooling diagram specifies the inlet water temperature and pressure drop as a function of water flow rate. Closed or open water circuits may be used and the minimum water inlet temperature is 4 °C. Re-circulating systems are preferred, since, apart from saving water, they help to ensure a high standard of purity.

Some of the requirements for satisfactory cooling water are that it should not be corrosive or deposit scale, should not contain insoluble material that might cause blockages and should have a high electrical resistance to prevent electrolysis. Its mineral content and electrical conductivity should therefore be periodically checked, especially when it is not drawn from a circulating system. A non-corrosive water should be low in chlorides, oxygen and carbon dioxide.

Scale formation may be avoided by maintaining a low amount of silica and bicarbonates, especially calcium bicarbonate. The total carbonate hardness should not exceed a value of 6° dH. No exact figures can be given for impurities as they are interdependent. However, in a circulating system the water should be as free as possible from all solid matter, and the dissolved oxygen content should be low. Whenever possible a closed water system using destilled or demineralized water should be employed. In this case the following should be added:

- 700 mg of a 24% solution hydrazin hydrate (approx. 0,7 ml per litre of water) to avoid corrosion.
- Approximately 700 mg sodium silicate per litre of water to increase the pH value (hydrogen ion concentration).

The additives will reduce the electrical conductivity of the water to below 300 $\mu\Omega^{-1}$ cm⁻¹ (resistivity > 3,3 k Ω per cm³) and also increase the pH value. A pH value of 7 to 9 is recommended). It is also recommended that the quality of the cooling water be checked after starting operations, and at regular intervals thereafter.

The cooling water must also be free from all traces of greasy substances since a small amount may form a dangerous heat barrier on the anode cooler, causing excessive anode temperature despite an apparently adequate water flow. These greasy or oily films may be removed by repeated flushing of the cooling channels with a domestic liquid detergent or slight soapy water to which a small quantity of industrial alcohol and 33% ammonia has been added (approx. 10 cc/l of each). The cleaning process should be completed by repeated flushing with demineralized water. The cause of such greasy deposits will usually be found elsewhere in the cooling system as the result of, for example, leaky pump glands. After the necessary repairs have been carried out, the whole system must be cleaned in a similar manner to prevent deposits forming again. The cooling water system must be interlocked with all electrical supplies to the tube. As an added safeguard, the interlocks should be activated if the water outlet temperature exceeds the indicated upper limit. To prevent the tube from running dry in the event of minor leakages in the system, the reservoir should always be above the level of the tube.

9.4 Thermoswitches

A thermoswitch must be used with each magnetron to protect the tube from overheating as a result of failure of the cooling system. The thermoswitch is normally 'closed' and opens when the temperature at the particular reference point exceeds the specified limit. The thermoswitch controls the power supply via a protection circuit and switches it off in the event of overheating.

A thermoswitch must be chosen which opens at the particular specified temperature when mounted at the specified place. In specifying the operating (opening) temperature, the temperature drop across the thermoswitch holder should be taken into account with respect to the temperature limit; under typical conditions this is about 5 K. Details of suggested thermoswitches can be supplied on request.

9.5 Temperature limits

Temperature reference points and maximum temperature limits are specified in the data. Under no circumstances shall these limits be exceeded. As for the limiting temperatures, measurements should be made in the development stage of the equipment, using suitable measuring methods.

9.6 Cooling during stand-by

Some forced-air or water cooling may be necessary during stand-by or starting filament heater voltage operation only. Tests should be carried out during the development of the equipment to ensure that sufficient cooling, even under extreme conditions, is available to keep the temperature of specified places below the maximum limit.

10 ACCESSORIES

10.1 General

The accessories recommended for use with relevant magnetrons should be used whenever possible. If an equipment maker considers it necessary to use other accessories he should ask the opinion of the tube manufacturer.

10.2 Fixed reflection elements

Fixed reflection elements are designed to adapt the operating position (in phase and VSWR) of the magnetron to a better position in the Rieke diagram (load diagram) to obtain more useful results, particularly with respect to power output. These accessories are not supplied by the tube manufacturer but drawings are given to facilitate manufacture if the use of these fixed reflection elements is recommended.

10.3 Gaskets and washers

Gaskets and washers are provided to ensure adequate and proper electrical and r.f. contact between the elements concerned. Generally, when a tube is installed, or re-installed, new gaskets and washers must be used.

10.4 Measuring probe

When available, the measuring probe should be used in place of the tube in development, production and servicing to ensure that the correct microwave impedance (phase and VSWR) is presented to the tube. See 7.1.

RATING SYSTEM


(in accordance with IEC Publication 134)

ABSOLUTE MAXIMUM RATING SYSTEM

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, which should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply variation, equipment component variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.



CONTINUOUS-WAVE MAGNETRON

Continuous-wave water-cooled packaged magnetron intended for microwave heating applications.

QUICK REFERENCE DATA

f	2,425 to 2,475 GHz
Wo	2,0 to 2,5 kW
packaged	
	d single-phase full-wave, or ase half-wave rectification
	packaged unfiltered

CATHODE: Dispenser type

HEATING: Indirect by a.c. (50 to 60 Hz) or d.c. See also page C7.

Heater voltage, starting	V_{f}		5	v + 5% -10%
Heater voltage, stand-by	V_{f}		4,8	v + 5% -10%
Heater current at V _f = 5 V	If	≈ <	35 38	
Heater current, peak starting	Ifp	max.	100	A
Cold heater resistance	Rfo	≈	20	$m\Omega$
Waiting time (time before application of high voltage at $V_f = 5 \text{ V}$	t_{W}	min.	120	s

TYPICAL CHARACTERISTICS measured under matched load conditions (VSWR \leq 1,05) and a d.c. power supply

Frequency, fixed within the band f 2,425 to 2,475 MHz Anode voltage at I $_{\rm a}$ = 750 mA V $_{\rm a}$ 4,45 to 4,85 kV

LIMITING VALUES AND OPERATING CHARACTERISTICS

Anode voltage obtained from a single-phase full-wave, or three-phase half-wave, rectifier without smoothing filter.

A. OPERATION WITH Wo = 2 kW

LIMITING VALUES (Absolute maximum rating system)

Anode current, mean	Ia	max. min.	0,8 A 0,1 A
Anode current, peak	lap	max.	2,1 A
Voltage standing-wave ratio at 0,37 λ $<$ d $<$ 0,44 λ	VSWR	max.	4
remaining region	VSWR	max.	5

TYPICAL OPERATION (into a matched	load	hed I	matched	а	(into	TION	RA	OPE	PICAL	7
-----------------------------------	------	-------	---------	---	-------	------	----	-----	-------	---

Heater voltage, running	V_{f}	2	V	
Anode current, mean	la	0,75	Α	
Anode current, peak	Ia	2	A	
Anode voltage (measured with d.c.)	Va	4,75	kV	
Output power	W _o >	2 1,85	kW kW	
Efficiency	n	55	%	

B. OPERATION WITH Wo = 2,5 kW

A fixed reflection element with a VSWR of 1,5 and a phase position of 0,41 λ should be inserted between magnetron and load.

LIMITING VALUES (Absolute maximum rating system)

Anode current	la	max. min.	0,9		
Anode current, peak	lap	max.	2,1	Α	
Voltage standing-wave ratio at 0,37 $\lambda < d <$ 0,44 λ remaining region	VSWR VSWR	max.	2,5 4		
TYPICAL OPERATION (into a matched load) *					
Heater voltage, running	V_f		1,5	V	
Anode current, mean	la		0,85	Α	
Anode current, peak	lap		2	Α	
Anode voltage (measured with d.c.)	Va		4,8	kV	
Output power	Wo	>	2,5 2,3		
Efficiency	η	≈	60	%	

C. OPERATION WITH $W_0 = 2.5 \text{ kW FOR MICROWAVE OVENS}$

The average VSWR should be 3 at $d = 0.41 \lambda$.

LIMITING VALUES (Absolute maximum rating system)

Anode current, mean	Ia	max. min.	0,85		
Anode current, peak	lap	max.	2,1	Α	
Voltage standing-wave ratio at 0,3 $\lambda < d < 0.5 \; \lambda$	VSWR	max.	4		
intermittent (t = max. 0.02 s and max. 20% of the time) remaining region	VSWR VSWR	max.	10 4	**	

^{*} With respect to reference plane B of fixed reflection element.

^{**} The average reflected power for any one-second period must not exceed the reflected power equivalent to a VSWR of 4. When operating under these conditions, the tube should not be permitted to mode.

60 %

TYPICAL	OPER	AIION

Heater voltage, running	Vf	1,8 V
Anode current, mean	la	0,8 A
Anode current, peak	lap	2 A
Anode voltage	Va	4,95 kV
Voltage standing-wave ratio at 0,3 λ < d < 0,5 λ	VSWR	3
Output power	W _o >	2,5 kW 2,3 kW

Efficiency

Anode block water

Required quantity of water see cooling curve

Cathode radiator, via air duct low-velocity air flow > 0,2 m³/min

TEMPERATURE LIMITS (Absolute maximum rating system)

Anode temperature at reference point for temperature measurement T_a max. 125 °C Cathode radiator temperature T_a max. 180 °C

To safeguard the magnetron from overheating if the cooling fails, provision is made for mounting a thermoswitch. This switch should become operative at a temperature of 120 °C to 125 ° at the mounting plate.

MECHANICAL DATA

Net mass: $\approx 4.7 \text{ kg}$

Mounting position: any

ACCESSORIES

Cap nut	type	55312
Spring ring	type	55313
Heater connector	type	40634
Heater/cathode connector	type	40649

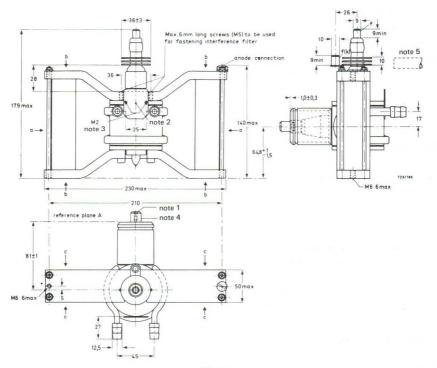


Fig. 1.

Notes

- 1. Axial hole for short antenna: M4, depth 9 mm minimum.
- 2. Reference point for temperature measurements.
- 3. Mounting holes for thermoswitch.
- 4. Eccentricity of inner conductor with respect to the outer conductor max. 0,4 mm.
- 5. Non-metallic air duct, inner diameter 13 mm.


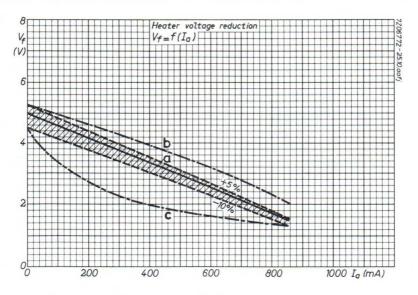


Fig. 2.

Immediately after applying the anode voltage the heater voltage must be reduced as a function of the anode current according to the diagram above. The life of the magnetron will be greatest if the heater voltage is reduced to a value given by the fully drawn line a. The heater voltage should be adjusted within +5 and -10% as given by the dashed lines which border the hatched area.


If the equipment has been designed for a predetermined number of steps of output power level, the reduced heater voltage for each step must be set to a value within the area bordered by the lines b and c, and preferably within or close to the hatched area. In no circumstances should the heater voltage reach a value outside the limits given by the curves b and c.

The limits $V_f = 5 \text{ V} - 10\%$ and $t_W = 120 \text{ s}$ should not be used simultaneously. With V_f below the nominal value, t_W should be increased in linear proportion up to min. 180 s at $V_f = 5 \text{ V} - 10\%$. It is also possible to preheat the tube at stand-by conditions if the waiting time is extended to at least 10 minutes.



7782682 Ti max (°C) 40 20 0 0 1 q (l/min) 2 Fig. 4.

Fig. 3.




Load diagram Operation A


Fig. 5 Mean anode current 0,75 A


Peak anode current 2 A

d = distance of standing wave
minimum from reference
plane A towards load

Temperature at reference
point 85 °C



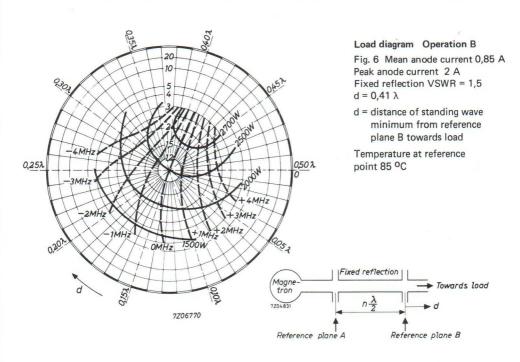

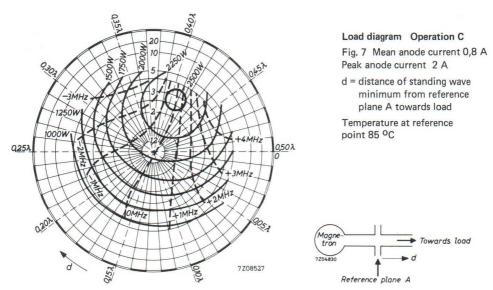

CONTINUOUS-WAVE MAGNETRON

Continuous-wave air-cooled packaged magnetron intended for microwave heating applications.

QUICK REFERENCE DATA

Frequency, fixed within the band 2,425 to 2,475 GHz Output power 2,0 to 2,5 kW Wo packaged Construction Anode supply unfiltered single-phase full-wave, or three-phase half-wave rectified

CATHODE

HEATING

TYPICAL CHARACTERISTICS

LIMITING VALUES AND OPERATING CONDITIONS

TEMPERATURE LIMITS

COOLING

Anode block

Required quantity of air

Cathode radiator, via air duct

See YJ1160

forced air see cooling curve low-velocity air flow $(>0.2 \text{ m}^3/\text{min})$

MECHANICAL DATA

Dimensions in mm

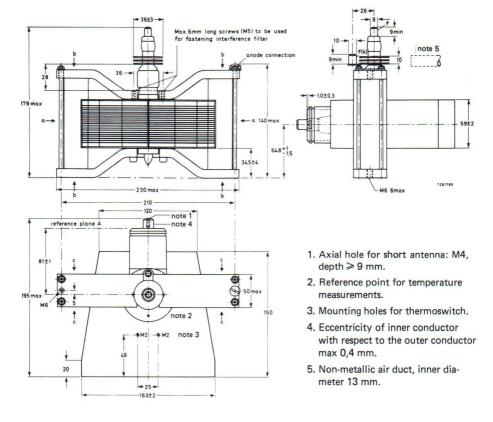


Fig. 1.

CONTINUOUS-WAVE MAGNETRON

QUICK REFERENCE DATA

Frequency, fixed within the band	f 2,430 to 2,47	0 GHz
Output power	Wo	6 kW
Construction	packaged, metal ceramic	
Cathode	quick heating	

The YJ1191 is equivalent to YJ1193 but has no filter box.

CONTINUOUS-WAVE MAGNETRONS

Packaged, water-cooled continuous-wave magnetron with integral r.f. filter and permanent magnets, intended for industrial microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 6 kW. Types YJ1193 and YJ1195 are only mechanically different.

QUICK REFERENCE DATA

Frequency, fixed within the band	f 2,430 to 2,470 GHz	
Output power	W _o 6 kW	
Construction	packaged, metal ceramic	
Cathode	quick heating	
Cooling	water and air	
R.F. filter	integral	

TYPICAL OPERATION

Con	 :4:	_	

Filament voltage, starting	V _f	5,5 V	
Waiting time	t _W	10 s	
Filament voltage, operating	Vf	1,0 V	
Anode supply	three-phase for	ull-wave rectifier	
Anode current, mean	la	1,25 A	
Anode current, peak	lap	1,5 A	
Load impedance Voltage standing-wave ratio Phase, in direction of load with	VSWR	1,5	
respect to reference plane	d	0,42 λ	
Cooling	see relevant paragraph		

Performance

Filament current at V _f = 1,0 V	If	5 A
Anode voltage, mean	V_a	7,3 kV
Output power	Wo	6 kW
	Wo	> 5,4 kW
Efficiency	η	65 %

For other load impedance and anode current conditions see pages 11 and 12 and "Design and operating notes".

CATHODE: thoriated tungsten

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.

With d.c. the filament terminal (f) must have positive polarity.

Filament voltage, starting and stand-by	Vf		5,5	V ± 109	2
operating at I _{a mean} = 1,25 A	V_{f}		1,0	V ± 109	3
Filament current at $V_f = 5.5 \text{ V}$; $I_a = 0$	If	<	44 48		
at $V_f = 1.0 \text{ V}; I_{a \text{ mean}} = 1.25 \text{ A}$	If		5	Α	
Filament starting current, peak	Ifp	max.	150	Α	
Cold filament resistance	R _{fo}		17	$m\Omega$	
Waiting time (time before application of high voltage)	t	min	10	c	

Immediately after applying the anode voltage the filament voltage must be reduced to the operating value.

If it is intended to design the equipment for a variable output power, either continuously adjustable or stepped, the filament voltage must be reduced as a function of the anode current (see graph below). The reduced filament voltage may be set to a value within the area bordered by the lines b and c, but for longest life it should be within the hatched area. In no circumstances should the filament voltage reach a value outside the limits given by the lines b and c.

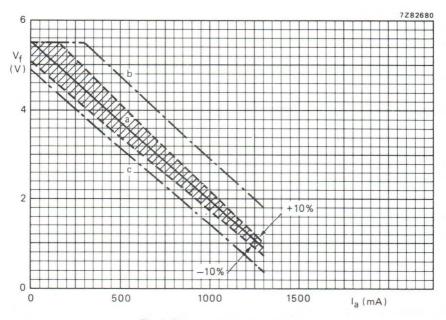


Fig. 1 Filament voltage reduction curve.

TYPICAL CHARACTERISTICS

Measured under matched load conditions (VSWR \leq 1,05) and three-phase full-wave rectified supply. (See "Design and operating notes".)

Frequency, fixed within the band	f	2,430 to	2,470	GHz
Anode voltage, mean	V_a		7,2	kV
Anode current, mean	la		1,25	Α
Output power	Wo		5,5	kW
LIMITING VALUES (Absolute maximum rating system)				
Anode current, mean	la	max.	1,3	A
Anode current, peak	lap	max.	1,7	Α
Anode input power	Wia	max.	9,6	kW
Temperature at reference point, closed cooling circuit open cooling circuit	T _a	max. max.		°C
Cooling water outlet temperature, closed cooling circuit open cooling circuit	T _o	max. max.		°C
Voltage standing-wave ratio	VSWR	max.	2,5	

COOLING

Anode block	water
Minimum required rate of flow and pressure drop	see Fig. 12
R.F. filter box	air
Required rate of flow at room temperature	q min. 60 ℓ/min.
Pressure drop	see Fig. 13
R.F. output system	air
Required rate of flow at room temperature	g min. 100 l/min.

With only the filament voltage applied some water and air cooling is required.

To safeguard the magnetron against overheating if the water cooling fails, provision is made for mounting a thermoswitch. This switch should operate at a mounting disc temperature of 70 °C for an open water cooling circuit and 85 °C for a closed system.

The r.f. output system of the magnetron is provided with air inlet and outlet holes for the application of at least 100 ℓ /min of cooling air to the ceramic part inside the outer conductor. For an example of a cooling device around the output system see "Output coupling". All inlet holes must be used for entrance of air to obtain the required uniform cooling. The cooling air must be filtered to be free from dust, water and oil.

ACCESSORIES

Cap nut for output coupling type 55312

Spring ring type 55313

Soft copper washer, supplied with tube type 55328

Cap nut type TE1051b

Hose nipple type TE1051c

Recommended isolator 2722 163 02004

Dimensions in mm

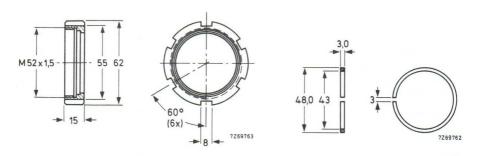


Fig. 2 Cap nut type 55312.

Fig. 3 Spring ring type 55313.




Fig. 4 Washer type 55328.




Fig. 5 Cap nut type TE1051b (thread 3/8 in gas).

Fig. 6 9 mm hose nipple type TE1051c.

DESIGN AND OPERATING NOTES

General

Whenever it is considered necessary to operate the magnetron at conditions substantially different from those indicated under "Typical operation" the tube manufacturer should be consulted.

The equipment should be designed around the tube specifications given in this data and not around one particular tube since, due to normal production variations, the electrical and mechanical parameters will vary around the nominal values.

Anode supply

The magnetron may be operated from a three-phase full-wave rectified supply unit. This unit should be so designed that no limiting value for the mean and peak anode currents is exceeded, whatever the operating conditions. The use of a current regulating and limiting device is recommended.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since in normal magnetron operation the anode is earthed and the cathode will be at high negative potential with respect to the anode.

The transformer should be so designed that the filament voltage and the peak filament starting current limits are not exceeded.

Load impedance

Optimum output power and life are obtained when the magnetron is loaded with an impedance giving a VSWR of approximately 1,5 in the phase of sink region. This phase condition is reached when the position of the voltage standing wave minimum is at a distance of about 0,42 λ from the reference plane for electrical measurements (see outline drawing) in the direction of the load.

When using the coaxial-to-R26 waveguide transition shown in Fig. 9 this condition is automatically reached, provided antenna type B is used. Antenna type A, together with the above transition, gives a VSWR of about 1 (matched). Detailed construction drawings available on request.

Tube cleanliness

The ceramic parts of the cathode and output structure of the tube must be kept clean during operation. The cooling air should be filtered to prevent deposits forming on the insulation.

STORAGE, HANDLING AND MOUNTING

Storage and handling

The original pack should be used for transporting and storing the tube. Shipment of the tube mounted in the equipment is only permitted if specifically authorized by the manufacturer.

When the tubes have to be unpacked, e.g. at an assembly line for measurement purposes, care should be taken that a minimum distance of 13 cm is maintained between the tubes. As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling unpacked tubes that undue shocks and vibrations are avoided. High intensity magnetic fields associated with transformers and other magnetic equipment can demagnetize the magnets. Such fields should not be present when the tube is stored or serviced. The best protection of the tube is its original pack.

The user should be aware of the strong magnetic fields around the magnet. When handling and mounting the magnetron, he must use non-magnetic tools and be extremely careful not to have precision instruments nearby.

Mounting

When magnetic materials are present in two or more planes, their minimum distance from the magnet shall be 13 cm in all directions.

All tools (screwdrivers, wrenches, etc.) used close to or in contact with the magnetron must be made of non-magnetic material to avoid unwanted attraction and possible mechanical damage to ceramic parts as well as short-circuit of the magnetic flux.

To prevent mechanical stresses and torques, the output coupling should not be used as the only means of mounting; an additional flexible support of the tube is necessary.

OUTPUT COUPLING

The output system of the magnetron must be coupled via a 16/39 coaxial line (characteristic impedance 53,4 Ω (see Fig. 7) to the load system.




Fig. 7 Output coupling.


The inner conductor should be able to accept the tolerances of the magnetron output system (see outline drawing) and thermal expansion.

The soft copper washer type 55328 shall be used between the inner conductor and the magnetron output system. A firm contact between antenna and inner conductor of tube must be assured.

When screwing the inner conductor into the magnetron output system the maximum permissible torque is 1.5 Nm.

Example of a cooling device for output system (not supplied by the manufacturer)

Material: non-magnetic



Pressure drop at 100 l/min:

about 600 Pa with air outlet via outlet holes;

about 300 Pa if air can also escape towards the load through coaxial line.

An example of the coupling of the tube via a coaxial to an R26 waveguide transition is shown in Fig. 9.


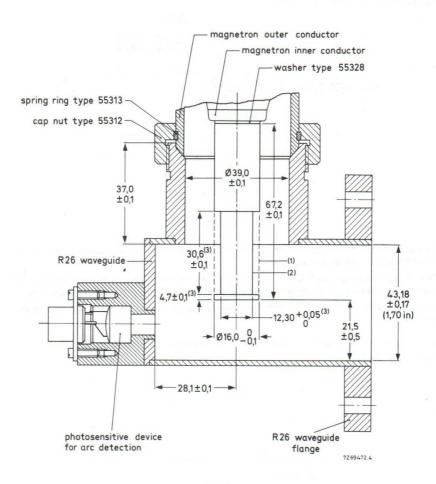


Fig. 9.

- (1) Antenna type A (cylindrical) for matched load.
- (2) Antenna type B, VSWR ≈ 1,5 in direction of sink for matched waveguide load.
- (3) These dimensions for antenna type B only.

MECHANICAL DATA YJ1193

Dimensions in mm

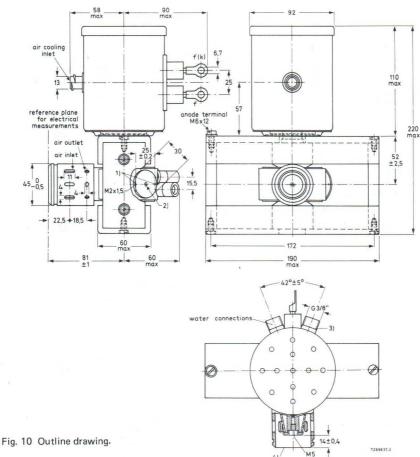

Mounting position: any


Net mass:

approx. 4,7 kg

- (1) Two M2 screws for mounting a thermoswitch are supplied with the magnetron.
- (2) Plate for mounting a thermoswitch; temperature reference point.
- (3) To be connected to hose nipple type TE1051c (DIN 44415) for 9 mm hose with cap nut type TE1051b (CR3/8 in DIN 8542 Ms).
- (4) Eccentricity of inner conductor with respect to outer conductor max. 0,4 mm.

MECHANICAL DATA YJ1195

Dimensions in mm

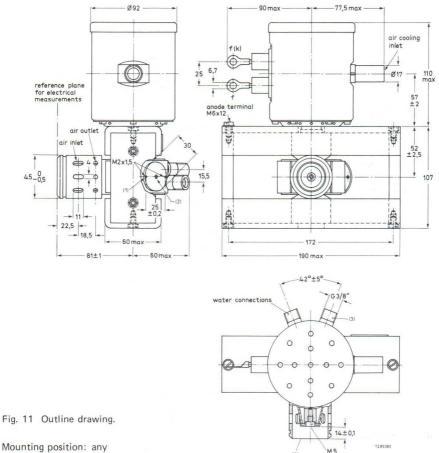

Net mass:

approx. 4,7 kg

- (1) Two M2 screws for mounting a thermoswitch are supplied with the magnetron.
- (2) Plate for mounting a thermoswitch; temperature reference point.
- To be connected to hose nipple type TE1051c (DIN44415) for 9 mm hose with cap nut type TE1051b (CR3/8 in DIN 8542 Ms).
- (4) Eccentricity of inner conductor with respect to outer conductor max. 0,4 mm.

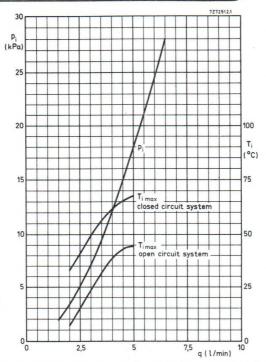


Fig. 12 Minimum required quantity of water q, and pressure drop p_i as a function of water inlet temperature T_i . Water supplied via hose nipple TE1051c. If additional information is required please contact the manufacturer.




Fig. 13 Pressure drop as a function of air flow through filter box.

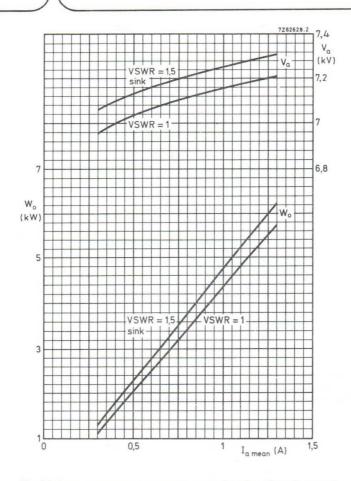


Fig. 14 Output power and anode voltage as a function of anode current.

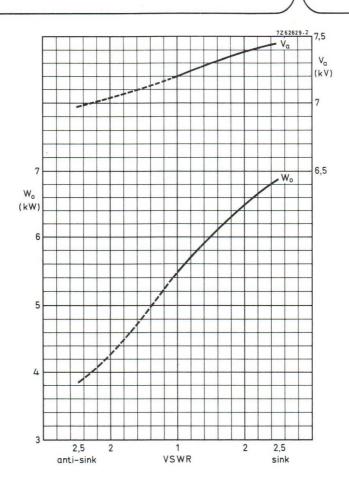


Fig. 15 Output power and anode voltage as a function of load impedance, $V_f = 1.0 \text{ V}$; $I_{a \text{ mean}} = 1.25 \text{ A}$.

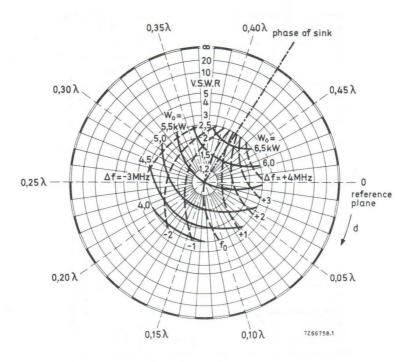


Fig. 16 Load diagram.

Anode supply three-phase full-wave rectified
Filament voltage 1 V
Anode current, mean 1,25 A
Anode current, peak 1,5 A

Constant cooling

d = distance of standing wave minimum from reference plane towards load

CONTINUOUS-WAVE MAGNETRONS

Packaged, water-cooled continuous-wave magnetron with integral r.f. filter intended for use with electromagnet in industrial microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power up to 6 kW. Types YJ1193E and YJ1195E are only mechanically different.

QUICK REFERENCE DATA

Frequency, fixed within the band	f 2,430 to 2,470 GHz
Output power	W _o 1 to 6 kW
Construction	packaged, metal ceramic
Cathode	quick heating
Cooling	water and air
R.F. filter	integral

Output power

Efficiency

TYPICAL OPERATION		
Conditions, for 6 kW output power		
Filament voltage, starting	v_f	5,5 V
Waiting time	t _w	10 s ◀
Filament voltage, operating	V_{f}	1,0 V
Anode supply	three phase full-	wave rectifier
Anode current, mean	l _a	1,25 A
Anode current, peak	lap	1,5 A
Load impedance Voltage standing-wave ratio Phase in direction of load with	VSWR	1,5
respect to reference plane	d	0,42 λ
Cooling	see relevant para	agraph
Performance		
Filament current at V _f = 1,0 V	If	5 A
Anode voltage, mean	Va	7,3 kV

For other load impedance and anode current conditions see pages 11 and 12 and "Design and operating notes".

Wo

 W_{o}

η

6 kW

> 5,4 kW 65 %

CATHODE: thoriated tungsten

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.

With d.c. the filament terminal (f) must have positive polarity.

Filament voltage, starting and stand-by operating at I _{a mean} = 1,25 A	V_{f}			V ± V ±	
Filament current at $V_f = 5.5 \text{ V}$; $I_a = 0$	If	<	44 48		
at V _f = 1,0 V; I _{a mean} = 1,25 A	· If		5	Α	
Filament starting current, peak	Ifp	max.	150	A	
Cold filament resistance	R _{fo}		17	$m\Omega$	
Waiting time (time before application of high voltage)	tw	min.	10	S	

Immediately after applying the anode voltage the filament voltage must be reduced to the operating

If it is intended to design the equipment for a variable output power, either continuously adjustable or stepped, the filament voltage must be reduced as a function of the output power (see graph below).

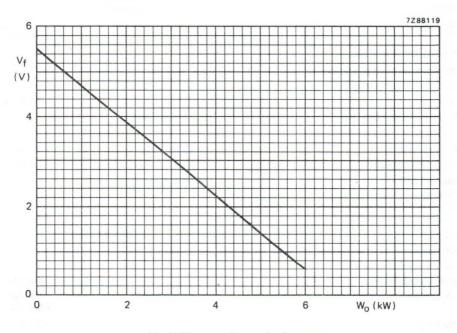


Fig. 1 Filament voltage reduction curve.

TYPICAL CHARACTERISTICS

Measured under matched load conditions (VSWR \leq 1,05) and three-phase full-wave rectified supply (See "Design and operating notes".)

Frequency, fixed within the band	f 2	2,430 to	2,470	GHz
Anode voltage, mean	Va		7,2	kV
Anode current, mean	la		1,25	Α
Output power	W_{o}		5,5	kW
LIMITING VALUES (Absolute maximum rating system)				
Anode current, mean	la	max.	1,3	Α
Anode current, peak	lap	max.	1,7	A
Anode input power	Wia	max.	9,6	kW
Temperature at reference point, closed cooling circuit open cooling circuit	T_{a} T_{a}	max.		°C
Cooling water outlet temperature, closed cooling circuit open cooling circuit	T _o T _o	max. max.		°C
Voltage standing-wave ratio	VSWR	max.	2,5	

COOLING

water		
see Fig.	12	
air		
q	min.	60 l/min.
see Fig.	13	
air		
q	min.	100 l/min.
	see Fig. air q see Fig. air	see Fig. 12 air q min. see Fig. 13 air

With only the filament voltage applied some water and air cooling is required.

To safeguard the magnetron against overheating if the water cooling fails, provision is made for mounting a thermoswitch. This switch should operate at a mounting disc temperature of 70 °C for an open water cooling circuit and 85 °C for a closed system.

The r.f. output system of the magnetron is provided with air inlet and outlet holes for the application of at least $100 \, \text{l/min}$ of cooling air to the ceramic part inside the outer conductor. For an example of a cooling device around the output system see "Output coupling". All inlet holes must be used for entrance of air to obtain the required uniform cooling. The cooling air must be filtered to be free from dust, water and oil.

ACCESSORIES

Cap nut for output coupling

Spring ring

Soft copper washer, supplied with tube

Cap nut

Hose nipple

Recommended isolator

type 55312 type 55313 type 55328 type TE1051b

type TE1051c 2722 163 02004

Dimensions in mm




Fig. 2 Cap nut type 55312.




Fig. 3 Spring ring type 55313.




Fig. 4 Washer type 55328.




Fig. 5 Cap nut type TE 1051b (thread 3/8 in gas).




Fig. 6 9 mm hose nipple type TE 1051c.

DESIGN AND OPERATING NOTES

General

The equipment should be designed around the tube specifications given in this data and not around one particular tube since, due to normal production variations, the electrical and mechanical parameters will vary around the nominal values.

Electromagnetic system

Details concerning the design of the electromagnetic system are available on request.

Anode supply

The magnetron may be operated from a three-phase full-wave rectified supply unit. This unit should be so designed that no limiting value for the mean and peak anode currents is exceeded, whatever the operating conditions. The use of a current regulating and limiting device is recommended.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since in normal magnetron operation the anode is earthed and the cathode will be at high negative potential with respect to the anode.

The transformer should be so designed that the filament voltage and the peak filament starting current limits are not exceeded.

Load impedance

Optimum output power and life are obtained when the magnetron is loaded with an impedance giving a VSWR of approximately 1,5 in the phase of sink region. This phase condition is reached when the position of the voltage standing wave minimum is at a distance of about 0,42 λ from the reference plane for electrical measurements (see outline drawing) in the direction of the load.

When using the coaxial-to-R26 waveguide transition shown in Fig. 9 this condition is automatically reached at matched load in the waveguide, provided antenna type B is used. Antenna type A, together with the above transition, gives a VSWR of about 1 (matched). Detailed construction drawings available on request.

Tube cleanness

The ceramic parts of the cathode and output structure of the tube must be kept clean during operation. The cooling air should be filtered to prevent deposits forming on the insulation.

STORAGE, HANDLING AND MOUNTING

Storage and handling

The original pack should be used for transporting and storing the tube. Shipment of the tube mounted in the equipment is only permitted if specifically authorized by the manufacturer.

As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling unpacked tubes that undue shocks and vibrations are avoided. The best protection of the tube is its original pack.

Mounting

To prevent mechanical stresses and torques, the output coupling should not be used as the only means of mounting; an additional flexible support of the tube is necessary.

OUTPUT COUPLING

The output system of the magnetron must be coupled via a 16/39 coaxial line (characteristic impedance 53,4 Ω (see Fig. 7)) to the load system.

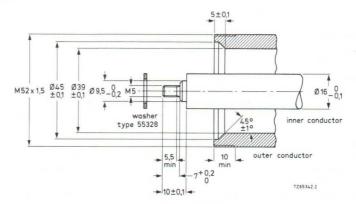


Fig. 7 Output coupling.

The inner conductor should be able to accept the tolerances of the magnetron output system (see outline drawing) and thermal expansion.

The soft copper washer type 55328 shall be used between the inner conductor and the magnetron output system. A firm contact between antenna and inner conductor of tube must be assured.

When screwing the inner conductor into the magnetron output system the maximum permissible torque is $1,5\,\mathrm{Nm}$.

Example of a cooling device for output system (not supplied by the manufacturer)

Material: non-magnetic.




Fig. 8 Cooling device.

Pressure drop at 100 l/min:

about 600 Pa with air outlet via outlet holes;

about 300 Pa if air can also escape towards the load through coaxial line.

An example of the coupling of the tube via a coaxial to an R26 waveguide transition is shown in Fig. 9.

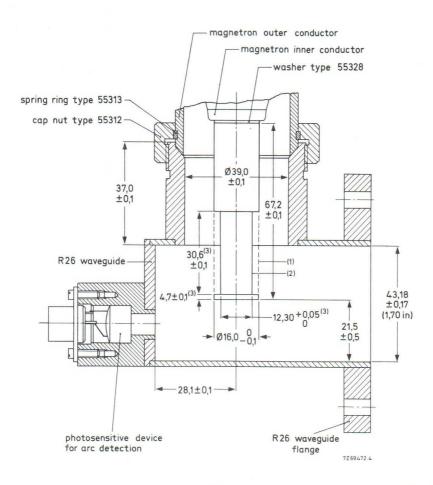
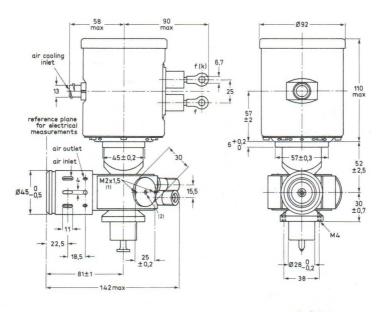


Fig. 9.

- (1) Antenna type A (cylindrical) for matched load.
- (2) Antenna type B, VSWR ≈ 1,5 in direction of sink for matched waveguide load.
- (3) These dimensions for antenna type B only.

MECHANICAL DATA YJ1193E

Dimensions in mm






Fig. 10 Outline drawing.

Mounting position: any


Net mass:

approx. 1,9 kg

- (1) Two M2 screws for mounting a thermoswitch are supplied with the magnetron.
- (2) Plate for mounting a thermoswitch; temperature reference point.
- (3) To be connected to hose nipple type TE1051c (DIN44415) for 9 mm hose with cap nu type TE1051b (CR3/8 in DIN8542 Ms).
- (4) Eccentricity of inner conductor with respect to outer conductor max. 0,4 mm.

MECHANICAL DATA YJ1195E

Dimensions in mm

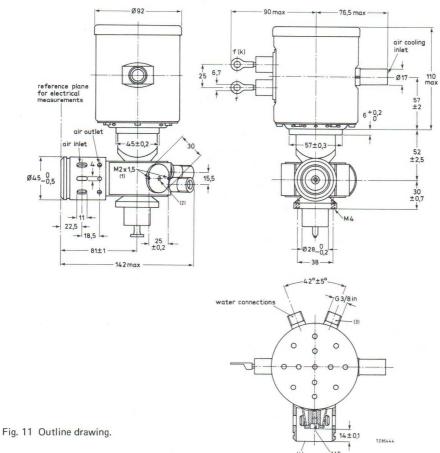

Mounting position: any

Net mass:

approx. 1,9 kg

- (1) Two M2 screws for mounting a thermoswitch are supplied with the magnetron.
- (2) Plate for mounting a thermoswitch; temperature reference point.
- (3) To be connected to hose nipple type TE1051c (DIN44415) for 9 mm hose with cap nut type TE1051b (CR3/8 in DIN8542 Ms).
- (4) Eccentricity of inner conductor with respect to outer conductor max. 0,4 mm.

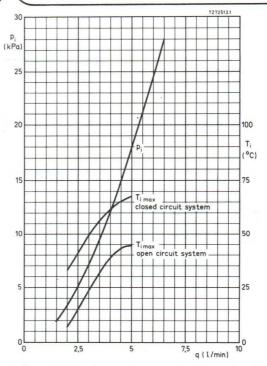


Fig. 12 Minimum required quantity of water q, and pressure drop p_i as a function of water inlet temperature T_i . Water supplied via hose nipple TE 1051c. If additional information is required please contact the manufacturer.




Fig. 13 Pressure drop as a function of air flow through filter box.

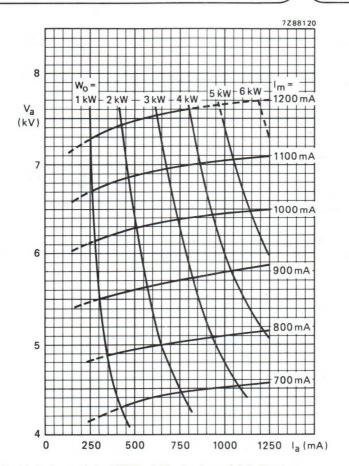


Fig. 14 Performance for VSWR = 1,5 in the phase of sink direction.

Output power and anode voltage as a function of anode current.

Anode voltage is a function of the electric current through the magnetic coils (I_m).

Measured with: Cooling constant; V_f adapted to the output power.

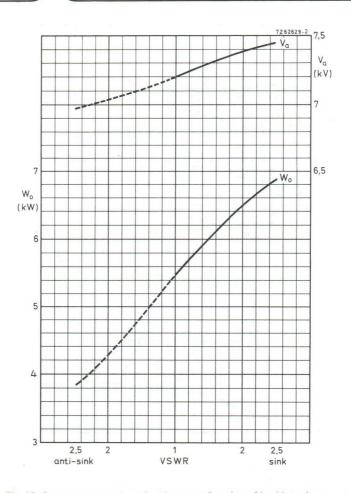


Fig. 15 Output power and anode voltage as a function of load impedance, V_f = 1,0 V; $I_{a\,mean}$ = 1,25 A.

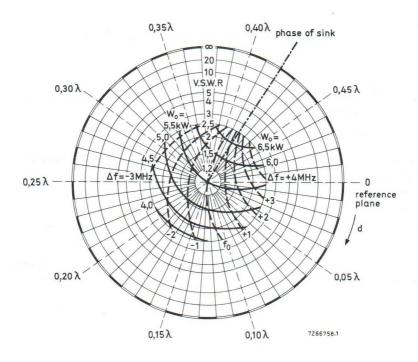


Fig. 16 Load diagram.

Anode supply

three-phase full-wave rectified

Filament voltage

1 V

Anode current, mean

1,25 A

Anode current, peak

1,5 A

Constant cooling

d = distance of standing wave minimum from reference plane towards load.

CONTINUOUS-WAVE MAGNETRON

Packaged, water-cooled continuous-wave magnetron with integral r.f. filter, intended for industrial microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 6 kW.

QUICK REFERENCE DATA

Frequency, fixed within the band	f 2,350 to 2,400 GHz
Output power	W _o 6 kW
Construction	packaged, metal-ceramic
Cathode	quick-heating
Cooling	water and air
R.F. filter	integral

The YJ1194 is equivalent to the YJ1193, except for the frequency band, being 2,350 to 2,400 GHz. Recommended isolator 2722 163 02024

CONTINUOUS-WAVE MAGNETRON

The YJ1280 is an integral magnet c.w. magnetron designed for use in microwave heating applications. With an LC stabilized power supply, it can produce up to 1,5 kW under typical operating conditions. The magnetron is air-cooled and is of a metal-ceramic construction.

QUICK REFERENCE DATA

	metal-ceramic, packaged			
Output power	W_{o}	1,5 kW		
Frequency, fixed within the band	f 2	2,425 to 2,475 GHz		

TYPICAL OPERATION					
Anode supply		L-C s	tabilize	ed	
Filament voltage, stand-by		V_{f}	5,0	V	
Filament voltage, operating		V_{f}	3,5	V	
Anode current, mean*		la	380	mA	
Anode current, peak		lap	650	mA	
Load imedance	VSWR		2,5		
	in direction of	f sink		matched	
Anode voltage*	Va	5,7		5,7	kV
Output power	Wo	1,5		1,3	kW
				min. 1,15	kW

For other load impedance and anode current conditions see Figs 3 and 10.

CATHODE: Thoriated tungsten

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.**					
Filament voltage, starting and stand-by	Vf		5,0	V ±	10%
Filament voltage, operating at I _a mean = 380 mA	V_{f}		3,5	V ±	10%
Filament current at $V_f = 5.0 \text{ V}$ and $V_a = 0 \text{ V}$	If	typ. max.	28 32		
Filament peak starting current	Ifp	max.	70	A	
Cold filament resistance	Rfo	approx.	0,020	Ω	
Waiting time (time before application of high voltage)	tia	min.	10	S	

^{*} Measured with a moving-coil instrument.

^{**} With d.c. heating the filament connector must have positive polarity.

TYPICAL CHARACTERISTICS					notes
Frequency, fixed within the band	f	2,425 to 2	,475	GHz	1
Anode voltage at I _a mean = 380 mA	Va	5,8	+ 0 - 0,4	kV	1,2,3
Output power into matched load	W_{O}		1,3	kW	
LIMITING VALUES (Absolute maximum rating system)					
Anode current, mean	l _a	max. min.		mA mA	2
Anode current, peak at I _a mean = 380 mA	lap	max.	800	mA	2
Anode voltage, positive and negative	Va	max.	10	kV	4
Anode input power	Wia	max.	2,7	kW	
Voltage standing-wave ratio (measured with probe 55336) continuous	VSWR	max.	4		
during max. 0,02 s and max. 20% of the time	VSWR	max.	10		5
Anode temperature at reference point				1	
indicated on outline drawing	Ta	max.	180	oC	
Temperature at any other point on the tube	T	max.	200	oC	
COOLING					
Anode block		forced air			
Filament terminal structure		forced air			
Inlet air, typical					
Temperature	Ti		35	oC	
Quantity	q		1,2	m³/min	
Pressure drop	pi		100	Pa	

It is recommended that a thermoswitch be mounted at the place indicated in the outline drawing to protect the magnetron against overheating.

On stand-by, with $V_f = 5.0 \text{ V}$, some air-cooling is necessary to keep the temperature of the filament terminal, the filament/cathode terminal and the anode block below the maximum limit.

Notes

- 1. Measured under matched load conditions (VSWR ≤ 1,05).
- 2. Measured with a moving-coil instrument.
- 3. Measured on a filtered anode voltage supply ($I_{ap} \le 480 \text{ mA}$).
- 4. It is recommended that a suitable spark gap be connected between the filament connectors and the anode (earth) to prevent the maximum anode voltage being exceeded.
- 5. This means: Any period of time up to 0,02 s during which the VSWR is between 4 and 10 must be followed by a period four times as long during which the VSWR is < 4. When operated under these conditions the magnetron should not be permitted to mode.</p>

DESIGN AND OPERATING NOTES

General

Whenever it is considered necessary to operate the magnetron at conditions substantially different from those indicated under "Typical operation" the tube manufacturer should be consulted.

The equipment should be designed around the tube specifications given in this data and not around one particular tube since, due to normal production variations, the design parameters (V_a, R_{fo}, f, W_o etc.) will vary around the nominal values.

Anode supply

It is recommended that the magnetron be operated from an LC stabilized anode supply unit. The unit should be designed so that the limiting values for mean and peak anode current are not exceeded.

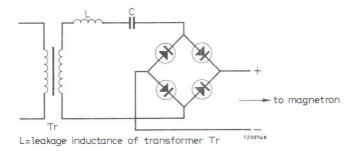


Fig. 1 Basic series resonant circuit of an LC power supply.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since in normal magnetron operation the cathode will be at high negative potential and the anode will be earthed.

The transformer should be designed so that the filament voltage and surge current limits are not exceeded.

Filament/cathode connectors

The magnetron has a high filament current and losses in filament voltage caused by bad connections will result in poor operation. Therefore, it is important to ensure that the filament and filament/cathode connectors make good electrical and thermal contact with their respective terminals.

The connectors, types 55323 and 55324, shown in the drawings have been designed to give the required contact and are recommended for use with this magnetron. A coating of a high temperature resistant silicone grease is recommended to prevent oxidation.

The electrical conductors of the cathode and filament connectors should be of flexible construction in order to eliminate undue stress on the terminals.

Load impedance, measured with measuring probe

The probe 55336 simulates the r.f. output system of the magnetron; it may be coupled to a waveguide, a coaxial line, or directly into a cavity in place of the magnetron; in all cases the type 55341 gasket should be used. The termination of the probe matches a standard male N-type connector.

The use of this measuring probe enables the designer of microwave heating equipment to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron.

Antenna

When an antenna is used, the part of the antenna screwed into the magnetron should be according to Fig. 2.




Fig. 2.

A soft copper washer of 0,5 mm thickness type no. 55328 is required between the antenna and the tube to ensure reliable r.f. contact. The maximum torque applied when screwing the antenna into the tube is 150 Ncm.

Stand-by operation

Without anode voltage, the filament voltage during any stand-by period should be kept at $V_f = 5.0 \text{ V}$. Some forced-air cooling will be required to prevent overheating. The full anode voltage may be applied without further waiting time.

Shielding

Where required, r.f. radiation from the filament terminals may be reduced by external filtering and/or shielding. Detailed information may be obtained from the manufacturer.

Tube cleanliness

The ceramic parts of the input and output structures of the tube must be kept clean during operation. A protective cover of suitable material should be placed over the tube output if the tube is inserted directly into a cavity. The cooling air should be filtered and ducted to prevent deposits forming on the insulation during operation.

Output coupling

The tube may be coupled by suitable means to a waveguide, a coaxial line, or directly into a cavity.

HANDLING, STORAGE AND MOUNTING

Handling and storage

The original pack should be used for transporting and storing the tube. Shipment of the tube mounted in the equipment is not permitted unless specifically authorized by the tube manufacturer.

When the tubes have to be unpacked, e.g. at an assembly line or for measurement purposes, care should be taken that a minimum distance of 15 cm is maintained between magnets. As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling and storing unpacked tubes that such shocks and vibration are avoided. High intensity magnetic fields associated with transformers and other magnetic equipment can demagnetize the magnets. Such fields should not be present when the tube is stored, handled or serviced. The best protection of the tube is its original pack. The user should be aware of the strong magnetic fields around the magnet. When handling and mounting the magnetron, he must use non-magnetic tools and be extremely careful not to have watches and other precision instruments nearby.

Mounting

When magnetic materials are present in two or more planes, the minimum distance from the magnet shall be 13 cm in all directions.

In order to assure a good r.f. contact between the output of the tube and the circuit in which it is connected, the use of the gasket 55341 is essential.

The output coupling of the tube should not be used as the only means of mounting the magnetron. The magnetron should be mounted and secured by the two mounting holes indicated on the outline drawing. When mounting the magnetron, all tools (screwdrivers, wrenches etc.) used close to or in contact with the magnetron must be made of non-magnetic material to avoid unwanted attraction and possible mechanical damage to ceramic parts as well as short-circuiting of the magnetic flux.

The power supply lead to the anode shall be connected to one of the mounting holes (see "a" on the outline drawing).


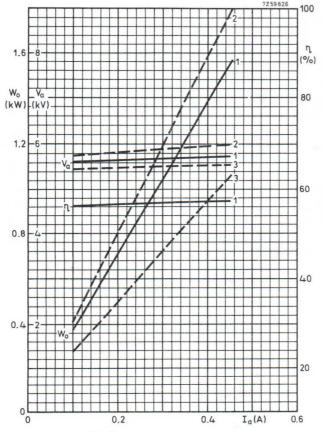


Fig. 3.

- 1) with VSWR ≤ 1,05
- 2) with VSWR = 3 in sink region
- 3) with VSWR = 3 in anti sink region

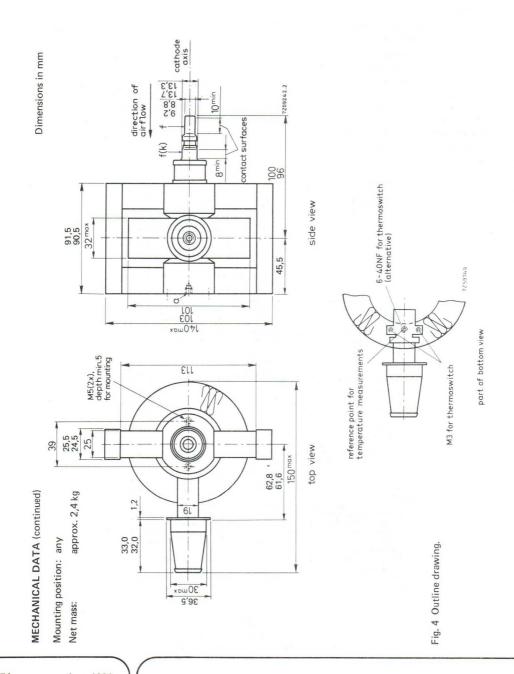

ACCESSORIES

Dimensions in mm




Fig. 5 Measuring probe 55336, for cold measurements only.






Fig. 6 R.F. gasket 55341, material: monel mesh.

Fig. 7 Washer 55328, material: soft copper.




Fig. 8 Filament/cathode connector 55324.




Fig. 9 Filament connector 55323.

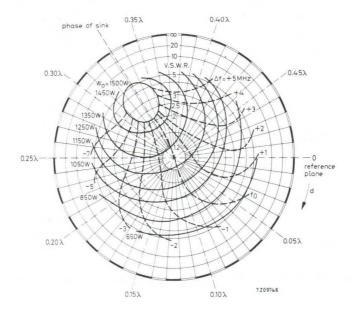


Fig. 10 Load diagram.

Mean anode current

380 mA

Frequency

f.

2,450 GHz

Constant air cooling

d= distance of voltage standing wave minimum from the reference plane for electrical measurements (measuring probe 55336) towards load

CONTINUOUS-WAVE MAGNETRON

Integral-magnet, forced-air cooled continuous-wave magnetron with integral r.f. filter intended for microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 2,5 kW.

QUICK REFERENCE DATA

Frequency, fixed within the band	f	2,425 to 2,475	GHz			
Output power	W_{o}	2,5	kW			
Construction	packaged, metal-ceramic					
Cathode	quick heating					
R.F. filter	integral					

TYPICAL OPERATION with the tube coupled to an R26 waveguide according to Fig. 3

0-1	itions	

Filament voltage, starting	V_{f}	5,0	V
Waiting time	t_W	10	S
Filament voltage, operating	V_{f}	3,5	V
Anode supply		L-C stabilized	
Anode current, mean	la	680	mA
Anode current, peak	lap	1100	mA
Load impedance, measured with probe 55345 Voltage standing-wave ratio Phase, in direction of load, with respect to reference plane	VSWR	2,5 0.14	λ
Cooling; rate of flow	q	-,-	m³/min*

Performance		
Filament current at V _f = 3,5 V	If	27 A
Anode voltage, peak	V_{ap}	5,7 kV
Output power	W _o W _o min.	2,5 kW 2,25 kW
Efficiency	η	69 %

CATHODE: Thoriated tungsten

^{*} Based on a cooling air inlet temperature T_i = max. 50 °C.

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.

	With d.c. the terminal f(k) must have positive polarity.				
	Filament voltage, starting and stand-by operating at I _{a mean} = 680 mA	V _f			V ± 10% V ± 10%
	Filament current at $V_f = 5.0 \text{ V}$, $I_a = 0$	If	<	41 45	
	at $V_f = 3.5 \text{ V}$, $I_a = 680 \text{ mA}$	If		27	Α
	Filament current, peak starting	Ifp	max.	150	Α
	Cold filament resistance	Rfo		13	$m\Omega$
-	Waiting time (time before application of high voltage)	t_W	min.	10	S

TYPICAL CHARACTERISTICS

Measured under matched load conditions (VSWR ≤ 1,05) and L-C stabilized power supply. (See "Design and operating notes".)

Frequency, fixed within the band	f	2,425 to 2,475	GHz	
Anode voltage, peak	V _{ap}	5,5	kV	
Anode current, mean	la	700	mA	
Output power	W_{o}	2,2	kW	

LIMITING VALUES (Absolute maximum rating system)					
Anode current, mean	la	max.	750	mA	
Anode current, peak	lap	max.	1250	mA	
Anode voltage*	Va	max.	10	kV	
Temperature of mounting bracket at central contact point of thermoswitch (see also under "Cooling")	Т	max.	140	οС	
Voltage standing-wave ratio, measured with probe 55345	VSWR	max.	5		

Any period of time up to 0,02 s during which the VSWR is between 5 and 10 must be followed by a period four times as long during which the VSWR is ≤ 5. When operating under these conditions the magnetron should not be permitted to mode.

COOLING

Anode block and filament structure

forced air

max.

10

VSWR

For pressure drop as a function of rate of flow see Fig. 8.

The cooling air must be so ducted that it is uniformly distributed.

Direction of air flow: see outline drawing.

during max. 0,02 s and max. 20% of the time

With only the filament voltage applied some air cooling is required to keep the temperature below the limiting value.

The magnetron is provided with a normally closed thermoswitch to protect the tube against overheating. The thermoswitch is rated 250 V (a.c.), 10 A. Switching-off temperature 135 ± 5 °C.

^{*} It is recommended that a suitable spark gap be connected between the filament/cathode terminal and the anode (earth) to prevent the max, anode voltage being exceeded.

DESIGN AND OPERATING NOTES

General

Whenever it is considered necessary to operate the magnetron at conditions substantially different from those indicated under "Typical operation" the tube manufacturer should be consulted.

The equipment should be designed around the tube specifications given in this data and not around one particular tube since, due to normal production variations, the design parameters (V_a, R_{fo}, f, W_o etc.) will vary around the nominal values.

ANODE SUPPLY

The magnetron may be operated from an L-C stabilized power supply. Detailed information on power supply design available on request.




Fig. 1 Basic series resonant circuit of an L-C power supply.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since during normal magnetron operation the anode is earthed and the cathode will be at a high negative potential with respect to the anode.

The transformer should be so designed that the filament voltage and peak filament starting current limits are not exceeded.

Filament and filament/cathode connections

The magnetron has a high filament current and losses in filament voltage caused by bad connections, will result in poor operation. Therefore, it is important to ensure that the leads make good electrical and thermal contact with the tube terminals.

Load impedance, measured with measuring probe

The probe 55345 simulates the r.f. output system of the magnetron; it may be coupled to an R26 waveguide to replace the magnetron; in all cases the type 55344 gasket should be used. The termination of the probe matches a standard N-type connector.

This measuring probe enables the designer of the microwave heating equipment to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron.

Tube cleanness

The ceramic parts of the input and output structure of the tube must be kept clean during installation and operation. The cooling air should be filtered to prevent deposits forming on the insulation.

STORAGE, HANDLING AND MOUNTING

Storage and handling

The original pack should be used for transporting the tube. Shipment of the tube mounted in the equipment is permitted if specifically authorized by the manufacturer.

When the tubes have to be unpacked, e.g. at an assembly line or for measurement purposes, care should be taken that a minimum distance of 13 cm is maintained between tubes. As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling and storing unpacked tubes that such shocks and vibration are avoided. High intensity magnetic fields associated with transformers and other magnetic equipment can demagnetize the magnets. They should not be present when the tube is stored or serviced. The best protection of the tube is its original pack.

The user should be aware of the strong magnetic fields around the tube. When handling and mounting the magnetron, he must use non-magnetic tools and be extremely careful not to have precision instruments nearby.

Mounting

The magnetron should be mounted with two M4 bolts fitting the nuts on the mounting bracket (see outline drawing).

The output coupling should not be used as the only means of mounting and be kept free from undue stress.

The minimum distance between the magnetron and magnetized materials shall be 13 cm. The minimum distance between the magnetron and other ferromagnetic materials shall be 3 cm.

The gasket 55344 is essential to ensure good r.f. contact between the output of the magnetron and the waveguide to which it is connected.


All tools (screwdrivers, wrenches, etc.) used close to or in contact with the magnetron must be of non-magnetic material to avoid unwanted attraction and possible mechanical damage to ceramic parts as well as short-circuit of the magnetic flux.

MECHANICAL DATA

Mounting position: any Net mass: approx. 2 kg

ACCESSORIES

Thermoswitch, mounted on tube	type 55347
R.F. gasket, supplied with tube	type 55344
Measuring probe (for measurements only, see Fig. 2)	type 55345

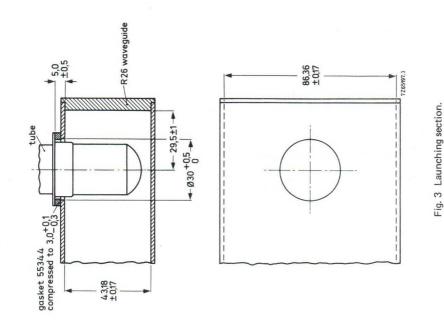

type N connector

reference plane for
referenc

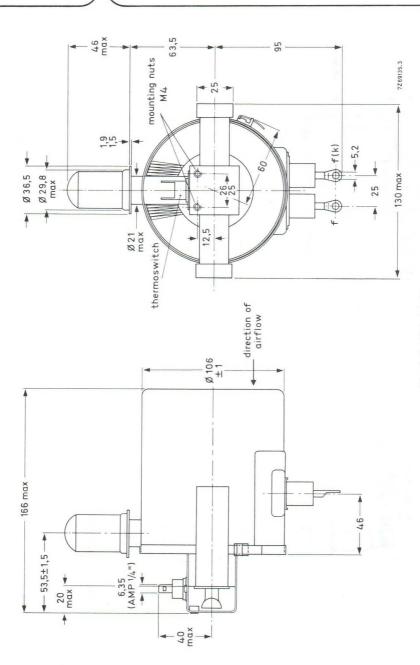


Fig. 4 Outline drawing.

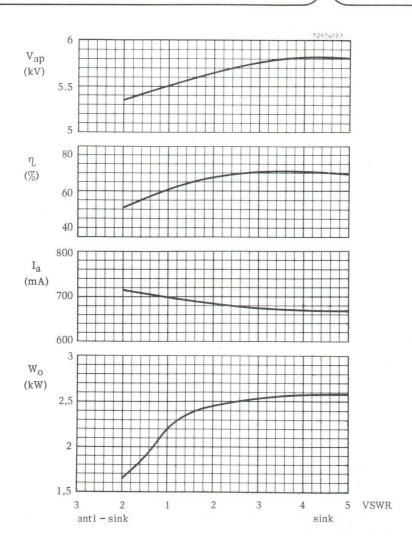


Fig. 5.

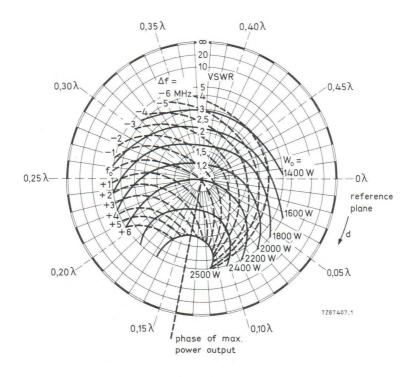


Fig. 6 Load diagram.

Measured with an L-C stabilized power supply.

Mean anode current $I_a = 700$ mA at matched load.

Frequency $f_0 = 2,450 \text{ GHz}$.

Constant air cooling $q = 2.5 \text{ m}^3/\text{min}$.

d = Distance of voltage standing wave minimum from the reference plane for electrical measurements (measuring probe 55345) towards load.

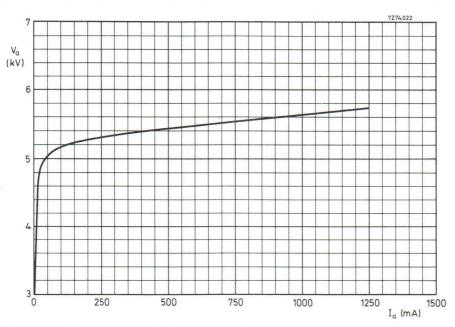


Fig. 7 Dynamic characteristic; anode voltage as a function of anode current at VSWR = 2,5 in direction of sink.




Fig. 8 Pressure drop as a function of rate of flow (air).

2,425 to 2,475 GHz

3 kW

Wo

water, see Fig. 9

air, q = 60 ℓ /min. see Fig. 8. Inlet temperature $T_i = max. 50 \, {}^{\circ}C$

CONTINUOUS-WAVE MAGNETRON

Integral-magnet, water cooled continuous-wave magnetron with integral r.f. filter, intended for industrial microwave applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 3 kW.

QUICK REFERENCE DATA

Output power

Frequency, fixed within the band

	•				
Construction	packaged, metal-ceramic quick heating				
Cathode					
R.F. filter	integral				
TYPICAL OPERATION with the tube coupled to an R2	6 waveguide according to F	ig. 2			
Conditions					
Filament voltage, starting	Vf	5,0	V		
Waiting time	t_W	10	S		
Filament voltage, operating	Vf	2,5	٧		
Anode supply	three-phase	three-phase, full-wave rectified			
Anode current, mean	la	800	mΑ		
Anode current, peak	lap	< 1100	mA		
Load impedance measured with probe 55345 Voltage standing-wave ratio	VSWR	2,5			
Phase, in direction of load, with respect to reference plane	d	0,14	λ		

Performance

Cooling of anode block

Cooling of filter box

Citornance					
Filament current at V _f = 2,5 V	If		20	Α	
Anode voltage, peak	V_{ap}		6	kV	
Output power	W _o W _o	>	3,2 2,9		
Efficiency	η		70	%	

CATHODE: Thoriated tungsten

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.

With d.c. the terminal f(k) must have positive polarity.

Filament voltage, starting and stand-by operating at I _{a mean} = 800 mA	V_{f}			V ± 10% V ± 10%
Filament current at $V_f = 5.0 \text{ V}$, $I_a = 0$	If	<	41 45	
at $V_f = 2,5 \text{ V}, I_a = 800 \text{ mA}$	If		20	A
Filament current, peak starting	Ifp	max.	150	Α
Cold filament resistance	Rfo		13	$m\Omega$
Waiting time (time before application of high voltage)	t_W	min.	10	S

Immediately after applying the anode voltage the filament voltage must be reduced to the operating value. See Fig. 7.

TYPICAL CHARACTERISTICS

Frequency, fixed within the band

Measured under matched load conditions (VSWR \leq 1,05) and three-phase full-wave rectified supply. (See "Design and operating notes".)

2,425 to 2,475 GHz

Anode voltage, peak	V_{ap}		5,8	kV	
Anode current, mean	la		800	mA	
Output power	W_{o}		2,8	kW	
LIMITING VALUES (Absolute maximum rating system)					
Anode current, mean	la	max.	850	mA	
Anode current, peak	lap	max.	1100	mA	
Anode voltage*	Va	max.	10	kV	
Cooling water outlet temperature, open cooling circuit	To	max.		оС	
closed cooling circuit	To	max.	75	oC	

Temperature of mounting bracket at central contact point of thermoswitch (see also under "Cooling") T max. 120 °C

Voltage standing-wave ratio, measured with probe 55345 VSWR max. 5 during max. 0,02 s and max. 20% of the time VSWR max. 10

Any period of time up to 0,02 s during which the VSWR is between 5 and 10 must be followed by a period four times as long during which the VSWR is \leq 5. When operating under these conditions the magnetron should not be permitted to mode.

^{*} It is recommended that a suitable spark gap be connected between the filament/cathode terminal and the anode (earth) to prevent the maximum anode voltage being exceeded.

COOLING

Anode block

water

For pressure drop as a function of rate of flow see Fig. 9.

Filter box

air

For pressure drop as a function of rate of flow see Fig. 8.

With only the filament voltage applied the air cooling and some water cooling is required,

The magnetron is provided with a normally closed thermoswitch to protect the tube against overheating. The thermoswitch is rated 250 V (a.c.), 10 A. Switching-off temperature 115 \pm 5 °C.

DESIGN AND OPERATING NOTES

General

Whenever it is considered necessary to operate the magnetron at conditions substantially different from those indicated under "Typical operation" the tube manufacturer should be consulted.

The equipment should be designed around the tube specification given in this data and not around one particular tube since, due to normal production variations, the design parameters (V_a , R_{f0} , f, W_0 etc.) will vary around the nominal values.

Anode supply

The magnetron may be operated from a non-smoothed three-phase full-wave rectified supply unit. This unit should be so designed that no limiting value for the mean and peak anode current is exceeded, whatever the operating conditions. The use of a current limiting device is recommended.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since during normal magnetron operation the anode is earthed and the cathode will be at high negative potential with respect to the anode.

The transformer should be so designed that the filament voltage and peak filament starting current limits are not exceeded.

Filament and filament/cathode connections

The magnetron has a high filament current and losses in filament voltage caused by bad connections will result in poor operation. Therefore, it is important to ensure that the leads make good electrical and thermal contact with the tube terminals.

Load impedance, measured with measuring probe

The probe 55345 simulates the r.f. output system of the magnetron; it may be coupled to an R26 waveguide to replace the magnetron; in all cases the type 55344 gasket should be used. The termination of the probe matches a standard N-type connector.

The measuring probe enables the designer of the microwave heating equipment to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron.

Tube cleanness

The ceramic parts of the input and output structure of the tube must be kept clean during installation and operation. The cooling air should be filtered to prevent deposits forming on the insulation.

STORAGE, HANDLING AND MOUNTING

Storage and handling

The original pack should be used for transporting the tube. Shipment of the tube mounted in the equipment is permitted if specifically authorized by the manufacturer.

When the tubes have to be unpacked, e.g. at an assembly line or for measurement purposes, care should be taken that a minimum distance of 13 cm is maintained between tubes. As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling and storing unpacked tubes that such shocks and vibration are avoided. High intensity magnetic fields associated with transformers and other magnetic equipment can demagnetize the magnets. They should not be present when the tube is stored or serviced. The best protection of the tube is its original pack.

The user should be aware of the strong magnetic fields around the tube. When handling and mounting the magnetron, he must use non-magnetic tools and be extremely careful not to have precision instruments nearby.

Mounting

The magnetron should be mounted with two M4 bolts fitting the nuts on the mounting bracket (see outline drawing).

The output coupling should not be used as the only means of mounting and be kept free from undue stress.

The minimum distance between the magnetron and magnetized materials shall be 13 cm. The minimum distance between the magnetron and other ferromagnetic materials shall be 3 cm.

The gasket 55344 is essential to ensure good r.f. contact between the output of the magnetron and the waveguide to which it is connected.

All tools (screwdrivers, wrenches etc.) used close to or in contact with the magnetron must be of non-magnetic material to avoid unwanted attraction and possible mechanical damage to ceramic parts as well as short circuit of the magnetic flux.

MECHANICAL DATA

Mounting position:


Net mass: approx. 1,8 kg

anv

Accessories

Thermoswitch, mounted on tube type 55364
R.F. gasket, supplied with tube type 55344
Measuring probe (for measurements only, see Fig. 1) type 55345

Recommended isolator 2722 163 02004

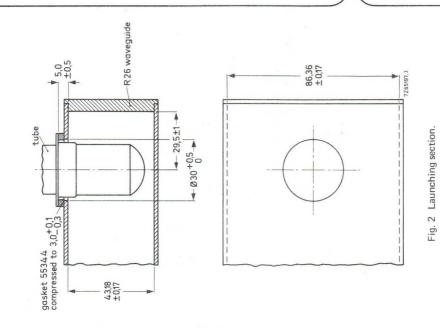

46max


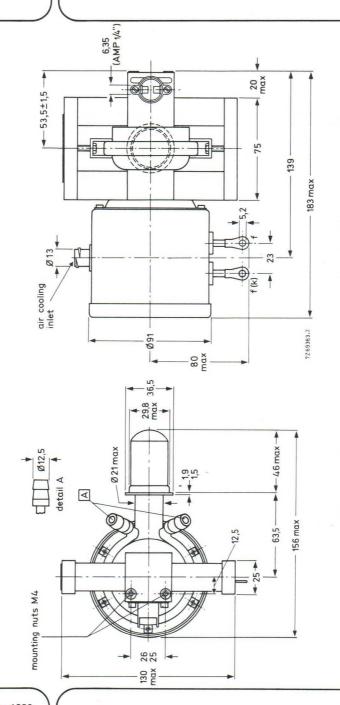


Fig. 3 Outline drawing.

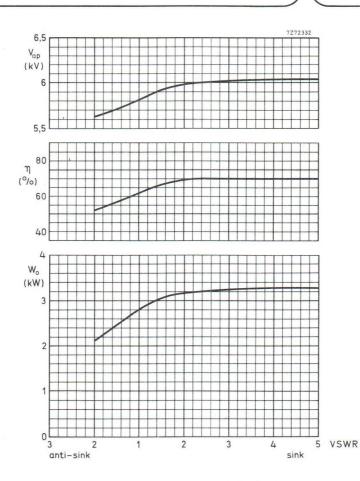

 $I_a = 800 \text{ mA}$

Fig. 4.

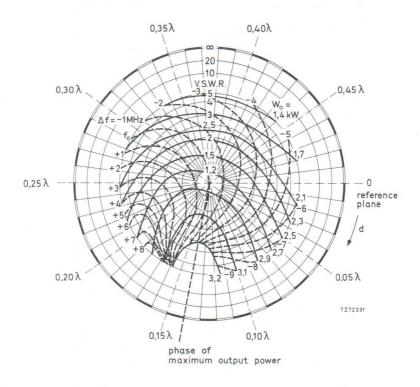


Fig. 5 Load diagram.

Measured with a three-phase full-wave rectified power supply.

Frequency $f_0 = 2,450 \text{ GHz}.$

Anode current, mean

 $I_a = 800 \text{ mA}.$

Anode current, peak

I_{ap} = 1000 mA at matched load.

Constant cooling.

d = Distance of voltage standing wave minimum from the reference plane for electrical measurements (measuring probe 55345) towards load.

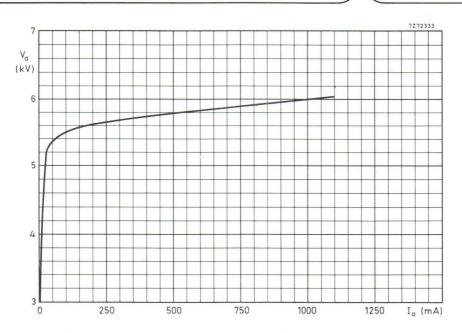


Fig. 6 Dynamic characteristic: anode voltage as a function of anode current at VSWR = 2,5 in direction of sink.




Fig. 7 Filament voltage reduction curve.




Fig. 8 Pressure drop as a function of rate of air flow.




Fig. 9 Pressure drop and maximum inlet temperature as a function of rate of water flow.

CONTINUOUS-WAVE MAGNETRON

Integral-magnet, forced-air cooled continuous-wave magnetron with integral r.f. filter intended for microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 1,5 kW.

QUICK REFERENCE DATA

Frequency, fixed within the band	f 2,425 to 2,475 GHz
Output power	W _o 1,55 kW
Construction	packaged, metal-ceramic
Cathode	quick heating
R.F. filter	integral

TYPICAL OPERATION with the tube coupled to an R26 waveguide according to Fig. 3

Con		

Filament voltage, starting	V_{f}	5,0 V
Waiting time	t_W	10 s
Filament voltage, operating	Vf	3,5 V
Anode supply (see "Design and operating notes")	L-C stal	oilized
Anode current, mean	la	370 mA
Anode current, peak	lap	600 mA
Load impedance, measured with probe 55345 Voltage standing-wave ratio	VSWR	2,5
Phase, in direction of load, with respect to reference plane	d	0,14 λ
Cooling: rate of flow*	q min.	2 m³/min
Performance		
Filament current at V _f = 3,5 V	If	18 A

CATHODE: Thoriated tungsten

Anode voltage, peak

Output power

Efficiency

6 kV

1,55 kW 1,4 kW

70 %

 V_{ap}

 W_{o}

 W_{o}

min.

^{*} Based on a cooling air inlet temperature T_i = max. 50 °C.

HEATING: Direct by a.c. (50 Hz or 60 Hz) or d.c.

With d.c. the terminal f(k) must have positive polarity.

Filament voltage, starting and stand-by operating at lamean = 370 mA	V_{f}		- / -	V ± 10% V ± 10%
Filament current at $V_f = 5.0 \text{ V}$, $I_a = 0$	If		26	-
		<	29	
at $V_f = 3.5 \text{ V}$, $I_a = 370 \text{ mA}$	If		18	A
Filament current, peak starting	Ifp	max.	100	Α
Cold filament resistance	Rfo		20	$m\Omega$
Waiting time (time before application of high voltage)	tw	min.	10	S

TYPICAL CHARACTERISTICS

Measured under matched load conditions (VSWR \leq 1,05) and L-C stabilized power supply. (See "Design and operating notes".)

Frequency, fixed within the band	f	2,425 to 2,475	GHz
Anode voltage, peak	V_{ap}	5,9	kV
Anode current, mean	la	370	mA
Output power	W_{o}	1,35	kW

LIMITING VALUES (Absolute maximum rating system)

Anode current, mean	la	max.	400	mA	
Anode current, peak	lap	max.	900	mΑ	
Anode voltage*	Va	max.	10	kV	
Temperature of mounting bracket at central contact point of thermoswitch (see also under "Cooling")	Т	max.	140	oC	
Voltage standing-wave ratio, measured with probe 55345 during max. 0,02 s and max. 20% of the time	VSWR VSWR	max.	5,5 10		

Any period of time up to 0,02 s during which the VSWR is between 5,5 and 10 must be followed by a period four times as long during which the VSWR is \leq 5,5. When operating under these conditions the magnetron should not be permitted to mode.

COOLING

Anode block and filament structure

forced air

For pressure drop as a function of rate of flow, see Fig. 8.

The cooling air must be so ducted that it is uniformly distributed.

Direction of airflow: see outline drawing.

With only the filament voltage applied some air cooling is required to keep the temperature below the limiting value.

The magnetron is provided with a normally closed thermoswitch to protect the tube against overheating. The thermoswitch is rated 250 V (a.c.), 10 A. Switching-off temperature 135 \pm 5 °C.

^{*} It is recommended that a suitable spark gap be connected between the filament/cathode terminal and the anode (earth) to prevent the maximum anode voltage being exceeded.

DESIGN AND OPERATING NOTES

General

Whenever it is considered necessary to operate the magnetron at conditions substantially different from those indicated under "Typical operation" the tube manufacturer should be consulted.

The equipment should be designed around the tube specifications given in this data and not around one particular tube since, due to normal production variations, the design parameters (V_a , R_{fo} , f, W_o etc.) will vary around the nominal values.

Anode supply

The magnetron may be operated from an L-C stabilized anode supply unit. Detailed information on power supply design available on request.




Fig. 1 Basic series resonant circuit of an L-C power supply.

Filament supply

The secondary of the filament transformer must be well insulated from the primary since during normal magnetron operation the anode is earthed and the cathode will be at high negative potential with respect to the anode.

The transformer should be so designed that the filament voltage and filament peak starting current limits are not exceeded.

Filament and filament/cathode connections

The magnetron has a high filament current and losses in filament voltage caused by bad connections, will result in poor operation. Therefore, it is important to ensure that the leads make good electrical contact with the tube terminals.

Load impedance, measured with measuring probe

The probe 55345 simulates the r.f. output system of the magnetron; it may be coupled to an R26 waveguide to replace the magnetron; in all cases the type 55344 gasket should be used. The termination of the probe matches a standard N-type connector.

The measuring probe enables the designer of the microwave heating equipment to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron.

Tube cleanness

The ceramic parts of the input and output structure of the tube must be kept clean during installation and operation. The cooling air should be filtered to prevent deposits forming on the insulation during operation.

STORAGE, HANDLING AND MOUNTING

Storage and handling

The original pack should be used for transporting the tube. Shipment of the tube mounted in the equipment is permitted if specifically authorized by the manufacturer.

When the tubes have to be unpacked, e.g. at an assembly line or for measurement purposes, care should be taken that a minimum distance of 13 cm is maintained between tubes. As the thoriated tungsten filament is sensitive to shocks and vibration, care should be taken when handling and storing unpacked tubes that such shocks and vibration are avoided. High intensity magnetic fields associated with transformers and other magnetic equipment can demagnetize the magnets. They should not be present when the tube is stored or serviced. The best protection of the tube is its original pack.

The user should be aware of the strong magnetic fields around the tube. When handling and mounting the magnetron, he must use non-magnetic tools and be extremely careful not to have precision instruments nearby.

Mounting

The magnetron should be mounted with two M4 bolts fitting the nuts on the mounting bracket (see outline drawing). The magnetron earth connection can be made via these nuts.

The output coupling should not be used as the only means for mounting and be kept free from undue stress.

The minimum distance between the magnetron and magnetized materials shall be 13 cm. The minimum distance between the magnetron and other ferromagnetic materials shall be 3 cm.

The gasket 55344 essential to ensure good r.f. contact between the output of the magnetron and the waveguide to which it is connected.

All tools (screwdrivers, wrenches etc.) used close to or in contact with the magnetron must be of non-magnetic material to avoid unwanted attraction and possible mechanical damage to ceramic parts as well as short circuit of the magnetic flux.

MECHANICAL DATA

Mounting position: any

Net mass: approx. 2 kg

Accessories

Thermoswitch, mounted on tube type 55347 R.F. gasket, supplied with tube type 55344

Measuring probe (for measurements only, see Fig. 2) type 55345

reference plane for electrical measurements

type N connector

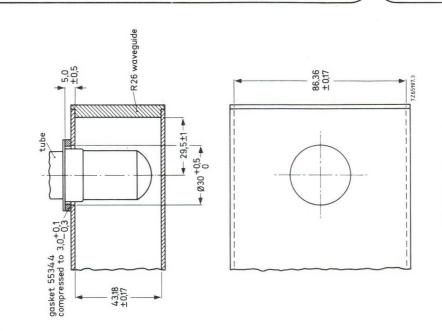


Fig. 3 Launching section.

Fig. 2 Measuring probe 55345.

-36.5

46max

124

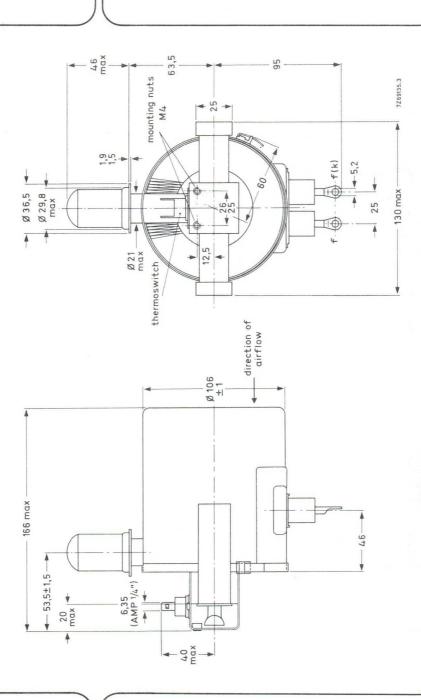


Fig. 4 Outline drawing.

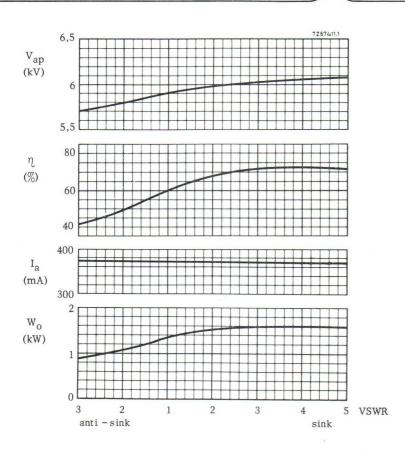


Fig. 5.

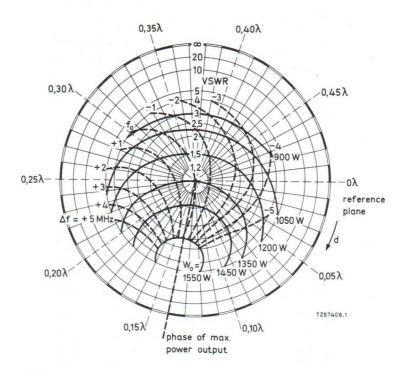


Fig. 6 Load diagram.

Measured with an L-C stabilized power supply. Mean anode current $I_a=370~\text{mA}$ at matched load. Frequency $f_O=2,450~\text{GHz}$. Constant air cooling $q=2\text{m}^3/\text{min}$.

d = Distance of voltage standing wave minimum from the reference plane for electrical measurements (measuring probe 55345) towards load.

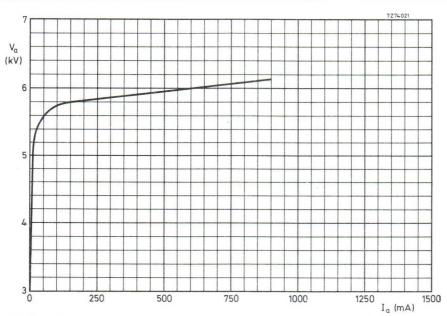


Fig. 7 Dynamic characteristic; anode voltage as a function of anode current at VSWR = 2,5 in direction of sink.





Fig. 8 Pressure drop as a function of rate of flow (air).



CONTINUOUS-WAVE MAGNETRON

Packaged, metal-ceramic, forced-air cooled, continuous-wave magnetron with integral r.f. cathode filter. The tube is primarily intended for use in domestic microwave ovens and features cold-start operation and high efficiency. Under typical operating conditions the output power is 1100 W. This lightweight tube may be mounted in any position.

QUICK REFERENCE DATA

Frequency, matched load	f	2,450 GHz
Output power	Wo	1100 W
Construction	packaged, metal-	ceramic
Cathode	thoriated tungste quick heating	n, cold-start,
R.F. cathode filter	integral	

TYPICAL OPERATION

Con		

Filament voltage	Vf		3,2	V
Anode supply (see "Design and operating notes")	L-C stabilize	d half-wave	doubler	
Anode current, mean	la		380	mA
Anode current, peak	lap	\approx	1250	mA
Cooling; rate of flow	q		1	m³/min

Performance (at matched load; for other load cond	itions see Fig. 5)			
Filament current	If		14,5	A
Anode voltage, peak	V_{ap}		4	kV
Frequency	f		2,450	GHz
Output power	W _o W _o	>	1100 950	
Efficiency	η		72	%

CATHODE: Thoriated tungsten, cold start, quick heating

	Δ.		

Filament voltage

Filament current at $V_f = 3.2 \text{ V}$, $I_a = 0$	1f	1	15,5	A
Cold filament resistance	R _{fo}		30	$m\Omega$
Pre-heating time (waiting time)	t_W		10	
TYPICAL CHARACTERISTICS				
Frequency, fixed within the band	f	2,435 to 2,	465	GHz
Phase of sink, measured with probe type 55371	d	(),11	λ
LIMITING VALUES (Absolute maximum rating system)				
Filament voltage	V_{f}	max. min.	-	V + 10% V -10%
Anode current, mean	la	max.	420	mA
Anode current, peak			*	
Anode voltage**	V_a	max.	12	kV
Cooling; rate of flow	q	min.	1	m ³ /min
Temperature at reference point (see outline drawing)	Т	max.	180	oC
Voltage standing-wave ratio, measured with probe 55371 during max. 0,02 s and max. 20% of the time	VSWR VSWR	max.	4 10	

3,2 V ± 10%

Any period of time up to 0,02 s during which the VSWR is between 4 and 10 must be followed by a period four times as long during which the VSWR is \leq 4.

COOLING

Anode block	force	d air	
Required quantity of air, based on an air inlet temperature of 50 °C max. under typical operating conditions	q	min.	1 m³/min
Pressure drop as a function of rate of flow	see Fi	ig. 7	
Direction of air flow through radiator	arbitr	ary	

To protect the magnetron against overheating it is recommended that a thermoswitch be mounted in the position shown on the outline drawing. Thermoswitch switching-off temperature 100 °C.

^{*} Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the r.f. loading conditions such as VSWR, phase of reflection, and coupling section. It also depends on peak anode current, mean anode current, and current waveform. For a magnetron operating from an L-C stabilized half-wave doubler anode supply, the peak to mean anode current ratio is approximately 3 to 3,5.

^{**} For "cold-start" operation it is recommended that, for the anode voltage, a rectifier be used with a reverse breakdown voltage of 10 to 12 kV and having an avalanche energy rating of \geq 2 J.


DESIGN AND OPERATING NOTES

General

Whenever operation of the magnetron at conditions substantially different from those indicated under "Typical operation" is considered the tube supplier should be consulted.

Anode supply

The magnetron may be operated from an L-C stabilized half-wave doubler anode supply unit.



L = Leakage inductance of transformer T

Fig. 1 Basic circuit of an L-C stabilized half-wave doubler anode supply unit.

Filament supply

The filament winding of the transformer must be well insulated from the primary winding since the anode is earthed and the cathode is at a high negative potential with respect to the anode and the primary winding.

When "variable power control" is used, please contact the tube supplier.

Load impedance, measured with measuring probe

The measuring probe type 55371 enables the designer of the microwave oven to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron.

For the cold measurements the probe, with gasket type 55372, is coupled to the coupling section instead of the magnetron. The termination of the probe matches a standard N-type connector.

Assistance in the design of the h.f. part of the oven, including the magnetron coupling method, may be given by the tube manufacturer.

Tube cleanness

The ceramic parts of the input and output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a non-ferromagnetic coupling section by means of 4 screws through the holes in the air duct or by 4 mounting brackets catalogue number 4322 041 03832 which can be hooked into the slits in the air duct side-walls.

To ensure good r.f. contact between the magnetron and the coupling section the use of gasket type 55372 is essential.

MECHANICAL DATA

Mounting position: any Net mass: approx. 1 kg

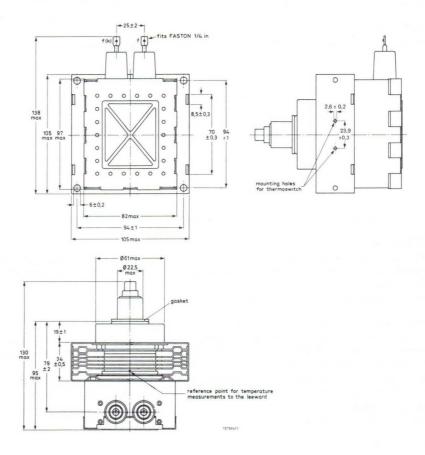


Fig. 2 Outline drawing.

ACCESSORIES

R.F. gasket, supplied with tube

Measuring probe for oven design measurements

type 55372 type 55371

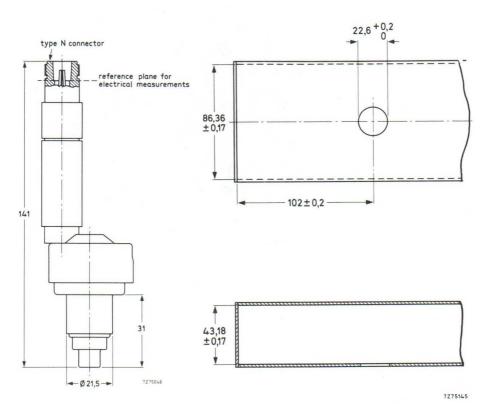


Fig. 3 Measuring probe type 55371.

Fig. 4 Coupling section for YJ1500 into a waveguide R26 (used for measurements).

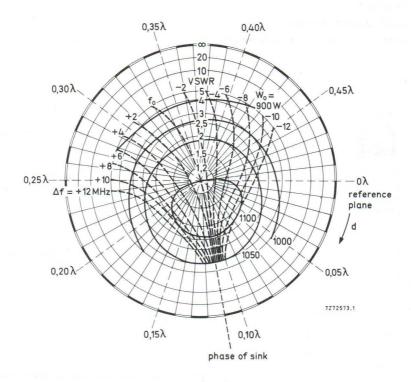


Fig. 5 Load diagram.

Measured with an L-C stabilized half-wave doubler anode supply.

Mean anode current I_a = 380 mA at matched load.

Frequency f_o = 2,450 GHz.

Constant air cooling q = 1 m³/min.

d = Distance of voltage standing wave minimum from the reference plane for electrical measurements (measuring probe type 55371) towards load.

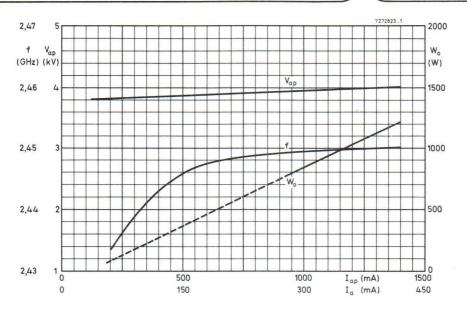


Fig. 6 Peak anode voltage, V_{ap} , as a function of peak anode current, I_{ap} . Frequency, f, as a function of peak anode current, I_{ap} . Output power, W_{o} , as a function of mean anode current, I_{a} , measured with an L-C stabilized half-wave doubler supply with $\frac{I_{ap}}{I_{a}} = \frac{10}{3}$. Load: matched.




Fig. 7 Pressure drop, p_i , across radiator as a function of air flow, q.

....

CONTINUOUS-WAVE MAGNETRON

Packaged, metal-ceramic, forced-air cooled, continuous-wave magnetron with integral r.f. cathode filter. The tube is primarily intended for use in diathermy and other low-power heating applications. The tube features cold start operation and high efficiency.

QUICK REFERENCE DATA

Frequency, matched load	f	2,455 GH	
Output power	W_{o}	265 W	
Construction	packaged, metal-ceramic		
Cathode	thoriated tungsten cold start, quick heating		
R.F. cathode filter	integral		
Cooling	forced air	•	

TYPICAL OPERATION

Tube coupled to waveguide section of Fig. 1.

At matched load in coaxial output line; for other load conditions see Fig. 3.

Anode supply

OPERATION A: Unsmoothed single-phase full-wave rectified voltage

OPERATION B: Pulsed

Conditions		Α	В	
Filament voltage, a.c. 50 or 60 Hz	V_{f}	4	4	V
Anode current mean peak	I _a I _{ap}	150 500	900	mA mA
Cooling rate of flow	qmin	500	500	I/min
Pressure drop	pi	40	40	Pa
Performance				
Filament current	If	17,5	17,5	Α
Anode voltage, peak	Vap	2,9	3,0	kV
Frequency	f	2,455	2,455	GHz
Output power, VSWR < 1,05	Wo	255	265	W
Efficiency	η	61	61	%

HEATING

Thoriated tungsten, cold start, quick-heating cathode		
Filament voltage	Vf	4 V ± 10%
Filament current at $V_f = 4 V$, $I_a = 0$	If	17,5 A
Cold filament resistance	R _{fo}	$30~\text{m}\Omega$
Pre-heating time (waiting time)	t_W	10

For "cold start" operation it is recommended that a rectifier be used with a reverse breakdown voltage of 10 kV and having an avalanche energy of 2 joule.

GENERAL DATA

Electrical

Frequency, fixed within the band	f	2,445 to 2,465 GHz
Phase for maximum output power	d	0,09 λ

Mechanical

Mounting position	any		
Mass		~	1,0 kg
LIMITING VALUES (Absolute maximum rating system)			
Filament voltage	Vf	max.	4,4 V
Thament voltage	٧ †	min.	3,6 V
Anode current			
mean	la	max.	200 mA

peak	a		950	mA*
Anode voltage	Va	max.	10	kV
Temperature at reference point (see outline drawing)	Т	max.	180	oC
Voltage standing-wave ratio	VSWR	max.	5	
				00

Storage temperature min. -30 °C

COOLING

Anode block forced air

Required quantity of air, based on an air inlet temperature of 50 °C max. under typical operating conditions q min. 300 I/min

Pressure drop as a function of rate of flow see Fig. 6

Direction of air flow through radiator arbitrary

To protect the magnetron against overheating it is recommended that a thermoswitch be mounted in the position shown on the outline drawing. Temperature at which the thermoswitch will switch off: see Fig. 4.

^{*} Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the R.F. loading conditions such as VSWR, phase of reflection, and coupling section. It also depends on peak anode current, mean anode current, and current waveform.

DESIGN AND OPERATING NOTES

General

Whenever operation of the magnetron at conditions substantially different from those indicated under *Typical operation* is considered the tube supplier should be consulted.

Filament supply

The filament winding of the transformer must be well insulated from the primary winding since the anode is earthed and the cathode is at a high negative potential with respect to the anode and the primary winding.

Tube cleanness

The ceramic part of the output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a coupling section by means of the 3 bolts M4 (see outline drawing). To ensure good r.f. contact between the magnetron and the coupling section, the nuts should be fastened evenly.

ACCESSORIES

R.F. gasket, supplied with the tube, type 55372.

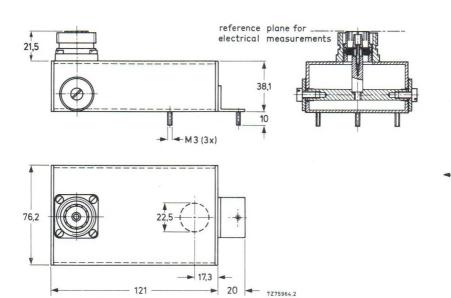


Fig. 1 Coupling section (detailed drawings available on request).

MECHANICAL DATA

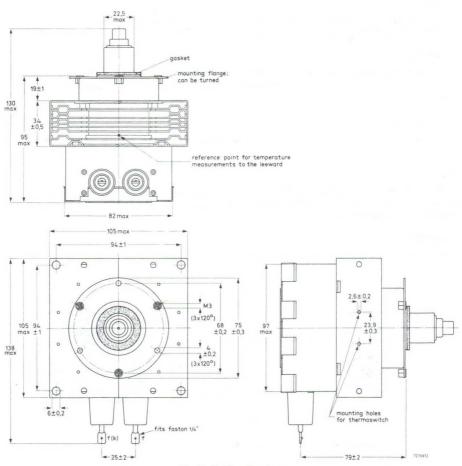


Fig. 2 Outline drawing.

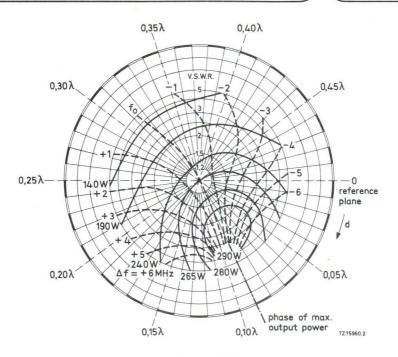


Fig. 3 Load diagram.

Reference plane

output of coupling section (see Fig. 1).

Anode supply

operation B: pulsed

Filament voltage

4 V

Average anode current

150 mA

Peak anode voltage

3 kV

Frequency at matched load

 $f_0 = 2,455 \text{ GHz}$

d = distance of VSWR - minimum from reference plane towards load

Diagram measured in cold condition.

Cooling characteristics

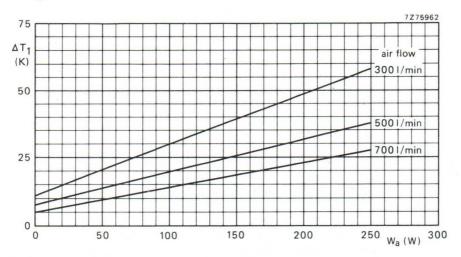


Fig. 4 Increase temperature of thermoswitch mounting position above inlet air temperature, ΔT_1 as a function of anode dissipation, W_a .

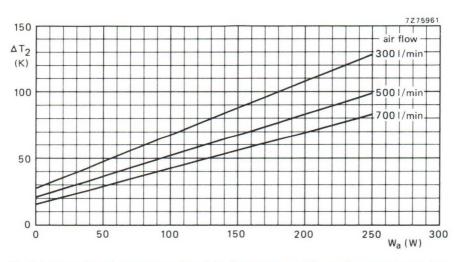


Fig. 5 Increase of anode temperature above inlet air temperature, ΔT_2 , as a function of anode dissipation, W_a . Anode dissipation = (peak anode voltage) x (average anode current) — (output power). $V_f = 4 \text{ V}$.





Fig. 6 Pressure drop, p_i, across radiator as a function of air flow, q.



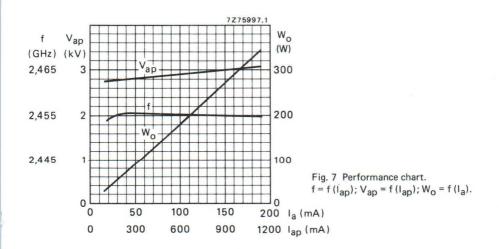

CONTINUOUS-WAVE MAGNETRON

Packaged, metal-ceramic, forced-air cooled, continuous-wave magnetron with integral r.f. cathode filter. The tube is primarily intended for use in diathermy and other low-power heating applications. The tube features cold start operation and high efficiency.

QUICK REFERENCE DATA

Frequency, matched load	f	2,46 GHz		
Output power	Wo	310 W		
Construction	packaged, me	packaged, metal-ceramic		
Cathode		thoriated tungsten cold start, quick heating		
R.F. cathode filter	integral			
Cooling	forced air			

TYPICAL OPERATION

Tube coupled to waveguide section of Fig. 1.

Matched load in coaxial output line; for other load conditions see Fig. 3.

Anode supply

OPERATION A: Unsmoothed single-phase full-wave rectified voltage

OPERATION B: Pulsed

Conditions		Α	В	
Filament voltage, a.c. 50 or 60 Hz	V_f	3,4	3,4	V
Anode current mean peak	I _a	150 750	900	mA mA
Cooling rate of flow	qmin	500		I/min
Pressure drop	pį	20	20	Pa
Performance				
Filament current	If	15	15	A
Anode voltage, peak	V_{ap}	3,0	3,0	kV
Frequency	f	2,46	2,46	GHz
Output power, VSWR < 1,05	Wo	300	310	W
Efficiency	η	68	68	%

HEATING			
Thoriated tungsten, cold start, quick-heating cathode			
Filament voltage	V_{f}	3,	4 V ± 10%
Filament current at $V_f = 3.4 \text{ V}$, $I_a = 0$	If	1	5 A
Cold filament resistance	Rfo	3	$2~\text{m}\Omega$
Pre-heating time (waiting time)	t_W		0
GENERAL DATA			
Electrical			
Frequency, fixed within the band	f 2	,450 to 2,47	0 GHz
Phase for maximum output power	d	0,1	2 λ
Mechanical			
Mounting position	any		
Mass		94	O g
LIMITING VALUES (Absolute maximum rating system)			
Filament voltage	V_{f}		5 V 5 V
Anode current		111111. 3,0	5 V
mean peak	la		0 mA 0 mA*
Anode voltage	Va	max, 1	0 kV
Temperature at reference point (see outline drawing)	Т	max. 18	0 °C
Voltage standing-wave-ratio	VSWR	max.	5
Storage temperature		min. -3	0 oC
COOLING			
Anode block	forced a	ir	
Required quantity of air, based on an air inlet temperature of 50 °C max. under typical operating conditions	q	min. 30	0 I/min
Pressure drop as a function of rate of flow	see Fig.		
Direction of air flow through radiator	arbitrary		
To protect the magnetron from overheating we recommend that a position shown on the outline drawing. Temperature at which the	thermoswitch	be mounted	

position shown on the outline drawing. Temperature at which the thermoswitch will switch off: see Fig. 4.

^{*} Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the R.F. loading conditions such as VSWR, phase of reflection, and coupling section. It also depends on peak anode current, mean anode current, and current waveform.

DESIGN AND OPERATING NOTES

General

Whenever operation of the magnetron at conditions substantially different from those indicated under *Typical operation* is considered the tube supplier should be consulted.

Filament supply

Simultaneous application of filament and anode voltage is permitted ('cold start'). The filament winding of the transformer must be well insulated from the primary winding since the anode is earthed and the cathode is at a high negative potential with respect to the anode and the primary winding.

Tube cleanness

The ceramic part of the output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a coupling section by means of the 4 bolts M5 (see outline drawing). To ensure good r.f. contact between the magnetron and the coupling section, the nuts should be fastened evenly.

FILTERS

Coupling filter of Fig. 1 meets CISPR11 recommendations up to 1 GHz. A filter meeting CISPR11 up to 18 GHz is also available.

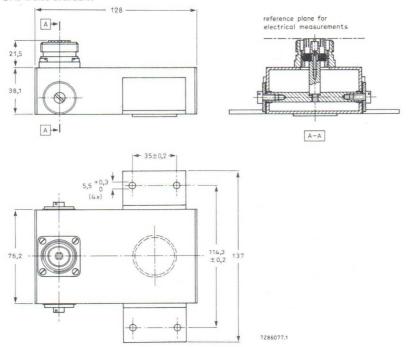

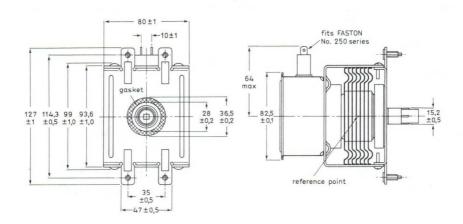


Fig. 1 Coupling filter (detailed drawings available on request).

→ MECHANICAL DATA








Fig. 2.

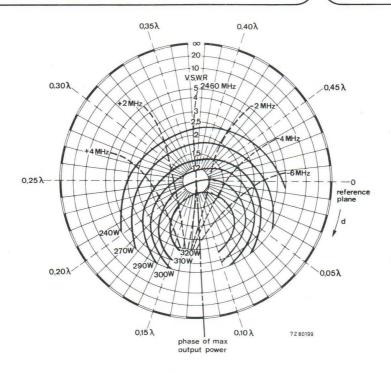


Fig. 3 Load diagram.

Reference plane

output of coupling section (see Fig. 1).

Anode supply

operation B: pulsed

Filament voltage

3,4 V

Average anode current

150 mA

Peak anode voltage

3 kV

Frequency at matched load

 $f_0 = 2,46 \text{ GHz}$

d = distance of VSWR - minimum from reference plane towards load

Diagram measured in cold condition.

Cooling characteristics

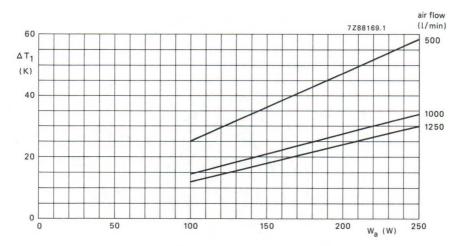


Fig. 4 Increase temperature of thermoswitch mounting position above inlet air temperature, ΔT_1 , as a function of anode dissipation, W_a .

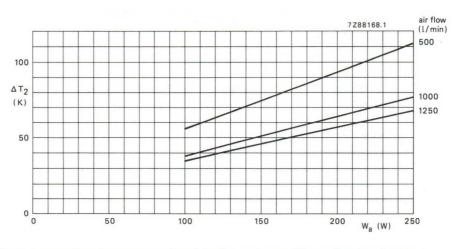


Fig. 5 Increase of anode temperature above inlet air temperature, ΔT_2 , as a function of anode dissipation, W_a . Anode dissipation = (peak anode voltage) x (average anode current) — (output power). $V_f = 3.4 \text{ V}$.




Fig. 6 Pressure drop, p_i, across radiator as a function of air flow, q.




Fig. 7 Performance chart. $f = f(I_{ap}); V_{ap} = f(I_{ap}); W_{o} = f(I_{a}).$

CONTINUOUS-WAVE MAGNETRON

Packaged, metal-ceramic, forced-air cooled, continuous-wave magnetron with integral r.f. cathode filter. The tube is primarily intended for use in diathermy and other low-power heating applications. The tube features cold start operation and high efficiency. A built in electromagnet allows output power control.

QUICK REFERENCE DATA

Frequency, matched load	f 2,46 GF	łz	
Output power	W _o 310 W		
Output power control	by electromagnet		
Construction	packaged, metal-ceramic		
Cathode	thoriated tungsten cold start, quick heating		
R.F. cathode filter	integral		
Cooling	forced air		

TYPICAL OPERATION

Tube coupled to waveguide section of Fig. 1.

Matched load in coaxial output line; for other load conditions see Fig. 3.

Anode supply

OPERATION A: Unsmoothed single-phase full-wave rectified voltage

OPERATION B: Pulsed

Conditions		A	В	
Filament voltage, a.c. 50 or 60 Hz	V_{f}	3,4	3,4	٧
peak	I _a I _{ap} 9min	150 750 500	900	mA mA I/min
	pį	20	20	Pa
Performance				
Filament current	If	15	15	Α
Anode voltage, peak	V_{ap}	3,0	3,0	kV
Frequency	f	2,46	2,46	GHz
Output power, VSWR < 1,05	Wo	300	310	W
Efficiency	η	68	68	%

HEATING					
Thoriated tungsten, cold start, quick-heating cathode					
Filament voltage	V_{f}		3,4	V ± 10	0%
Filament current at $V_f = 3.4 \text{ V}$, $I_a = 0$	If		15	A	
Cold filament resistance	R _{fo}		32	Ω m	
Pre-heating time (waiting time)	t _w		0		
GENERAL DATA Electrical					
Frequency, fixed within the band	f 2,4	150 to 2	2,470	GHz	
Phase for maximum output power	d		0,12	λ	
Mechanical Mounting position Mass	any	≈	1,1	kg	
LIMITING VALUES (Absolute maximum rating system) Filament voltage	Vf		3,75 3,05		
Anode current mean peak	la	max.	200 950	mA mA*	
Anode voltage	Va	max.	10	kV	
Temperature at reference point (see outline drawing)	Т	max.	180	oC	
Voltage-standing-wave-ratio	VSWR	max.	5		
Storage temperature		min.	-30	oC	
Electromagnetic coil dissipation (mean)	W _m	max.	25	W	
Electromagnetic coil voltage	v_{m}	max.	100	V	
COOLING					

COOLING Anode block

Required quantity of air, based on an air

inlet temperature of 50 °C max. under typical operating conditions

Pressure drop as a function of rate of flow

Direction of air flow through radiator arbitrary

To protect the magnetron from overheating, we recommend that a thermoswitch be mounted in the position shown on the outline drawing. Temperature at which the thermoswitch will switch off: see Fig. 5.

forced air

see Fig. 7.

min.

300 I/min

^{*} Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the R.F. loading conditions such as VSWR, phase of reflection, and coupling section. It also depends on peak anode current, mean anode current, and current waveform.

DESIGN AND OPERATING NOTES

General

Whenever operation of the magnetron at conditions substantially different from those indicated under Typical operation is considered the tube supplier should be consulted.

Filament supply

Simultaneous application of filament and anode voltage is permitted ('cold start'). The filament winding of the transformer must be well insulated from the primary winding since the anode is earthed and the cathode is at a high negative potential with respect to the anode and the primary winding.

Tube cleanness

The ceramic part of the output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a coupling section by means of the 4 bolts M5 (see outline drawing). To ensure good r.f. contact between the magnetron and the coupling section, the nuts should be fastened evenly.

FILTERS

Coupling filter of Fig. 1 meets CISPR11 recommendation up to 1 GHz. A filter meeting CISPR11 up to 18 GHz is also available.

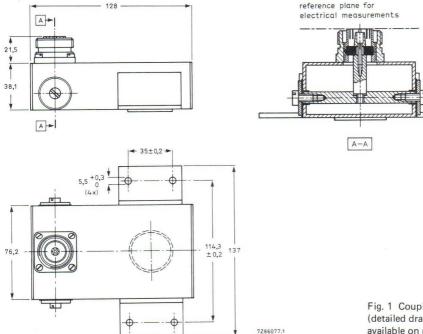


Fig. 1 Coupling filter (detailed drawings available on request).

Electromagnet

Electromagnet coil inductance

L_m 20 mH

Electromagnet coil resistance

R_m 10 Ω

 $I_{\mbox{\scriptsize m}}$ is positive when red connector is positive with respect to blue connector, see Fig. 3.

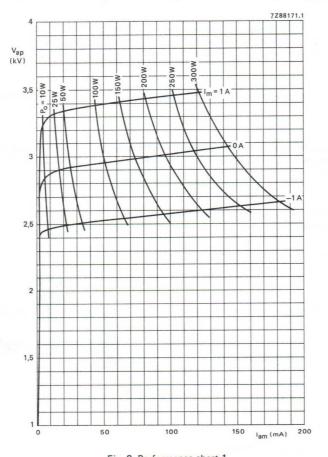

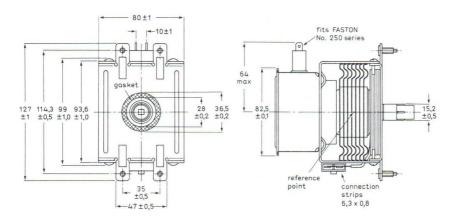


Fig. 2 Performance chart 1.

MECHANICAL DATA








Fig. 3.

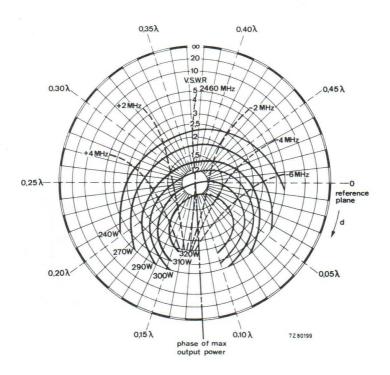


Fig. 4 Load diagram.

Reference plane	output of coupling section (see Fig. 1).
Anode supply	operation B: pulsed

0 A

3,4 V
150 mA
3 kV
2,46 GHz

d = distance of VSWR- minimum from reference plane towards load

Diagram measured in cold condition.

Electromagnetic coil current

Cooling characteristics

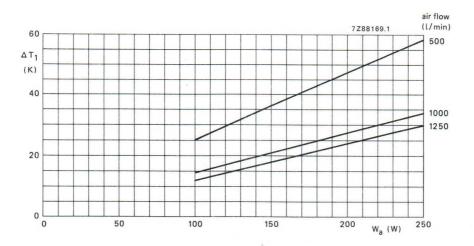


Fig. 5 Increase temperature of thermoswitch mounting position above inlet air temperature, ΔT_1 as a function of anode dissipation, W_a .

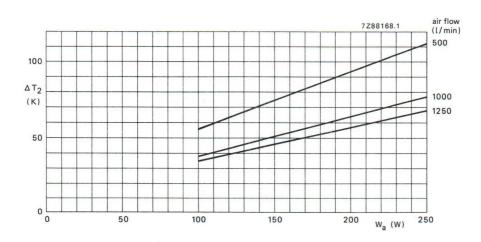


Fig. 6 Increase of anode temperature above inlet air temperature, ΔT_2 , as a function of anode dissipation, W_a . Anode dissipation = (peak anode voltage) x (average anode current) — (output power). $V_f = 3.4 \text{ V}$.




Fig. 7 Pressure drop, $p_{\tilde{i}},$ across radiator as a function of air flow, q.




Fig. 8 Performance chart 2. $f = f(I_{ap}); V_{ap} = f(I_{ap}; W_0 = f(I_a).$

CONTINUOUS-WAVE MAGNETRON

Packaged, metal-ceramic, forced-air cooled, continuous-wave magnetron with integral r.f. cathode filter. The tube is intended for microwave heating applications and features cold-start operation and high efficiency. Under typical operating conditions the output power is 1260 W. This lightweight tube may be mounted in any position.

QUICK REFERENCE DATA

Frequency, matched load	f	2,46 GHz
Output power	W_{o}	1260 W
Construction	packaged, metal-ce	ramic
thode thoriated tungsten, of quick heating		, cold start,
R.F. cathode filter	integral	
Cooling	forced-air	

TYPICAL OPERATION

-		
Co		

Control of the state of the sta			
Filament voltage	Vf	4,4	V
Anode supply (see Design and operating notes)	LC stabilized half-	wave d	oubler
Average anode current	la	400	mA
Cooling, rate of flow	q	1700	I/min
Pressure drop	Pi	190	Pa
Performance (at matched load see Fig. 6; for other load conditions see	Fig. 4)		
Filament current	If	14	A
Anode voltage, peak	V _{ap}	4,5	kV
Frequency	f	2,46	GHz
Output power, VSWR < 1,1	Wo	1260	W
Efficiency	η	70	%

Y.11540

HEATING

Thoriaded tungsten, cold start, quick-heating cathode 3,8 to 4,8 V V_f Filament voltage Filament current at V_f = 4,4 V, I_a = 0 14 A If 40 mΩ Cold filament resistance Rfo 10 s Pre-heating time (waiting time) tw min. **GENERAL DATA** Electrical f 2,445 to 2,47 GHz Frequency, fixed within the band Mechanical Mounting position any 1,3 kg Mass LIMITING VALUES (Absolute maximum rating system) 4.8 V max.

Filament voltage

Anode current mean

Anode voltage

Anode input power Temperature at reference point (see outline drawing)

Storage temperature Voltage standing-wave ratio during max. 0,02 S and max. 20% Vf min.

la max. Va max. Wia max.

Tsta

VSWR

VSWR

2 25 kW 180 °C** max. max. min. -30 °C

> 4 max. 10 * max.

3,8 V

450 mA

1600 mA* 10 kV

60 °C

* Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the r.f. loading conditions such as VSWR, phase of reflection, and coupling section. It also depends on peak anode current, mean anode current, and current waveform.

^{**} For short periods a maximum anode temperature of 240 °C may be allowed.

COOLING

Anode block

forced air

Required quantity of air, based on an air inlet temperature of 50 °C max. under typical operating conditions

q min. 1700 l/min see Fig. 6


Pressure drop as a function of rate of flow Direction of air flow through radiator

arbitrary

To protect the magnetron against overheating it is recommended that a thermoswitch be mounted in the position shown on the outline drawing. Temperature at which the thermoswitch will switch off: see Fig. 5.

ACCESSORIES

Dimensions in mm

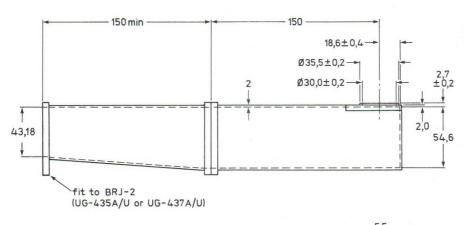

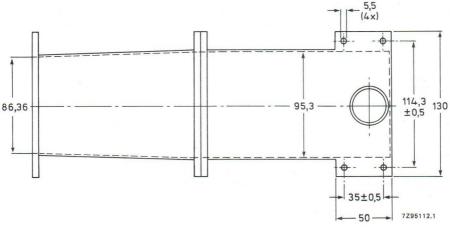


Fig. 1 Coupling section for YJ1540 into a waveguide R22.


DESIGN AND OPERATING NOTES

General

Whenever operation of the magnetron at conditions substantially different from those indicated under *Typical operation* is considered the tube supplier should be consulted.

Anode supply

The magnetron may be operated from an LC stabilized half-wave doubler anode supply unit.



L = leakage inductance of transformer T.

Fig. 2 Basic circuit of an LC stabilized half-wave doubler anode supply unit.

Filament supply

Simultaneous application of filament and anode voltage is permitted ('cold start', however, pre-heating of the filament for a few seconds is recommended to extend the life of the magnetron. The filament winding of the transformer must be well insulated from the primary winding since the anode is earthed and the cathode is at a high negative potential with respect to the anode and the primary winding.

When 'variable power control' is used, please contact the tube supplier.

Load impedance, measured with measuring probe

The measuring probe type 55396 enables the designer of the microwave oven to determine the value of the load impedance (VSWR and phase of reflection), using standard cold measuring techniques, and to arrive at the correct coupling for the magnetron. For the cold measurements the probe is coupled to the coupling section instead of the magnetron. The termination of the probe matches a standard N-type connector.

Assistance in the design of the h.f. part of the oven, including the magnetron coupling method, may be given by the tube manufacturer.

Tube cleanness

The ceramic part of the output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a coupling section by means of the 4 bolts M5 (see outline drawing). To ensure good r.f. contact between the magnetron and the coupling section, the nuts should be fastened evenly.


MECHANICAL DATA


Mounting position: any


Net mass:

approx. 1,1 kg

Dimensions in mm







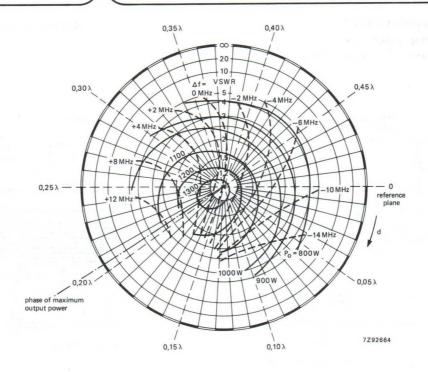


Fig. 4 Load diagram.

Reference plane:

antenna

Anode supply:

unfiltered single-phase full-wave

Filament voltage:

4,4 V

Average anode current:

400 mA

Peak anode voltage:

4,5 kV at matched load

Frequency at matched load:

2,46 GHz

d = distance of VSWR - minimum from reference plane towards load.

Diagram measured under cold condition.

Cooling characteristics

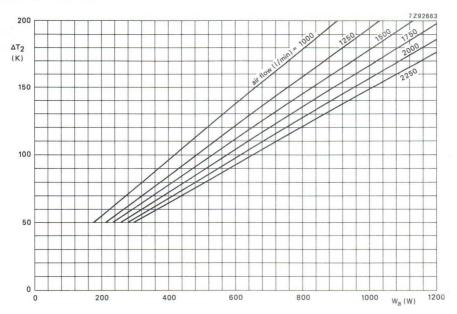


Fig. 5 Increase of anode temperature above inlet air temperature, ΔT_2 , as a function of anode dissipation, W_a . Anode dissipation = (peak anode voltage) x (average anode current) — (output power).




Fig. 6 Performance chart.




Fig. 7 Pressure drop, p_i , across radiator as a function of air flow, q.

CONTINUOUS-WAVE 5 kW MAGNETRON

Packaged, metal-ceramic, water-cooled continuous-wave magnetron with integral r.f. filter intended for use in industrial microwave heating applications. The tube features a quick-heating cathode, high efficiency, and has a typical output power of 5 kW. A built-in electromagnet allows output power control and stabilization.

QUICK REFERENCE DATA

Frequency, matched load, fixed within the band	f	2,45 to 2,47 GHz
Output power	Wo	5 kW
Output power control and stabilization	by el	ectromagnet
Construction	packa	aged, metal ceramic
Cathode	quick	heating thoriated tungsten
Cooling	water	r and air
R.F. cathode filter	integ	ral

TYPICAL OPERATION

Tube coupled to waveguide section of Fig. 6. VSWR = 2,5 in phase of maximum W_0 (d = 0,03 λ) measured with probe type 55386. Anode supply: three-phase full-wave rectified voltage.

Conditions, for 5 kW output power

Filament voltage, a.c. or d.c., starting	V_{f}	5,0	V ± 10%
Waiting time	t_{w}	10	S
Filament voltage, operating	V_{f}	see Fig. 3	
Anode current, mean	la	950	mA
Anode current, peak	lap	1200	mA
Cooling	see relevant	paragraph	

Performance

Filament current at V _f = 5,0 V	If	33 A
Electromagnet coil current at Tamb = 25 °C	Im	-1,7 A
Anode voltage, peak	V_{ap}	7,2 kV
Output power	Wo	5 kW
Frequency	f	2,46 GHz
Efficiency	η	72 %

For other load impedance and anode current conditions see Figs 8 and 9 and "Design and operating notes".

CATHODE: thoriated tungsten, quick start

HEATING: direct by a.c. (50 Hz or 60 Hz) or d.c.

Filament voltage, starting and stand-by	Vf	5,0 V ± 10%
Filament current at $V_f = 5.0 \text{ V}$; $I_a = 0$	If	33 A
Filament voltage, operating	see Fig. 3	
Cold filament resistance	Rfo	$23~\text{m}\Omega$
Waiting time (time before application of high voltage)	t _w m	in. 10 s
Immediately after applying the anode voltage the filament volt	tage must be reduced t	o the operating

COOLING

value, see Fig. 3.

Anode block, see Fig. 1	water
R.F. filter box, see Fig. 2 Required rate of flow at 25 °C at 50 °C	air q min. 100 l/min. 120 l/min.
Antenna, see Fig. 2 Required rate of flow at 25 °C at 50 °C	air q min. 50 l/min. 60 l/min.

With only the filament voltage applied some water and air cooling is required.

To safeguard the magnetron against overheating it is recommended to mount a thermoswitch, see outline drawing. This switch should operate at a temperature of 80 \pm 5 °C.




Fig. 1 Pressure drop and maximum inlet temperature as a function of waterflow.




Fig. 2 Pressure drop filterbox and antenna-cap cooling as a function of airflow.

ELECTRICAL DATA					
Frequency, matched load, fixed within the band	f	2,450 to	2,470	GHz	
Phase for maximum output power	d		0,03	λ	
Coil inductance (parallel)	R _e L _e		4,1 20	Ω mH	
LIMITING VALUES (Absolute maximum rating system)					
Filament voltage, starting	Vf	max. min.	5,5 4,5		
Anode current, mean	la	min. max.	100 1100	2.00	
Anode current, peak	lap	max.	1300	mA*	
Anode voltage	Va	max.	10	kV	
Temperature at reference point, see outline drawing	T	max.	85	oC	
Seal temperature	Ts	max.	220	oC	
Cooling water outlet temperature, closed cooling circuit open cooling circuit	T _o	max.		°C	
Cooling air temperature	Tair	max.	50	oC	
Voltage standing-wave ratio	VSWR	max.	4,0		
Storage temperature	T_{st}	min.	-30	oC	
Electromagnet coil current (parallel)	Im	max.	5	Α	
Voltage between coil and tube	V_c	max.	48	V	




Fig. 3 Filament voltage reduction curve with applied anode voltage. Filament starting voltage without anode voltage is 5,0 V \pm 10%.

^{*} Under no circumstances should the magnetron be permitted to mode. Amongst other conditions, the moding stability of a magnetron depends on the r.f. loading conditions such as VSWR, phase of reflection and coupling section. It also depends on peak anode current, mean anode current and current waveform.

MECHANICAL DATA

Dimensions in mm

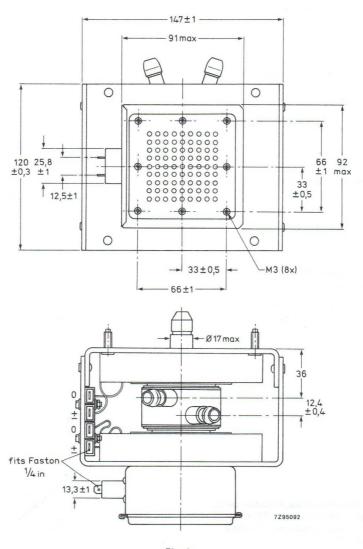


Fig. 4a.

Mounting position: any

Mass: approx. 4,3 kg

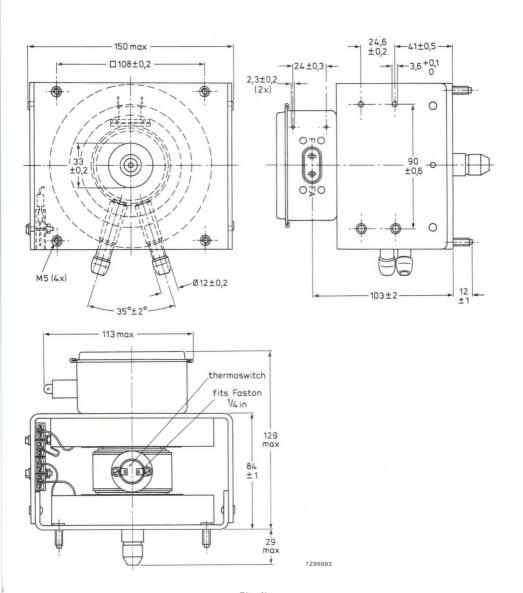


Fig. 4b.

DESIGN AND OPERATING NOTES

General

The manufacturer should be consulted when cycled operation or operation without circulator is chosen or when it is considered necessary to operate the magnetron at conditions substantially different from those stated under "Typical operation", or with deviating power supply/control circuitry.

Tube cleanness

The ceramic part of the output structure of the tube must be kept clean and dry during installation and operation.

Mounting

The magnetron should be mounted on a coupling section by means of four M5 bolts (see outline drawing). To ensure good r.f. contact these nuts should be tightened evenly.

ACCESSORIES

An r.f. gasket, catalogue number 8222 033 90851 is supplied with each tube.

A measuring probe 55386, see Fig. 5.

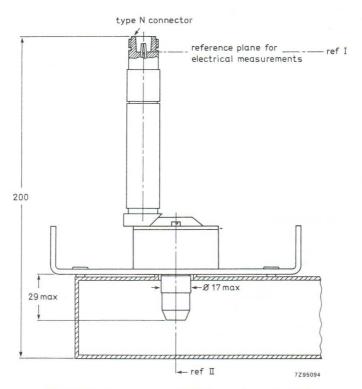
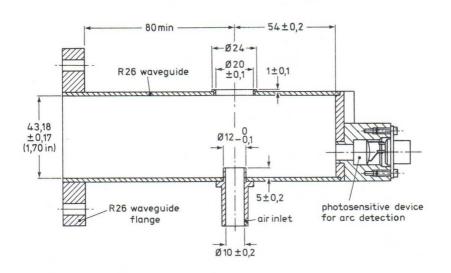


Fig. 5 Measuring probe type 55386 in coupling section R26.



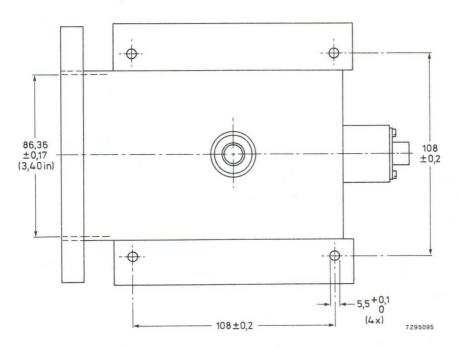
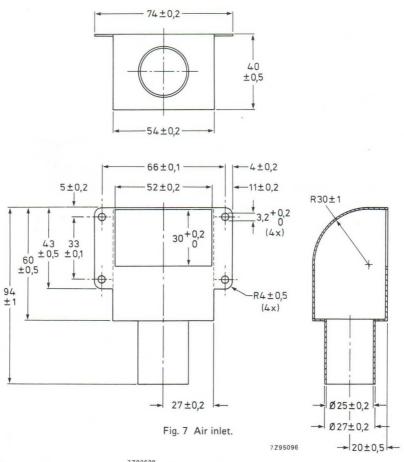


Fig. 6 Waveguide assembly.






Fig. 8 Peak anode voltage, V_{ap} , as a function of peak anode current, I_{ap} . Frequency, f, as a function of peak anode current I_{ap} .

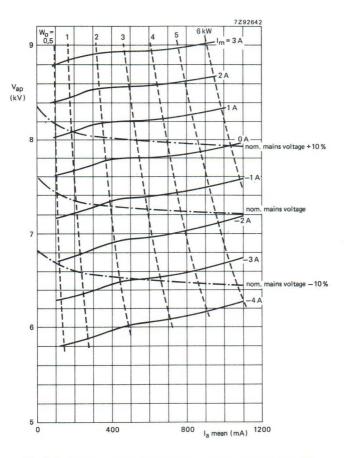


Fig. 9 Performance chart. Conditions: magnet temperature 25 $^{\rm o}$ C; load impedance 2,5 sink.

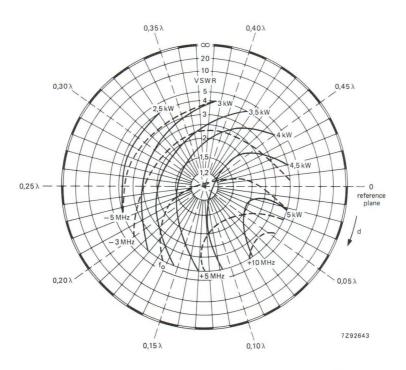


Fig. 10 Load diagram in waveguide.

CONTINUOUS-WAVE MAGNETRON

Integral-magnet, air-cooled or heatsink-cooled continuous-wave magnetron intended for diathermy and other low-power heating applications.

QUICK REFERENCE DATA

f 2,425 to 2,475 GHz
W _o 200 W
packaged
nickel matrix type

CATHODE: nickel matrix type

HEATING: indirect by a.c. 50 Hz to 60 Hz, or d.c.

	Operation	A, B, and D	Operation	C
Heater voltage, starting and stand-by	Vf	5,3	4,	8 V ± 10%
Hetar current at starting voltage	If	3,5	3,	3 A
Heater current, peak starting	Ifp	max.	8,5	A
Cold heater resistance	R _{fo}		0,2	Ω
Waiting time	t _w mi	n. 180	min. 24	0 s

TYPICAL CHARACTERISTICS

Measured under matched load conditions (VSWR < 1,05) and d.c. anode voltage.

	Contractor of the contract of		
Frequency, fixed within the band	f	2,425 to 2,475	GHz
Anode voltage, d.c.	Va	1,55 to 1,70	kV
Anode current	la	200	mA

COOLING

 a. Low velocity air flow with a rate of flow of 0,4 to 0,5 m³/min. Direction of air flow, see outline drawing. The air flow need not be ducted.

or


b. Heatsink. The tube does not require any extra cooling provided it is effectively mounted on a heat-conducting non-magnetic plate. A vertical position of this plate facilitates the heat transfer.


MECHANICAL DATA

Net mass: approx. 2,4 kg Mounting position: any

Base: octal

The socket for this base should not be rigidly mounted, it should have flexible leads and be allowed to move freely.

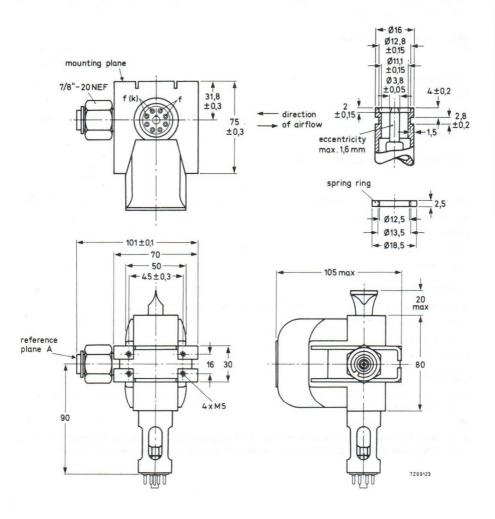


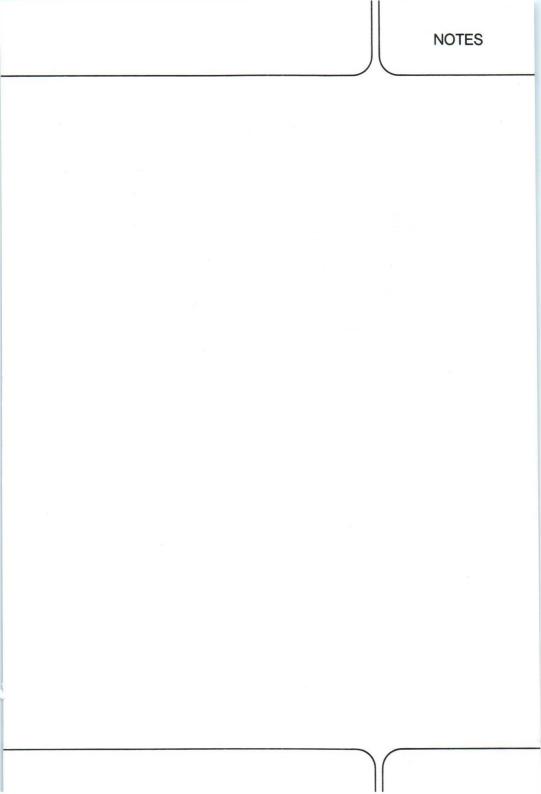


INDEX OF TYPE NUMBERS


type	page
YJ1160	31
YJ1162	38
YJ1191	40
YJ1193	41
YJ1193E	55
YJ1194	68
YJ1195	41
YJ1195E	55
YJ1280	69
YJ1441	77


type	page		
YJ1442	87		
YJ1481	97		
YJ1500	107		
YJ1510	115		
YJ1511	123		
YJ1530	131		
YJ1540	139		
YJ1600	147		
7090	157		

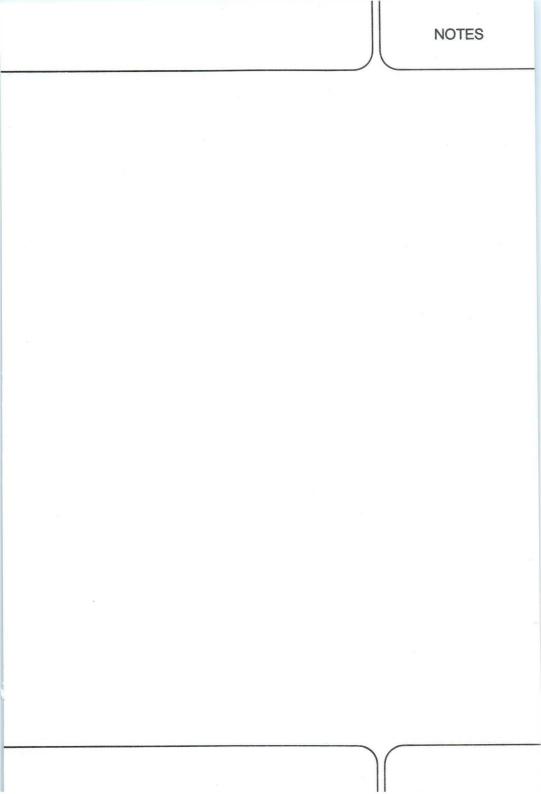


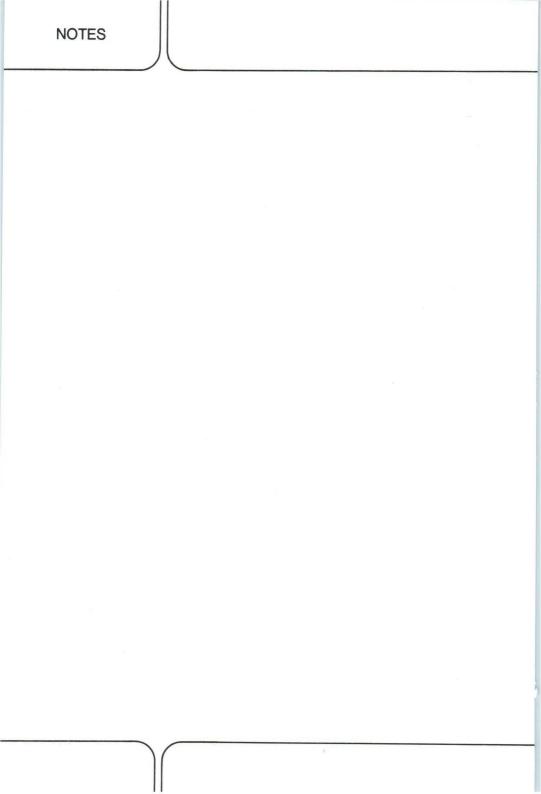





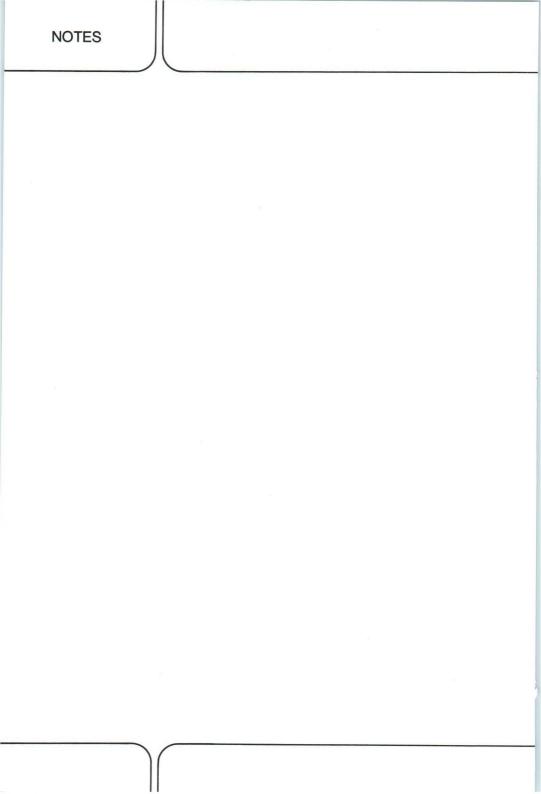


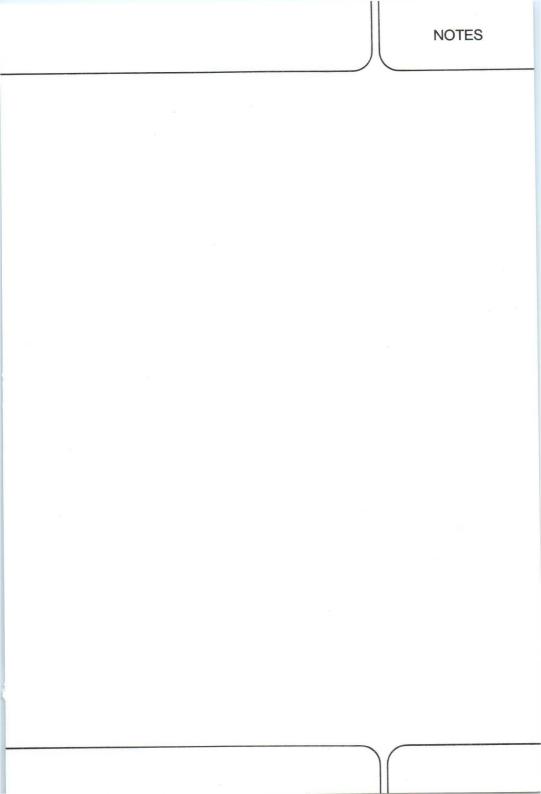

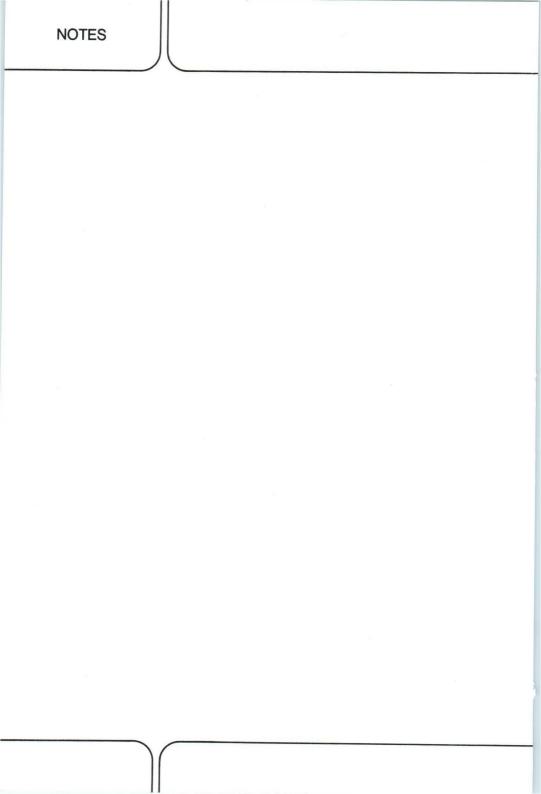

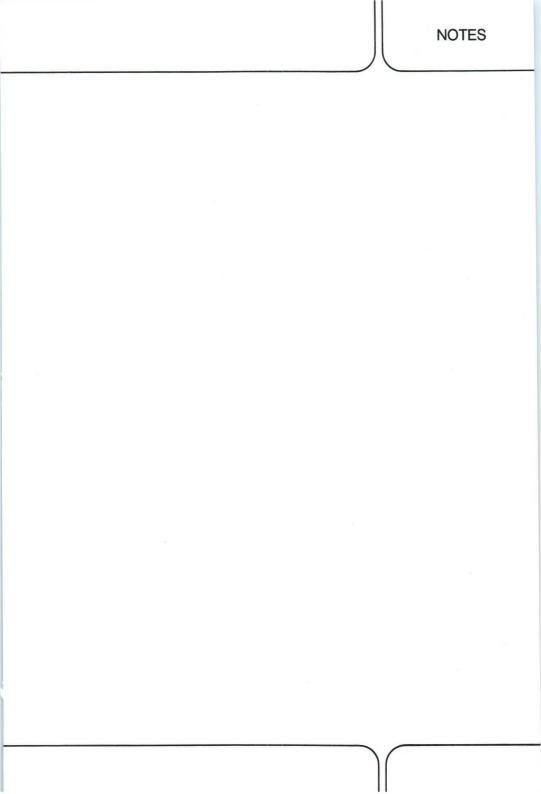

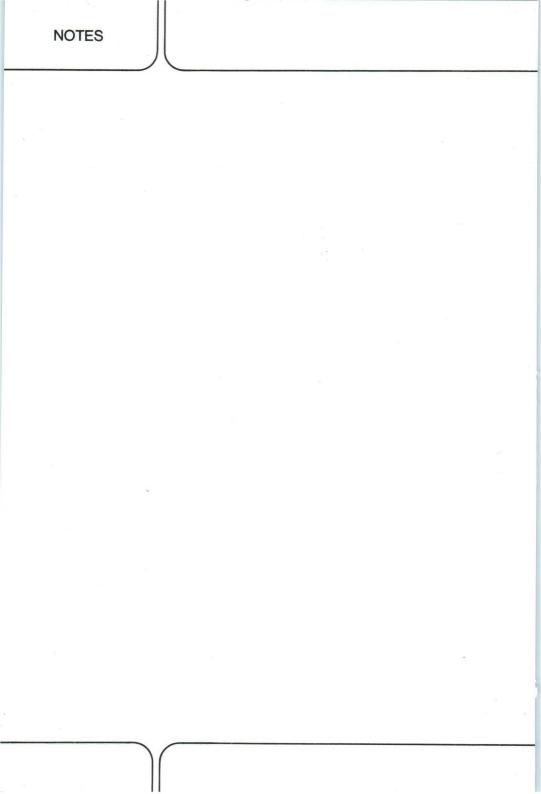



Electronic components and materials for professional, industrial and consumer uses from the world-wide Philips Group of Companies

Argentina: PHILIPS ARGENTINA S.A., Div. Elcoma, Vedia 3892, 1430 BUENOS AIRES, Tel. 541-7141/7242/7343/7444/7545.

Australia: PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division, 67 Mars Road, LANE COVE, 2066, N.S.W., Tel. 427 08 88,

Austria: ÖSTERREICHISCHE PHILIPS BAUELEMENTE INDUSTRIE G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 629111. Belgium: N.V. PHILIPS & MBLE ASSOCIATED, 9 rue du Pavillon, B-1030 BRUXELLES, Tel. (02) 2427400.

Brazil: IBRAPE, Caixa Postal 7383, Av. Brigadeiro Faria Lima, 1735 SAO PAULO, SP, Tel. (011) 211-2600.

Canada: PHILIPS ELECTRONICS LTD., Electron Devices Div., 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. 292-5161.

Chile: PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. 39-4001.

Colombia: IND. PHILIPS DE COLOMBIA S.A., c/o IPRELENSO LTD., Calle 17, No. 9-21, Of. 202, BOGOTA, D.E., Tel. 57-2347493.

Denmark: MINIWATT A/S, Strandlodsvej 2, P.O. Box 1919, DK 2300 COPENHAGEN S, Tel. (01) 541133.

Finland: OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. 17271.

France: R.T.C. LA RADIOTECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 338 80-00.

Germany (Fed. Republic): VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-0.

Greece: PHILIPS S.A. HELLENIQUE, Elcoma Division, 52, Av. Syngrou, ATHENS, Tel. 9215111.

Hong Kong: PHILIPS HONG KONG LTD., Elcoma Div., 15/F Phillips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0)-245121.

India: PEICO ELECTRONICS & ELECTRICALS LTD., Elcoma Dept., Band Box Building,

254-D Dr. Annie Besant Rd., BOMBAY - 400 025, Tel. 4220387/4220311.

Indonesia: P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Panim Bank Building, 2nd Fl., Jl. Jend. Sudirman, P.O. Box 223, JAKARTA, Tel. 716131.

Ireland: PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 693355.

Italy: PHILIPS S.p.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2-6752.1.

Japan: NIHON PHILIPS CORP., Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611.

(IC Products) SIGNETICS JAPAN LTD., 8-7 Sanbancho Chiyoda-ku, TOKYO 102, Tel. (03) 230-1521.

Korea (Republic of): PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL, Tel. 794-4202.

Malaysia: PHILIPS MALAYSIA SDN. BERHAD, No. 4 Persiaran Barat, Petaling Jaya, P.O.B. 2163, KUALA LUMPUR, Selangor, Tel. 774411.

Mexico: ELECTRONICA, S.A de C.V., Carr. México-Toluca km. 62.5, TOLUCA, Edo. de México 50140, Tel. Toluca 91 (721) 613-00.

Netherlands: PHILIPS NEDERLAND, Marktgroep Elonco, Postbus 90050, 5600 PB EINDHOVEN, Tel. (040) 793333 New Zealand: PHILIPS ELECTRICAL IND. LTD., Elcoma Division, 110 Mt. Eden Road, C.P.O. Box 1041, AUCKLAND, Tel. 605-914.

Norway: NORSK A/S PHILIPS, Electronica Dept., Sandstuveien 70, OSLO 6, Tel. 68 02 00.

Peru: CADESA, Av. Alfonso Ugarte 1268, LIMA 5, Tel. 326070.

Philippines: PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tamo, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. 86-89-51 to 59,

Portugal: PHILIPS PORTUGUESA S.A.R.L., Av. Eng. Duarte Pacheco 6, 1009 LISBOA Codex, Tel. 683121.

Singapore: PHILIPS PROJECT DEV. (Singapore) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 2538811.

South Africa: EDAC (PTY.) LTD., 3rd Floor Rainer House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001, Tel. 614-2362/9.

Spain: MINIWATT S.A., Balmes 22, BARCELONA 7, Tel. 301 63 12.

Sweden: PHILIPS KOMPONENTER A.B., Lidingövägen 50, S-11584 STOCKHOLM 27, Tel. 08/7821000.

Switzerland: PHILIPS A.G., Elcoma Dept., Allmendstrasse 140-142, CH-8027 ZÜRICH, Tel. 01-488 22 11.

Taiwan: PHILIPS TAIWAN LTD., 3rd Fl., San Min Building, 57-1, Chung Shan N, Rd, Section 2, P.O. Box 22978, TAIPEI, Tel. (02)-5631717.

Thailand: PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Silom Road, P.O. Box 961, BANGKOK, Tel. 233-6330-9.

Turkey: TÜRK PHILIPS TICARET A.S., Elcoma Department, Inönü Cad. No. 78-80. ISTANBUL, Tel. 435910.

United Kingdom: MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-5806633. United States: (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000. (Passive Devices) MEPCO/ELECTRA INC., Columbia Rd., MORRISTOWN, N.J. 07960, Tel. (201) 539-2000.

(Passive Devices & Electromechanical Devices) CENTRALAB INC., 5855 N. Glen Park Rd., MILWAUKEE, WI 53201, Tel. (414)228-7380. (IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 739-7700.

Uruguay: LUZILECTRON S.A., Avda Uruguay 1287, P.O. Box 907, MONTEVIDEO, Tel, 91 4321,

Venezuela: IND. VENEZOLANAS PHILIPS S.A., Elcoma Dept., A. Ppal de los Ruices, Edif. Centro Colgate, CARACAS, Tel. 360511

For all other countries apply to: Philips Electronic Components and Materials Division, International Business Relations, Building BAE, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Tel. +3140723304, Telex 35000 phtcnl

A43

©1985 Philips Export B.V

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part, without the written consent of the publisher.