

TUNG-SOL

CATHODE RAY

THE 16GP4, 16GP4A, 16GP4B, AND 16GP4C ARE DIRECT-VIEW PICTURE TUBES DESIGNED FOR USE IN TELEVISION APPLICATIONS. THEY ARE IDENTICAL EXCEPT FOR THEIR FACEPLATES WHICH ARE AS FOLLOWS:

16GP4 - GREY FILTER FACEPLATE 16GP4B - GREY FILTER - PROSTED
 16GP4A - CLEAR GLASS FACEPLATE 16GP4C - CLEAR GLASS - PROSTED

THEIR COMMON FEATURES INCLUDE:

UNIPOTENTIAL CATHODE ROUND METAL CONSTRUCTION
 MAGNETIC FOCUS & DEFLECTION EXTERNAL SINGLE FIELD ION TRAP
 10" X 13 1/4" RASTER SIZE

ELECTRICAL DATA

| | | | |
|-----------------------------------------------|--|----|----------|
| FOCUSING METHOD | | | MAGNETIC |
| DEFLECTING METHOD | | | MAGNETIC |
| DEFLECTION ANGLE (APPROX.) | | 70 | DEGREES |
| DIRECT INTERELECTRODE CAPACITANCES (APPROX.): | | | |
| CATHODE TO ALL OTHER ELECTRODES | | 5 | μf |
| GRID #1 TO ALL OTHER ELECTRODES | | 6 | μf |

OPTICAL DATA


| | | | |
|--------------------------------------------------|--------|-----|---------|
| PHOSPHOR NUMBER | | | NO. 4 |
| FLUORESCENT COLOR | | | WHITE |
| PHOSPHORESCENT COLOR | | | WHITE |
| PERSISTENCE | | | MEDIUM |
| FACEPLATE LIGHT TRANSMISSION AT CENTER (APPROX.) | | 65 | PERCENT |
| SPECULAR REFLECTION OF AMBIENT LIGHT | 16GP4B | 2.5 | PERCENT |

MECHANICAL DATA

| | | | |
|--------------------------------|--|----------------------------|--------|
| OVERALL LENGTH | | 17 11/16 | INCHES |
| GREATEST DIAMETER OF BULB | | 15 7/8 ± 1/8 | INCHES |
| MINIMUM USEFUL SCREEN DIAMETER | | 14 3/8 | INCHES |
| BULB CONTACT | | METAL SHELL LIP | |
| BASE | | SMALL SHELL DUODECAL 5 PIN | B5-57 |
| BASING | | | 12D |

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID NO. 1
 PIN 10 - GRID NO. 2
 PIN 11 - CATHODE



PIN 12 - HEATER
 METAL SHELL LIP:
 ANODE
 GRID NO. 3

BOTTOM VIEW

CONTINUED ON FOLLOWING PAGE

PHOTOGRAPH BY U. S. A.

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS
DESIGN CENTER VALUES

| | | |
|------------------------------------------------|--------|-------|
| HEATER VOLTAGE | 6.3 | VOLTS |
| HEATER CURRENT | 0.6 | AMP. |
| MAXIMUM DC ANODE, GRID 3 VOLTAGE ^A | 14 000 | VOLTS |
| MAXIMUM DC GRID #2 VOLTAGE | 410 | VOLTS |
| MAXIMUM GRID #1 VOLTAGE: | | |
| DC NEGATIVE-BIAS VALUE | 125 | VOLTS |
| DC POSITIVE-BIAS VALUE | 0 | VOLTS |
| POSITIVE-PEAK VALUE | 2 | VOLTS |
| MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE: | | |
| HEATER NEGATIVE WITH RESPECT TO CATHODE | | |
| DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS | 410 | VOLTS |
| AFTER EQUIPMENT WARM-UP PERIOD | 150 | VOLTS |
| HEATER POSITIVE WITH RESPECT TO CATHODE | 150 | VOLTS |

^ATHE PRODUCT OF ANODE VOLTAGE AND AVERAGE ANODE CURRENT SHOULD BE LIMITED TO 6 WATTS.

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

| | | | |
|-------------------------------------------------|------------------------|----------|----------|
| DC ANODE, GRID #3 VOLTAGE ^B | 12 000 | VOLTS | |
| DC GRID #2 VOLTAGE | 300 | VOLTS | |
| DC GRID #1 VOLTAGE ^C | -33 TO -77 | VOLTS | |
| DC FOCUSING COIL CURRENT (APPROX.) ^D | 100 | MA. | |
| ION TRAP MAGNET (RATED STRENGTH) | 23 | GAUSSSES | |
| | 16GP4A AND 16GP4B ONLY | 35 | GAUSSSES |

^BBRILLIANCE AND DEFINITION DECREASE WITH DECREASING ANODE VOLTAGE. IN GENERAL, THE ANODE VOLTAGE SHOULD NOT BE LESS THAN 12,000 VOLTS.


^CVISUAL EXTINCTION OF UNDEFLECTED FOCUSED SPOT.

^DFOR STANDARD FOCUS COIL #109, OR EQUIVALENT, WITH THE COMBINED GRID #1 BIAS VOLTAGE AND VIDEO SIGNAL VOLTAGE ADJUSTED TO PRODUCE A HIGHLIGHT BRIGHTNESS OF 30 FOOT LAMBERTS ON A 10" BY 13 1/4" PICTURE SIZE. DISTANCE FROM REFERENCE LINE TO CENTER OF AIR GAP ON FOCUS COIL SHALL BE 3 INCHES.

CIRCUIT VALUES

| | | |
|------------------------------------|-----|----------|
| MAXIMUM GRID #1 CIRCUIT RESISTANCE | 1.5 | MEG OHMS |
|------------------------------------|-----|----------|

TUNG-SOL

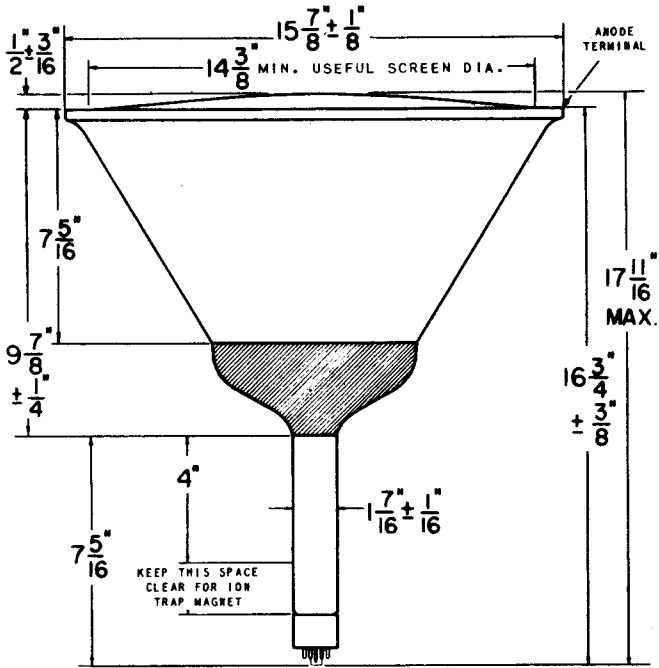

PRINTED IN U. S. A.