

# SINGLE DIODE

# DA90

Indirectly-heated single diode primarily intended for use in battery-operated equipment.

## HEATER

$V_h$	1.4	V
$I_h$	0.15	A

**MOUNTING POSITION** Any


## CAPACITANCES (measured without external shield)

$C_{a-k}$	0.4	$\mu\mu\text{F}$
$C_{a-h}$	0.8	$\mu\mu\text{F}$
$C_{h-k}$	0.6	$\mu\mu\text{F}$

**RESONANT FREQUENCY** (approximate) 1,000 Mc/s

## LIMITING VALUES

P.I.V. max.	330	V
$I_a$ max.	0.5	mA
$I_{a(pk)}$ max.	5	mA
$V_{h-k}$ max.	140	V

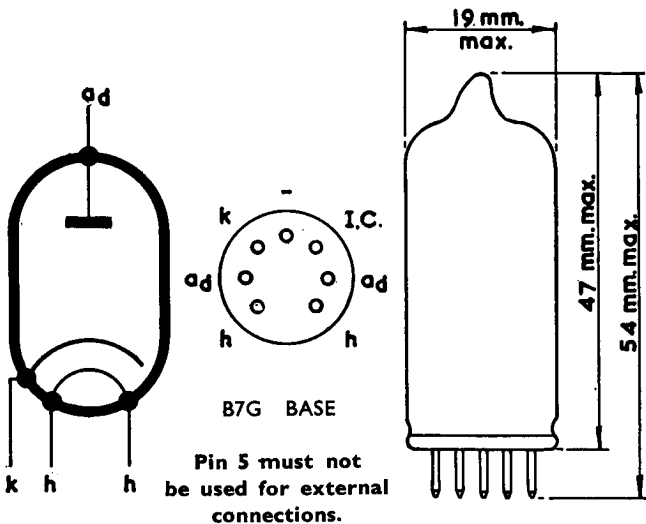

# DA90

## SINGLE DIODE

Indirectly-heated single diode primarily intended  
for use in battery-operated equipment.

