-Standard Valves-

4047-B VALVE

(Replaces the 4047-A Valve which has now been abandoned)

SINGLE ENDED WATER COOLED TRIODE.

Cathode.

SPECIFICATION.

Pure tungsten filament. Constant voltage type.

Water Jacket.

Type MS.1362 Grp. 1 for anode dissipation up to 6 Kw.

Type MS.1362 Grp. 20 for anode dissipation up to 6 Kw., used for below panel connection.

Types 223 111 IA or Pl. 122011 (3001-A) for

Types 223 LU IA or PL 122011 (3001-A) for anode dissipation over 6 Kw.

Water Flow.

5 gallons per minute.

Dimensions.

Max. overall length Max. bulb diameter Net weight $21\frac{1}{4}$ " (54 cms.) $3\frac{9}{16}$ " (9.05 cms.) $3\frac{3}{4}$ lbs. (1,700 gms.)

Constants.

Filament voltage 18—20 volts (exact filament voltage marked on bulb)

Nominal filament current 59 amps.


Total emission 6 amps.
*Impedance 7,500 ohms
*Amplification factor 40

*Mutual conductance 5.3 mA. per volt Grid-anode capacity 24 $\mu\mu$ F.

Grid-anode capacity 24 $\mu\mu$ F. Anode-filament capacity 2 $\mu\mu$ F. Grid-filament capacity 17 $\mu\mu$ F.

* at anode current of 0.75 amp.

1-73" F

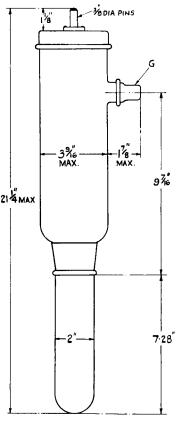

LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage

Maximum direct anode voltage for anode modulation

Maximum direct anode current

Maximum anode dissipation

Maximum grid dissipation

Maximum frequency for above ratings

Maximum anode voltage for frequency of 6 Mc.

13,000 volts
10,000 volts
1.5 amp.
200 watts
200 watts
3 Mc.
7,500 volts

NOTE.—The characteristics of this valve are identical with those of the 4047-A Valve but the grid lead has been brought out through the side of the bulb. When the 4047-B is used to replace the 4047-A new grid connectors will be required. These connectors type ES.5706-I should be ordered with the valve.

-Standard Valves-

TYPICAL OPERATING CONDITIONS.

	Class B A.F. Amp. or Mod. For balanced 2 valve circuit
Direct anode voltage Grid bias	10,000 volts —120 to —170 volts
Direct anode current per valve—zero signal Direct anode current per valve—maximum signal	0·25 amps. I·2 amps.
Load resistance—anode to anode Maximum signal output—2 valves	7,500 ohms 13·2 Kw.
Anode dissipation	5.4 Kw.

RADIO FREQUENCY OPERATION.

	Class B Telephony Modulated carrier applied to grid	ony Telephony ted Subject to er anode	Class C Telegraphy Unmodulated
Direct anode voltage Direct anode current Grid bias	10,000 0-75 —200	7,000 0.75 —300	10,000 volts 1-5 amps. —500 to —750 volts
Anode dissipation Carrier output	5 2·5	I∙75 3∙5	5 Kw.

-Standard Valves-

These curves are taken with A.C. filament heating, grid and anode voltages being referred to the centre point of the filament.

